

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D


C

B

A

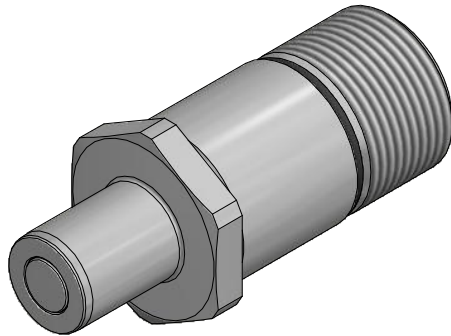

1 : 1

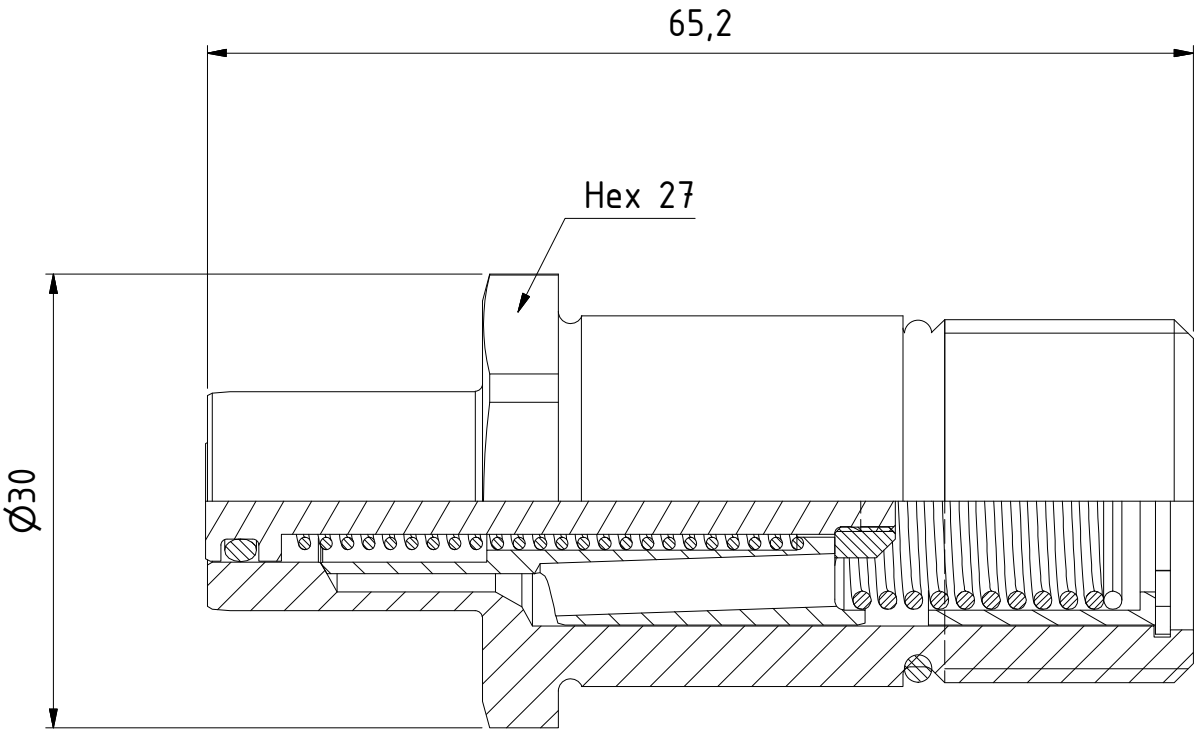

Product No. 109246552

Nominal flow $\varnothing$ DN: 6 mm
Connection Stroke: - mm
Max WP Connected: 35 bar
Max WP Disconnected: 35 bar
Min BP Connected: 140 bar
Min BP Disconnected: 140 bar
Temperature range: -30°C - +100°C
Connection: M24x1,5 Male
Sealing material: NBR
Hexagon: 27

10	1	Spring	Stainless steel
9	1	Spring	Stainless steel
8	1	O-ring	NBR
7	1	O-ring	NBR
6	1	Stop for valve	Brass
5	1	Lock ring	Stainless steel
4	1	Nut	Brass
3	1	Valve	Brass, Ni 8
2	1	Valve sleeve	Brass
1	1	Nipple body	Brass, Silver
Item	Qty	Description	Material



Scale 2 : 1	Drawn EP7	Checked	Appr.	ECO	Date 2018-01-15	
Assembly Drawing			Drawing No. 509246552		Issue AA	Sheet 1 /(1)