


Dessa r  tigheten f  rbeh  lls.
All rights reserved.
Alle Rechte vorbehalten.

Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdr  ckliche Genehmigung kopiert oder auf andere Weise verv  iltigt werden.
werden. Zuwiderhandlungen werden gerichtlich verfolgt.

Denna handling f  r ej utan v  rt medgivande delges annan, kopieras eller eljest   berf  rigen anv  ndas.
  vertr  delse h  rvid beivras med st  d av g  llande lag.
This document must not be copied, either completely or in part, without permission.
Any infringement will have legal consequences.

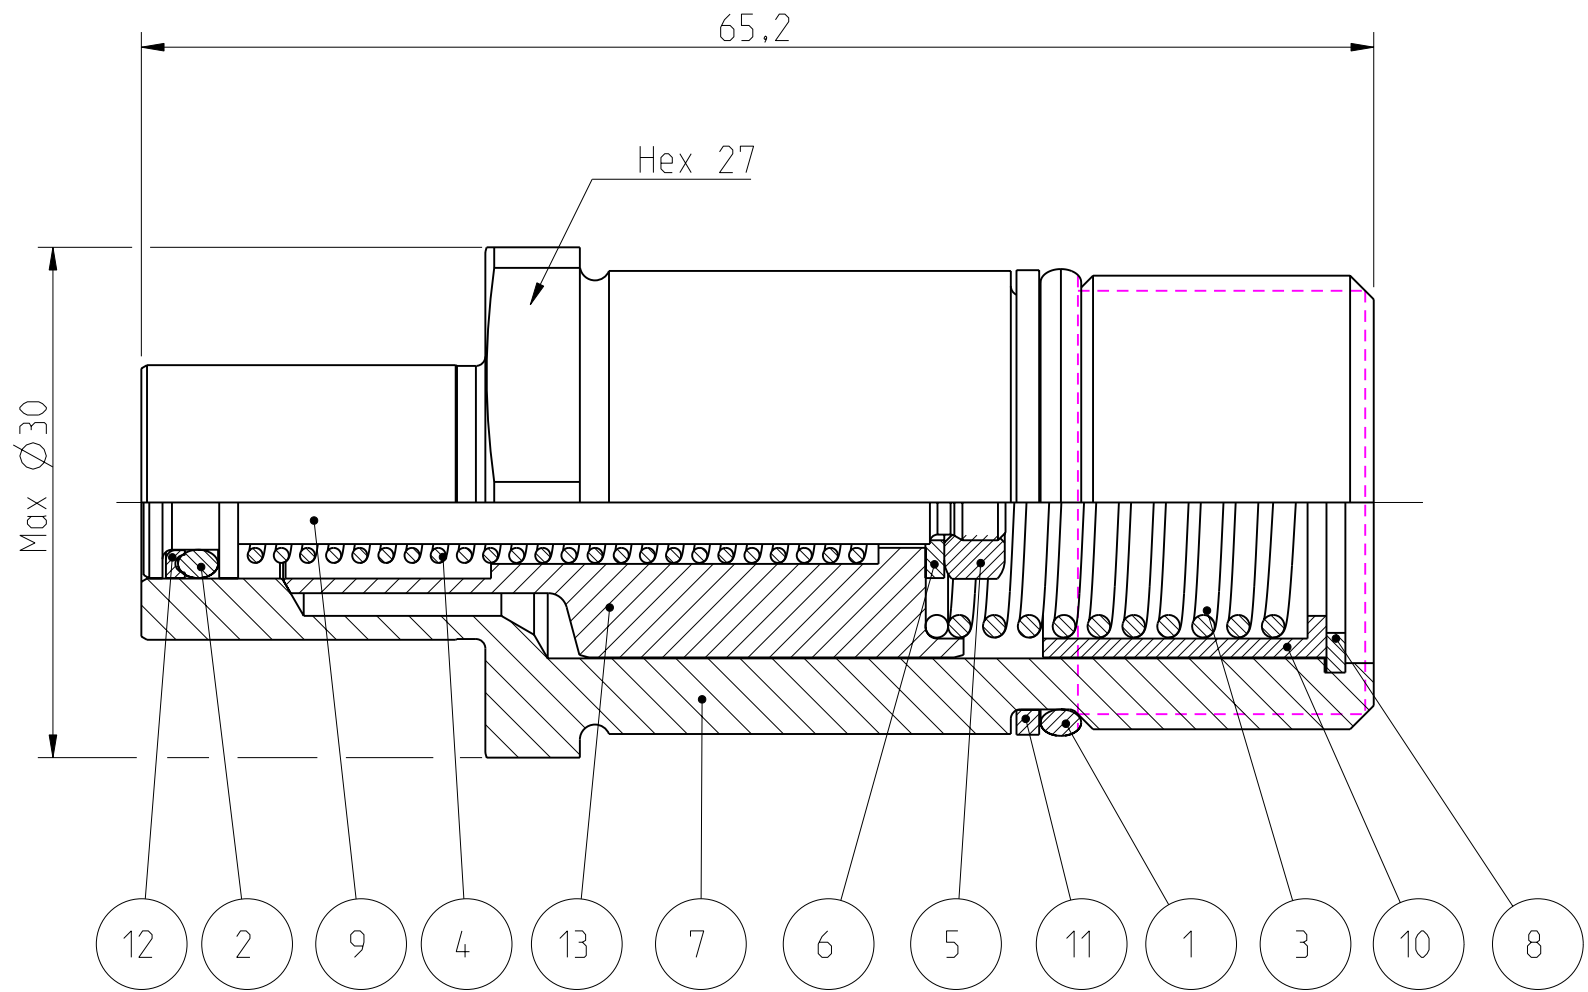

13	1	Valve sleeve	Steel
12	1	Back-up ring	PTFE
11	1	Back-up ring	PUR
10	1	Stop for valve	Steel
9	1	Valve	Hard. steel, black finished
8	1	Lock ring	Steel, FeZn
7	1	Nipple body	Hard. steel, black finished
6	1	Washer	Steel, FeZn
5	1	Nut	Steel, FeZn
4	1	Spring	Stainless steel
3	1	Spring	Stainless steel
2	1	O-ring	NBR
1	1	O-ring	NBR
Detalj Item	Antal Quant.	Ben��mning Description	Material Material

Product no: 10_925_6552		
Max working pressure:	300	bar connected
	300	bar disconnected
Min burst pressure:	970	bar connected
	970	bar disconnected
Sealing material:	NBR	
Temperatur range:	-20��C - +100 ��C	
Nominal flow diameter,DN:	6	mm
Connection	M24x1,5 Male	
Connection stroke:	18.2	mm

	Skala Scale	5:2	Ritad Drawn	MAh	Kontr. Checked	–	Godk. Appr.	KK	ÄM nr. Alt. no.	Dat. Date	070812
	Assembly drawing							Ritning nr/Drawing No.		Utg./Issue	
							50_925_6552		AA		