

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

A3

D

C

B



A

D


C

B

A

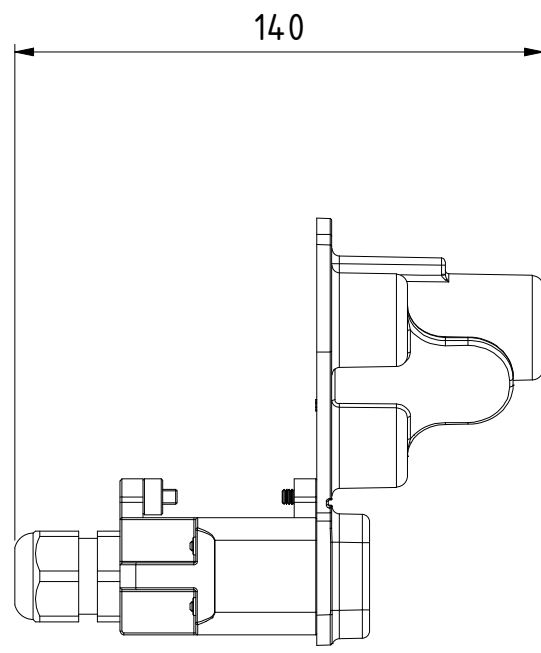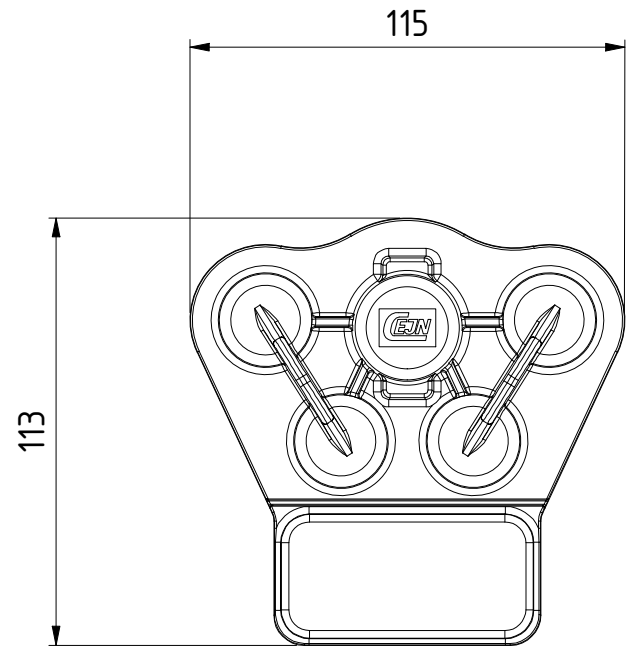

Both of the screws (6) shall be used if the electrical kit is mounted to a Multi-X classic.

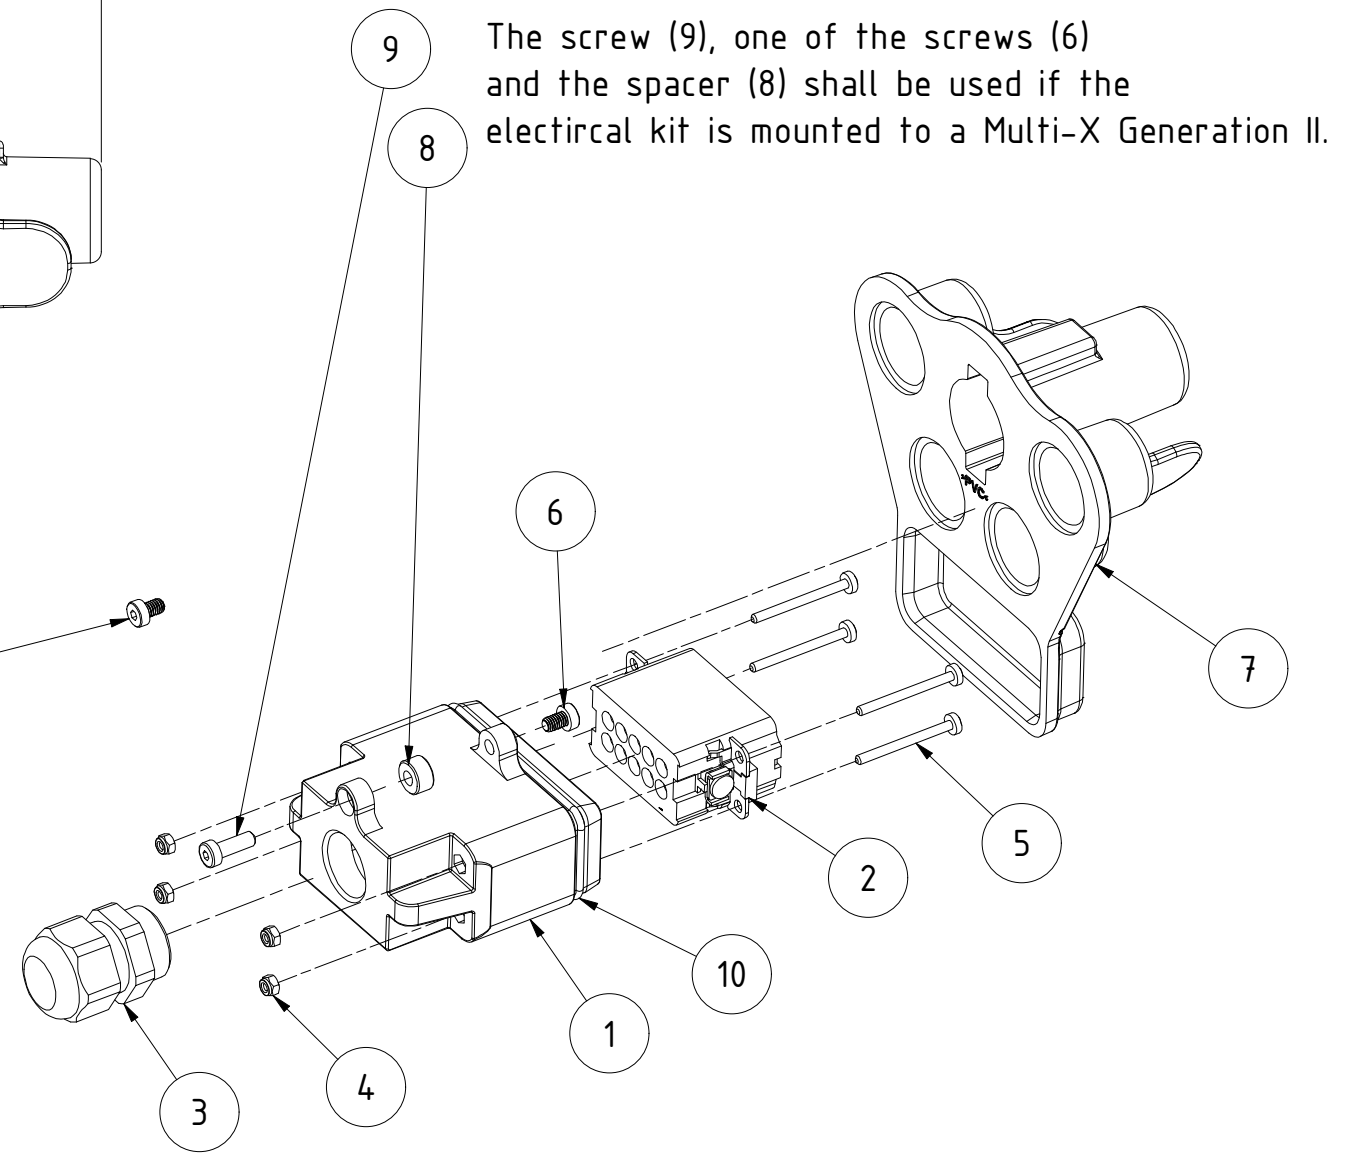

Product No. 109320052

Nominal flow $\varnothing$ DN: mm
Connection Stroke: mm
Max WP Connected: bar
Max WP Disconnected: bar
Min BP Connected: bar
Min BP Disconnected: bar
Temperature range: °C - °C
Connection:
Sealing material:
Hexagon:

10	1	O-ring	FPM	099322810
9	1	Screw MLC6S M4x12	8.8 FZB	099320925
8	1	Spacer	Aluminium, plated	099327074
7	1	Dust Cap	PVC	099321061
6	2	Screw	Steel / FZB	099320901
5	4	Screw	Steel FZB	099320904
4	4	Nut	Steel FZB	099320802
3	1	Cable fitting	Plastic	099337042
2	1	Contact insert	Plastic	099327031
1	1	Connector house	Plastic	099327021
Item	Qty	Description	Material	Part Number

	Scale	1 : 2	Drawn	EP	Checked	JoEr	Appr.	PMB	ECO	12518	Date	2019-06-04			
	Assembly Drawing					Drawing No.					109320052		Issue	C	Sheet

Assembly Drawing 109320052