

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B


A

D


C

B

A

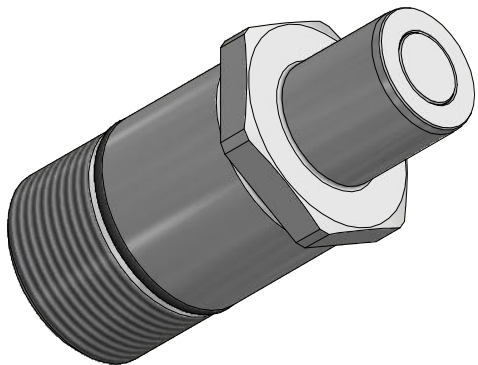

1 : 1

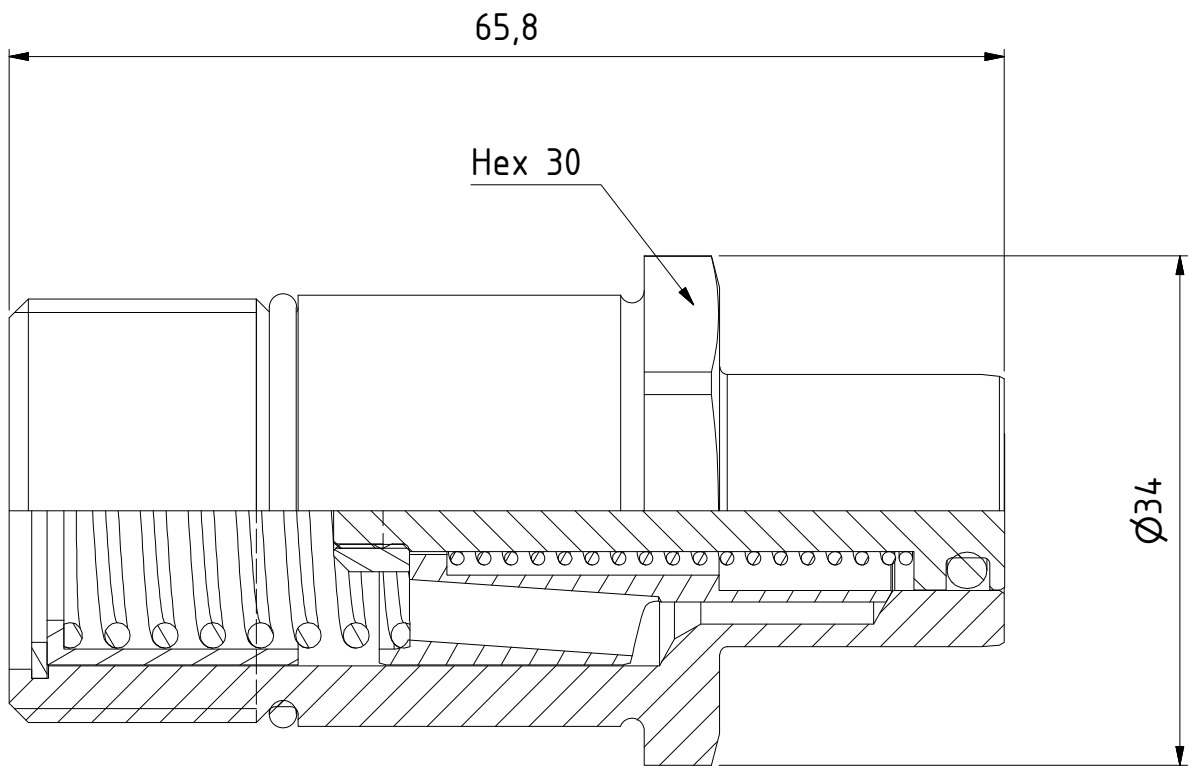

Product No. 109446554

Nominal flow $\varnothing$ DN: 8 mm
Connection Stroke: 18.8 mm
Max WP Connected: 35 bar
Max WP Disconnected: 35 bar
Min BP Connected: 140 bar
Min BP Disconnected: 140 bar
Temperature range: -30°C - +100°C
Connection: M28x1,5 Male
Sealing material: NBR
Hexagon: 30

10	1	Spring	Stainless steel	099443250
9	1	Spring	Stainless steel	099443251
8	1	O-ring	NBR	099442801
7	1	O-ring	NBR	099442800
6	1	Lock ring	Stainless steel	099442601
5	1	Nut	Brass	099440800
4	1	Valve sleeve	Brass	099445750
3	1	Stop for valve	Brass	099443950
2	1	Valve	Brass, CuNi5b	099443050
1	1	Nipple body	Brass, plated	099442450
Item	Qty	Description	Material	Part Number
		Scale	Drawn	Checked
		2 : 1	EP7	
Assembly Drawing		Drawing No.		Date
		509446554		2018-01-22
		Issue		Sheet
		AA		1 /(1)