
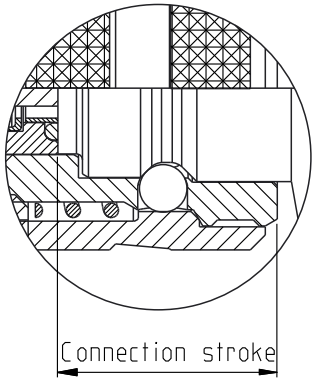


Product no: 10_945_1554		
Max working pressure:	300	bar connected
	300	bar disconnected
Min burst pressure:	970	bar connected
	970	bar disconnected
Sealing material:	NBR	
Temperatur range:	-20��C - +100 ��C	
Nominal flow diameter,DN:	8	mm
Connection	M28x1,5 Male	
Connection stroke:	18.8	mm

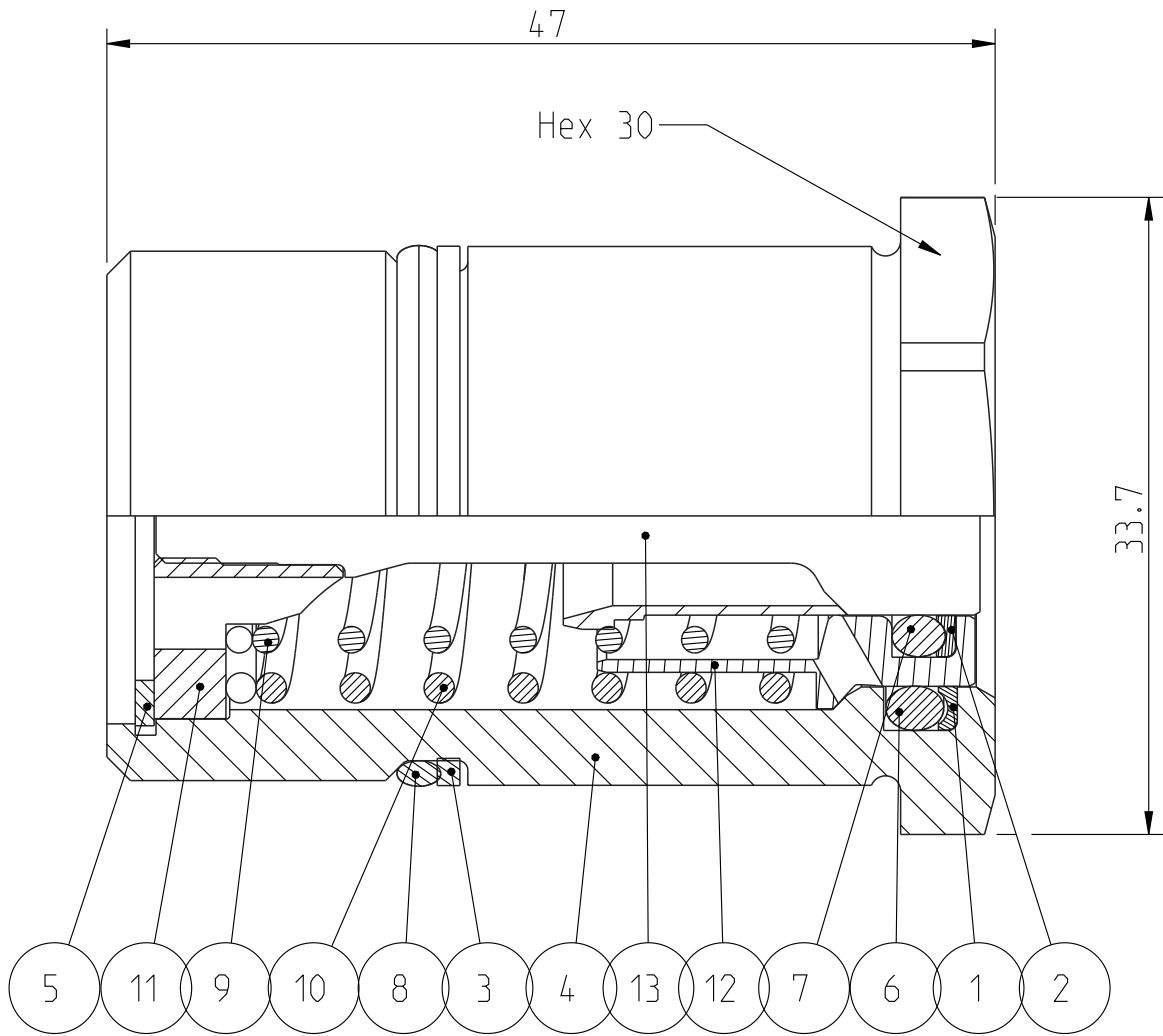

1:1

14	1	Valve sleeve	Steel
13	1	Valve opener	Steel, Corr-I-Dur
12	1	Valve	Steel, Black finished
11	1	Stop for valve	Steel
10	1	Spring	Steel
9	1	Spring	Stainless steel
8	1	O-ring	NBR
7	1	O-ring	NBR
6	1	O-ring	NBR
5	1	Lock ring	Steel, FeZn
4	1	Coupling body	Steel, Black finished
3	1	Back up ring	PUR
2	1	Back up ring	PTFE
1	1	Back up ring	PTFE
Detalj Item	Antal Quant.	Ben��mning Description	Material Material

	Skala Scale	5:2	Rit��d Drawn	ChP	Kontr. Checked	–	Godk. Appr.	–	��m nr. Alt. no.	–	Dat. Date	050608
	Assembly drawing		Ritning nr/Drawing No.				50_945_1554		Utg./Issue			A