

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D


C

B

A

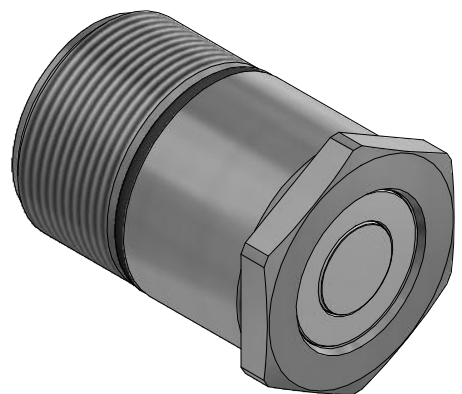

1 : 1

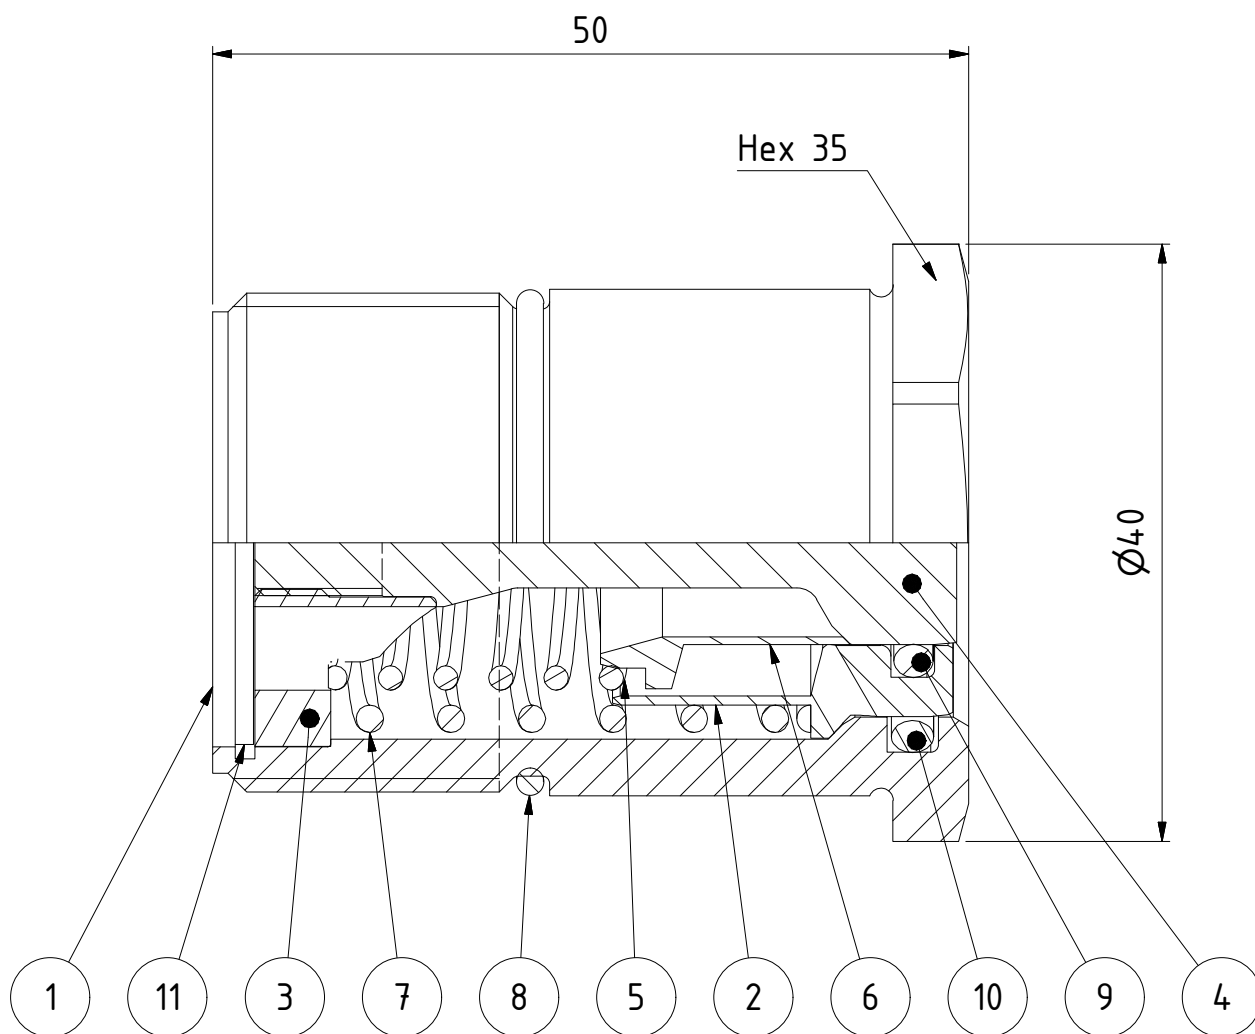

Product No. 109641556	
Nominal flow Ø DN:	11 mm
Connection Stroke:	18,8 mm
Max WP Connected:	35 bar
Max WP Disconnected:	35 bar
Min BP Connected:	140 bar
Min BP Disconnected:	140 bar
Temperature range:	-20°C - +100°C
Connection:	M33x1,5 Male
Sealing material:	NBR
Hexagon:	35

11	1	Retaining Ring SgH 27	Stainless, A2	099642600
10	1	O-ring	NBR	096162803
9	1	O-ring	NBR	096002800
8	1	O-ring	NBR	095552803
7	1	Spring	Stainless steel	099643200
6	1	Valve sleeve	Brass	099645700
5	1	Spring	Stainless steel	099643201
4	1	Valve opener	Brass, CuNi5b	099647000
3	1	Stop for valve	Brass	099643900
2	1	Valve	Brass, CuNi5b	099643000
1	1	Coupling body	Brass, CuNi5b	099645450
Item	Qty	Description	Material	Part Number
		Scale 2 : 1	Drawn EP7	Checked
		Appr.		ECO
		Date 2018-01-22		Issue
		Drawing No. 509641556		Sheet 1 /(1)
		AA		



Assembly Drawing 509641556