
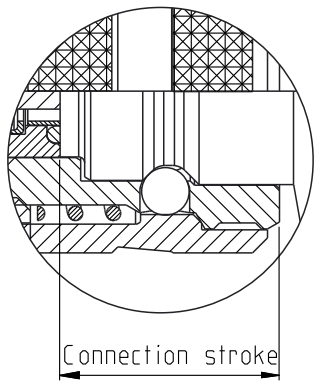


Product no: 10_975_1558		
Max working pressure:	300	bar connected
	300	bar disconnected
Min burst pressure:	970	bar connected
	970	bar disconnected
Sealing material:	NBR	
Temperatur range:	-20��C - +100 ��C	
Nominal flow diameter,DN:	15	mm
Connection	M45x1.5 Male	
Connection stroke:	20.5	mm

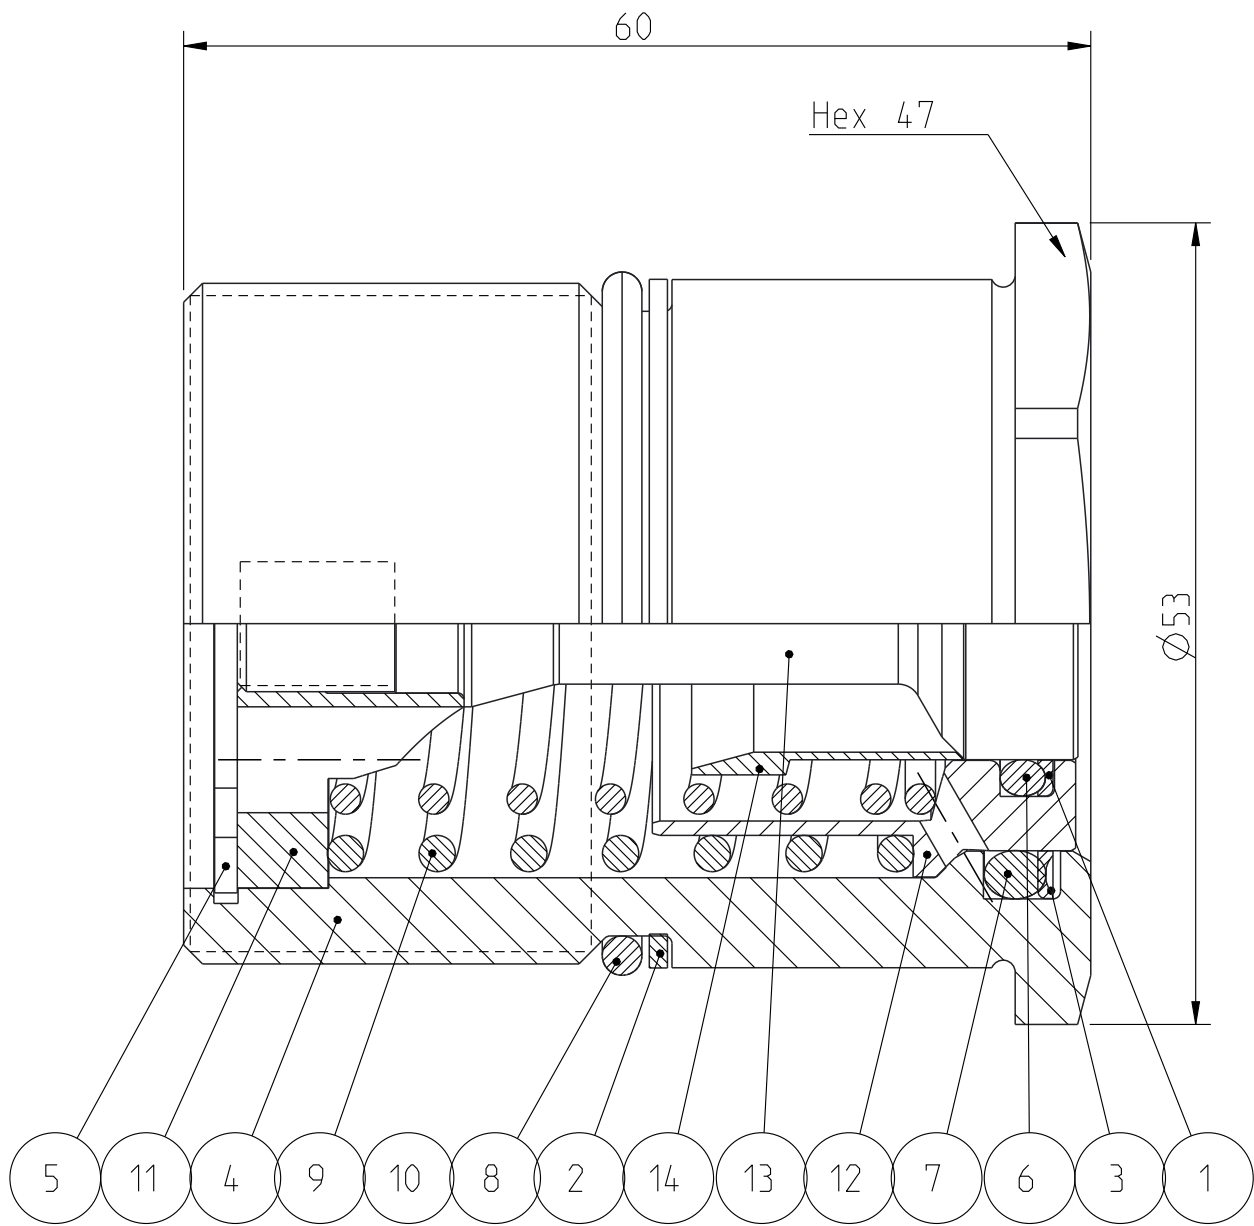

14	1	Valve sleeve	Steel
13	1	Valve opener	Hard. steel, Corr-I-Dur
12	1	Valve	Steel, Black finished
11	1	Stop for valve	Steel
10	1	Spring	Stainless steel
9	1	Spring	Stainless steel
8	1	O-ring	NBR
7	1	O-ring	NBR
6	1	O-ring	NBR
5	1	Lock ring	Steel
4	1	Coupling body	Steel, Black finished
3	1	Back-up ring	PTFE+Bronze
2	1	Back up ring	PUR
1	1	Back up ring	PTFE
Detalj Item	Antal Quant.	Ben��mning Description	Material Material

	Skala Scale	2:1	Rit��d Drawn	ChP	Kontr. Checked	–	Godk. Appr.	–	��m nr. Alt. no.	–	Dat. Date	110824
	Assembly drawing		Ritning nr/Drawing No.				50_975_1558		Utg./Issue			AB