
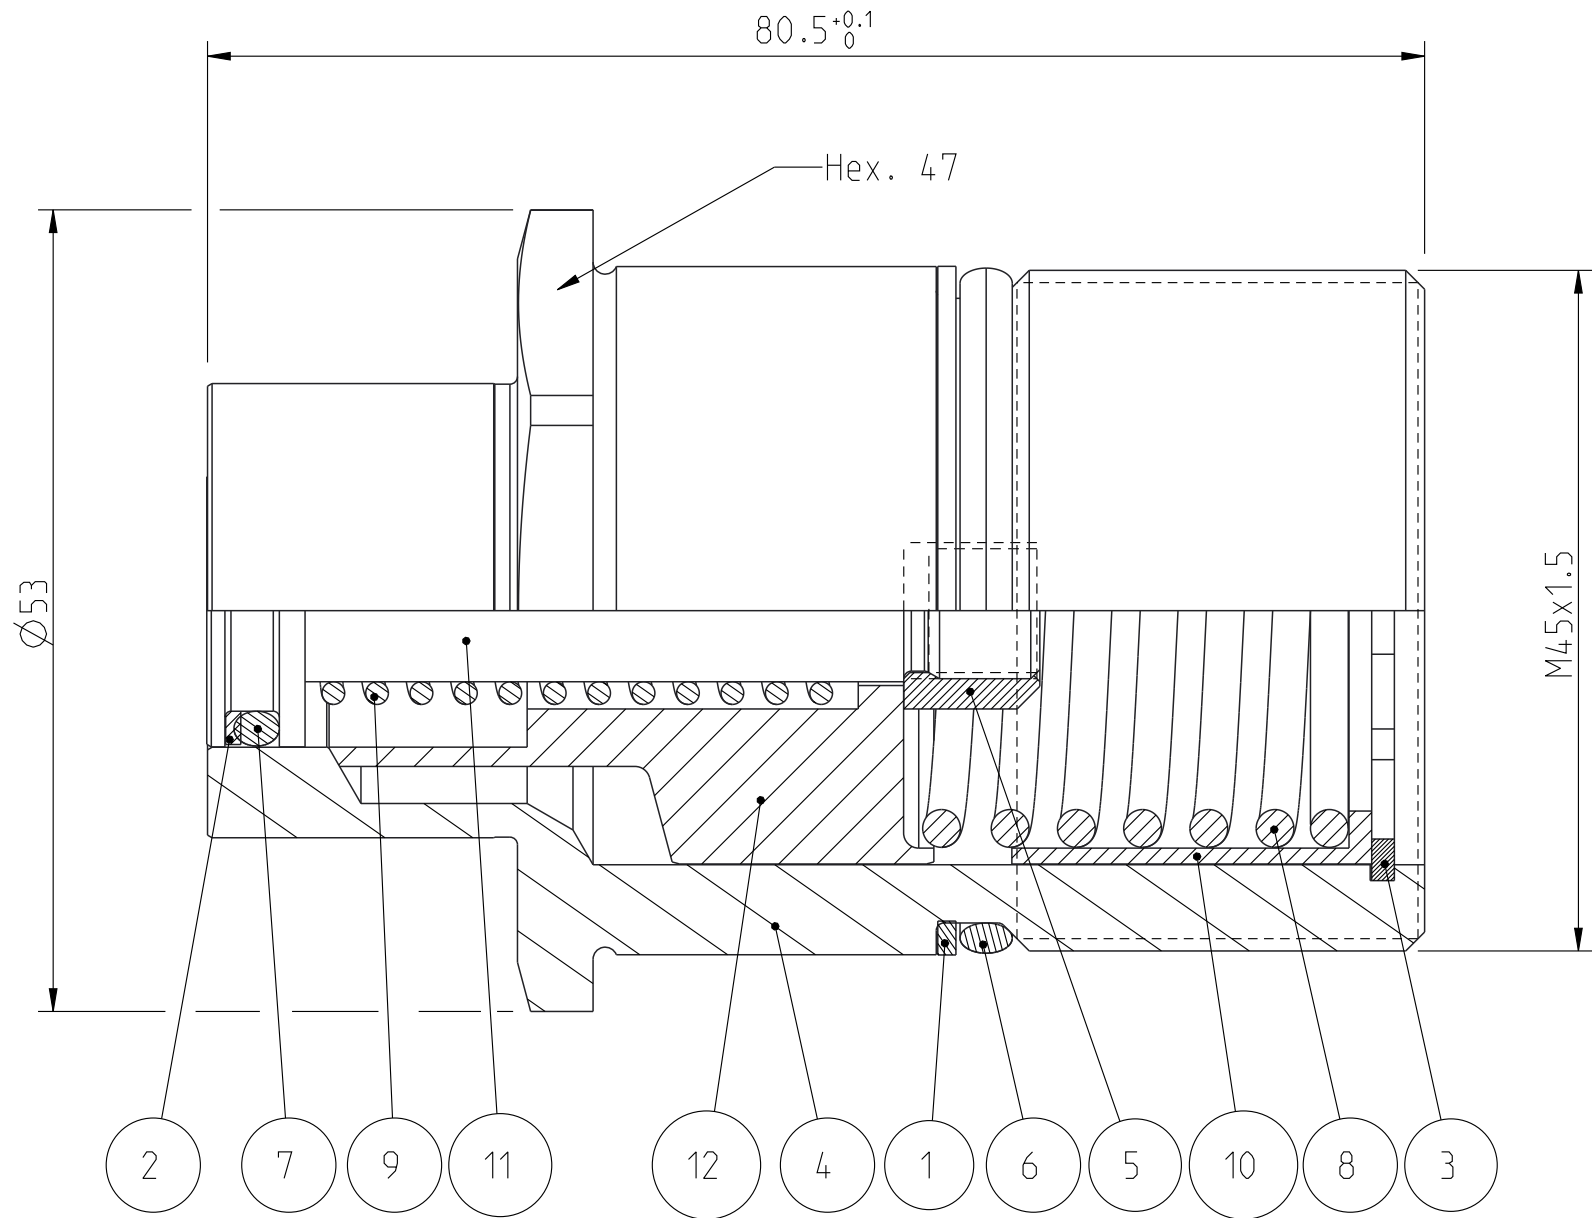


Alta rättigheter förbehålls.
All rights reserved.
Alle Rechte vorbehalten.

Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdrückliche Genehmigung kopiert oder auf andere Weise vervielfältigt werden.
werden. Zuwiderhandlungen werden gerichtlich verfolgt.

Denna handling får ej utan vårt medgivande delges annan, kopieras eller eljest obehörigen användas.
övertrycks eller på annat sätt kopieras eller på annat sätt användas.
This document must not be copied, either completely or in part, without permission.
Any infringement will have legal consequences.



1:1

Product no: 10_975_6558		
Max working pressure:	300	bar connected
	300	bar disconnected
Min burst pressure:	970	bar connected
	970	bar disconnected
Sealing material:	NBR	
Temperatur range:	-20°C - +100 °C	
Nominal flow diameter,DN:	15	mm
Connection	M45x1.5	
Connection stroke:	-	mm

12	1	Valve sleeve	Steel
11	1	Valve	Steel, Black finished
10	1	Stop for valve	Steel
9	1	Spring	Stainless steel
8	1	Spring	Stainless steel
7	1	O-ring	NBR
6	1	O-ring	NBR
5	1	Nut	Steel
4	1	Nipple body	Steel, Black finished
3	1	Lock ring	Steel
2	1	Back-up	PTSM
1	1	Back up ring	PUR
Detalj Item	Antal Quant.	Benämning Description	Material Material



	Skala Scale	2:1	Ritad Drawn	PGU	Kontr. Checked	-	Godk. Appr.	-	Äm nr. Alt. no.	10788	Dat. Date	140414
	Assembly drawing							Ritning nr/Drawing No. 50_975_6558			Utg./Issue AC	