
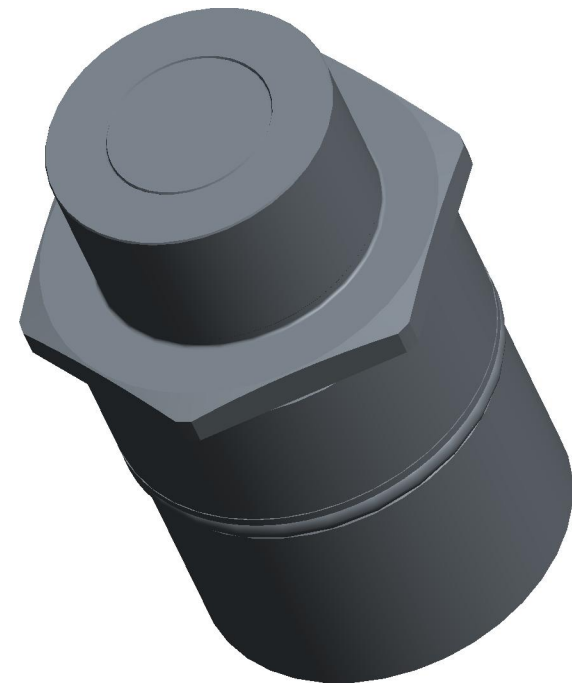
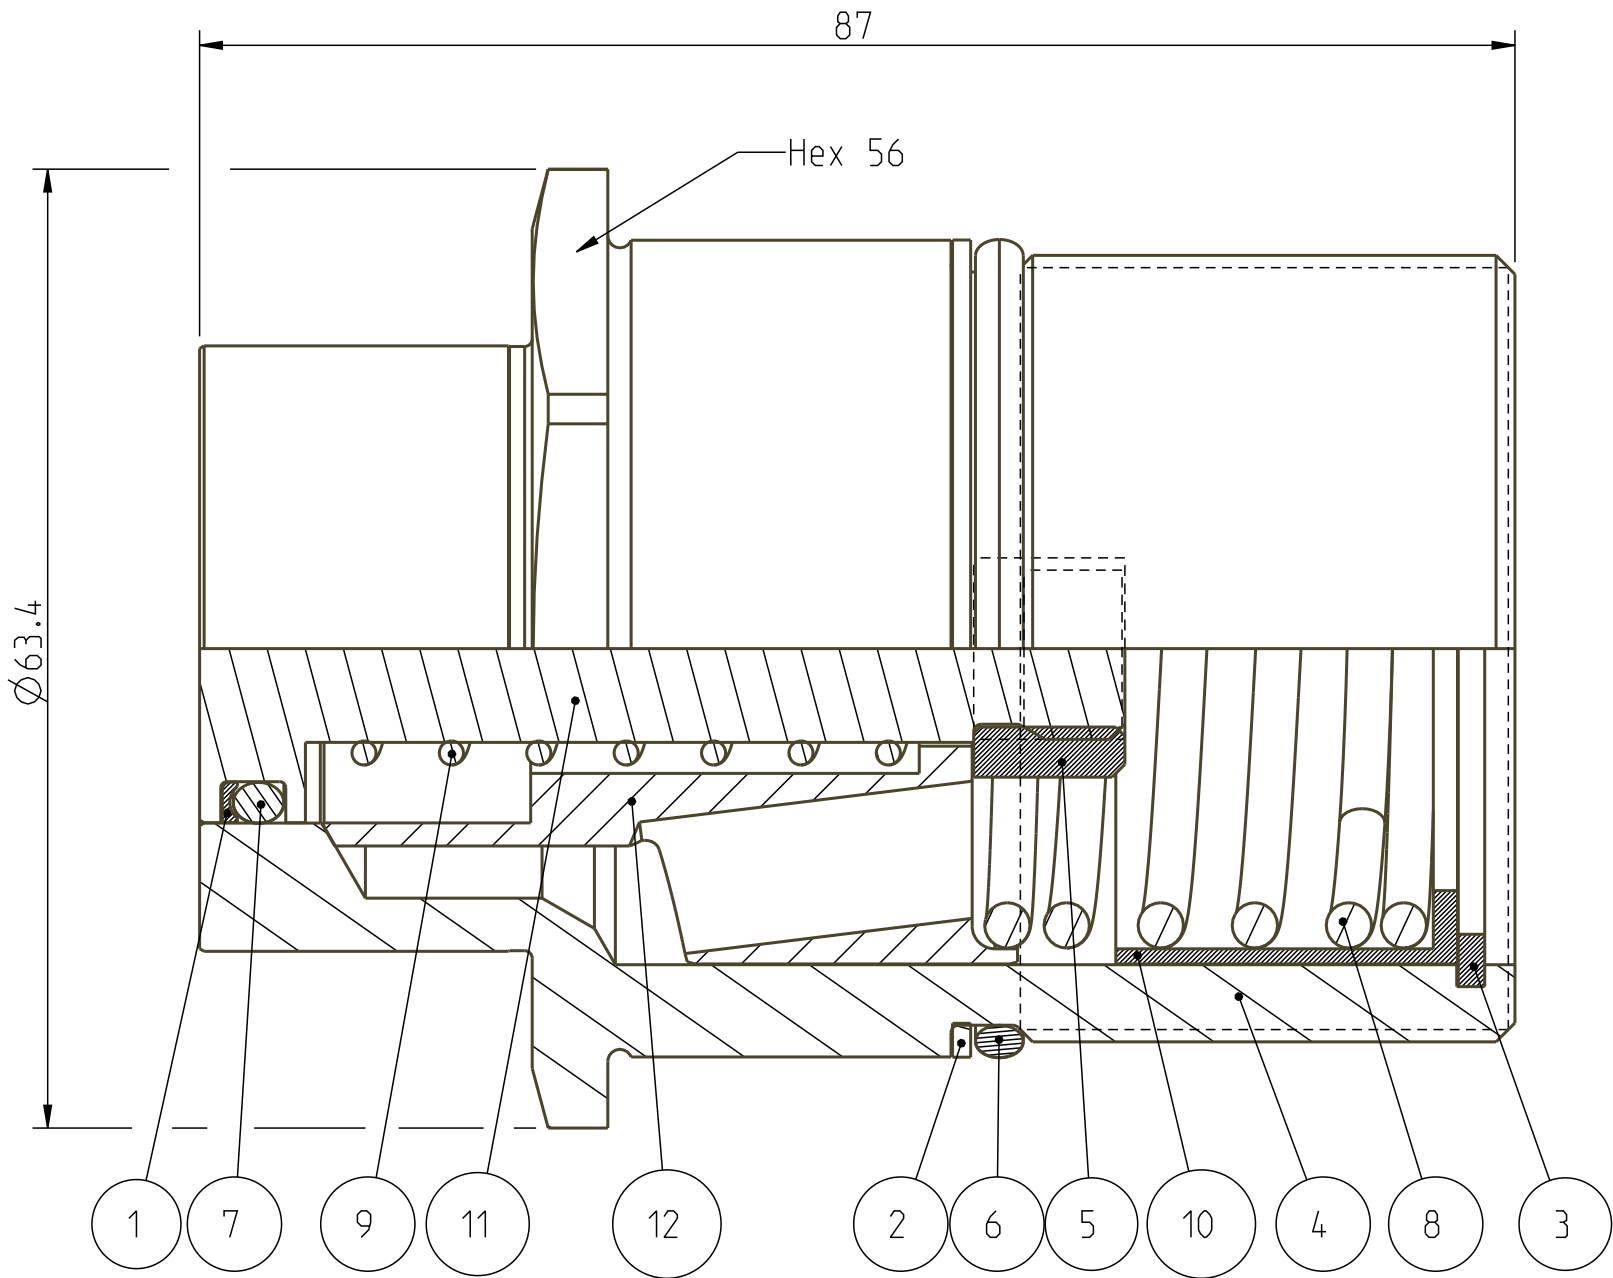


Denna handling för ej utan vårt medgivande delges annan. Kopieras eller eljest obehörigen användas.  
Överträdelse härvid beivras med stöd av gällande lag.  
This document must not be copied, either completely or in part, without permission.  
Any infringement will have legal consequences.

Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdrückliche Genehmigung kopiert oder auf andere Weise vervielfältigt werden.  
Genehmigung kopiert oder auf andere Weise vervielfältigt werden.  
werden. Zuwiderhandlungen werden gerichtlich verfolgt.  
Alle r  tigketer f  rbeh  lts.  
All rights reserved.  
Alle rechte vorbehalten.



1:1

|                           |                 |                  |
|---------------------------|-----------------|------------------|
| Product no: 10_985_6559   |                 |                  |
| Max working pressure:     | 300             | bar connected    |
|                           | 300             | bar disconnected |
| Min burst pressure:       | 970             | bar connected    |
|                           | 970             | bar disconnected |
| Sealing material:         | NBR             |                  |
| Temperatur range:         | -20 C - +100  C |                  |
| Nominal flow diameter,DN: | 19              | mm               |
| Connection                | M52*1,5 Male    |                  |
| Connection stroke:        | -               | mm               |

|                |                 |                           |                       |
|----------------|-----------------|---------------------------|-----------------------|
| 12             | 1               | Valve sleeve              | Steel                 |
| 11             | 1               | Valve                     | Steel, Black finished |
| 10             | 1               | Stop for valve            | Steel                 |
| 9              | 1               | Spring                    | Steel                 |
| 8              | 1               | Spring                    | Steel                 |
| 7              | 1               | O-ring                    | NBR                   |
| 6              | 1               | O-ring                    | NBR                   |
| 5              | 1               | Nut                       | Steel                 |
| 4              | 1               | Nipple body               | Stainless steel       |
| 3              | 1               | Lock ring                 | Steel                 |
| 2              | 1               | Back up ring              | PUR                   |
| 1              | 1               | Back up ring              | PTFE                  |
| Detalj<br>Item | Antal<br>Quant. | Ben  mning<br>Description | Material<br>Material  |

|  |                  |     |                           |        |                         |   |                   |   |                     |   |              |        |
|--|------------------|-----|---------------------------|--------|-------------------------|---|-------------------|---|---------------------|---|--------------|--------|
|  | Skala<br>Scale   | 2:1 | Rit  d<br>Drawn           | CABJAJ | Kontroll  rt<br>Checked | - | Godk  rt<br>Appr. | - |   r nr.<br>Alt. no. | - | Dat.<br>Date | 130424 |
|  | Assembly drawing |     | Rit  ning nr./Drawing No. |        |                         |   | 50_985_6559       |   | Utg./Issue          |   |              | AA     |