

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B

A

D



C

B

A



1 : 2

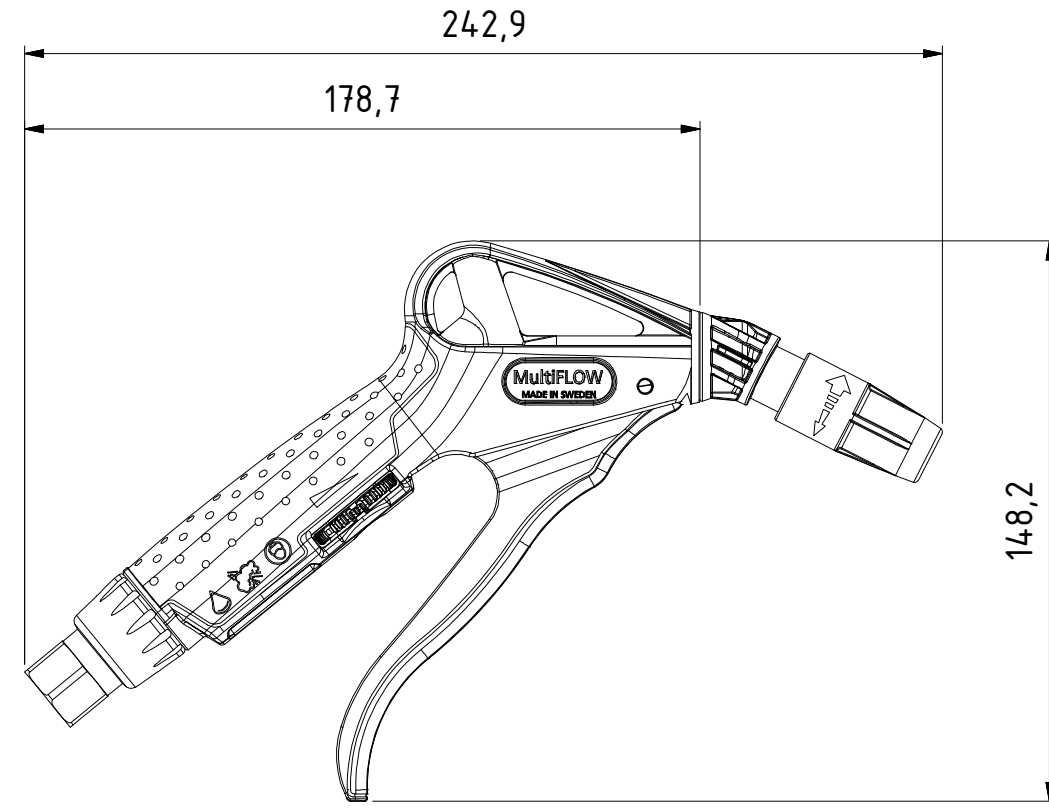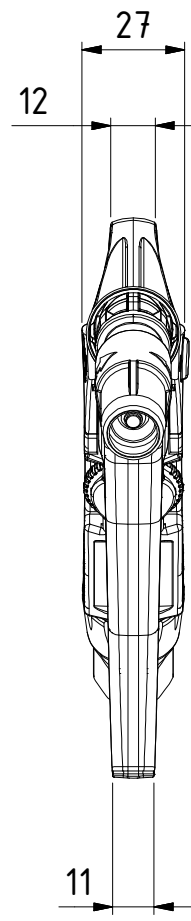

24	1	Spring	Stainless steel
23	1	Nozzle sleeve	Plastic
22	1	O-ring	FPM
21	1	Valve	Aluminium
20	1	O-ring	NBR
19	1	Nozzle thread	Brass, plated
18	1	Nozzle	Aluminium
17	1	Nozzle adapter	Plastic
16	1	Adapter	Brass, Plated
15	1	Guide bushing	Plastic
14	1	O-ring	NBR
13	1	O-ring	NBR
12	1	Lip seal	NBR
11	1	Valve	Plastic
10	1	O-ring	NBR
9	1	Label	Plastic
8	1	Spring	Stainless steel
7	1	O-ring	NBR
6	1	Screw	Steel
5	1	Wheel	Plastic
4	1	Spacer	Plastic
3	1	Valve ball	Plastic
2	1	Handle	Plastic
1	1	Body	Plastic
Item	Qty	Description	Material

Product No.	112100352
Nominal flow Ø DN:	mm
Connection Stroke:	mm
Max WP Connected:	16 bar
Min BP Connected:	64 bar
Temperature range:	-20°C- +60°C@16 bar WP,+80°C@10 bar WP
Connection:	G 1/4" female
Sealing material:	NBR/FPM
Hexagon:	

Scale
1 : 2

Drawn
CABANLA

Checked
CABLHE

Appr.
CABJOOL

ECO

Date
2017-11-10

Assembly Drawing 502100352

Issue
AA

Sheet
1 /(1)