

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B

A

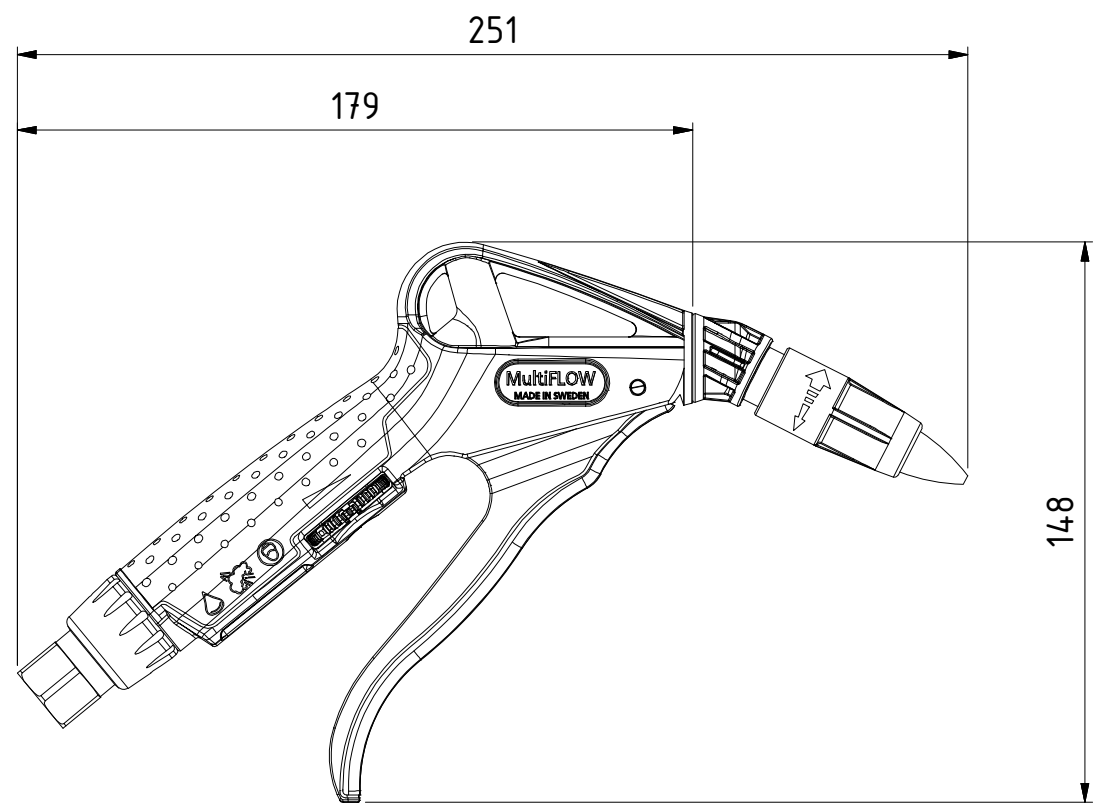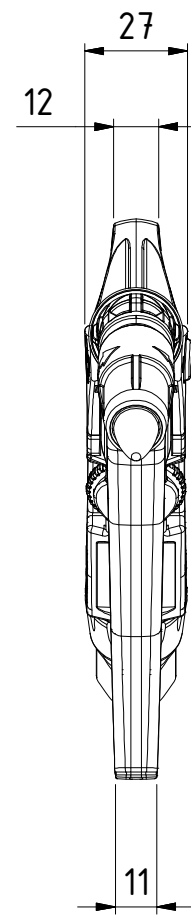

21	1	Adapter	Brass, Plated
20	1	Guide bushing	Plastic
19	1	O-ring	NBR
18	1	O-ring	NBR
17	1	Lip seal	NBR
16	1	Valve	Plastic
15	1	O-ring	NBR
14	1	Nozzle thread	Brass, plated
13	1	Nozzle sleeve	Plastic
12	1	Nozzle	Aluminium
11	1	Nozzle adapter	Plastic
10	1	O-ring	NBR
9	1	Label	Plastic
8	1	Spring	Stainless steel
7	1	O-ring	NBR
6	1	Screw	Steel
5	1	Wheel	Plastic
4	1	Spacer	Plastic
3	1	Valve ball	Plastic
2	1	Handle	Plastic
1	1	Body	Plastic
Item	Qty	Description	Material

Product No.	112100452
Nominal flow Ø DN:	mm
Connection Stroke:	mm
Max WP Connected:	16 bar
Min BP Connected:	64 bar
Temperature range:	-20°C - +60°C@16 bar WP,+80°C@10 bar WP
Connection:	G 1/4" female
Sealing material:	NBR
Hexagon:	



Scale

1 : 2

Drawn

CABANLA

Checked

CABLHE

Appr.

CABJOOL

ECO

Date

2017-11-15

Drawing No.

502100452

Issue

AB

Sheet

1 /(1)

Assembly Drawing

502100452