


1 : 1

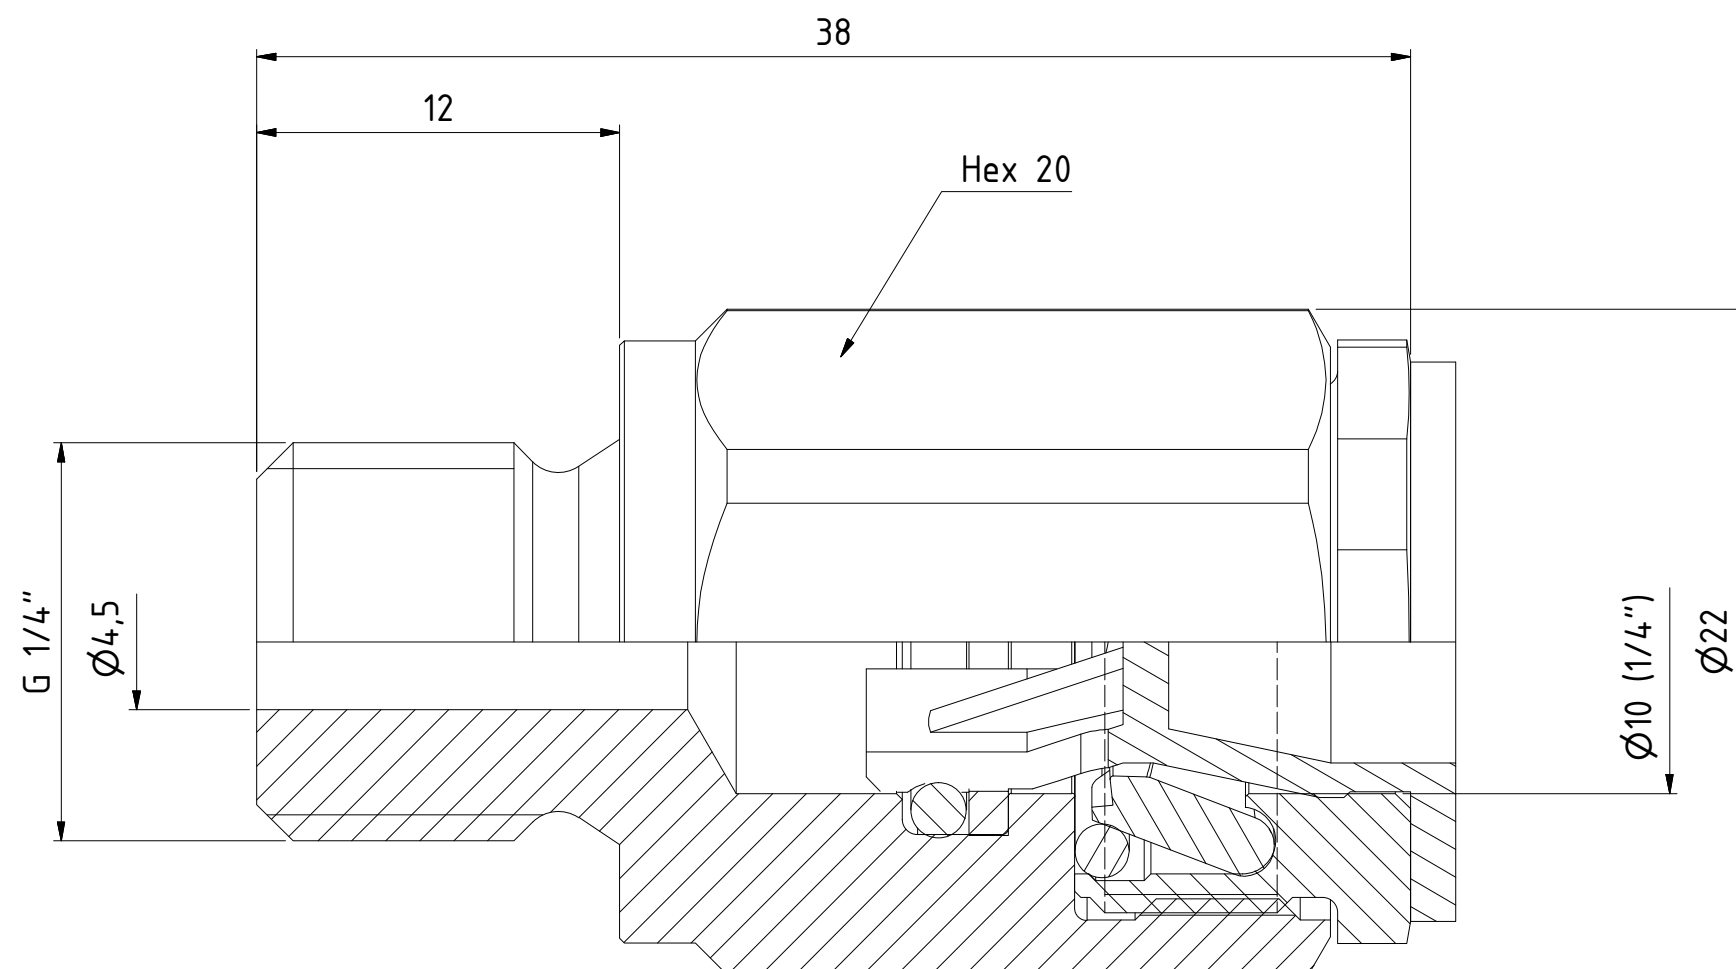

|                      |                |
|----------------------|----------------|
| Product No.          | 148100404      |
| Nominal flow Ø DN:   | 4.5 mm         |
| Connection Stroke:   | mm             |
| Max WP Connected:    | 350 bar        |
| Max WP Disconnected: | bar            |
| Min BP Connected:    | 1400 bar       |
| Min BP Disconnected: | bar            |
| Temperature range:   | -30°C - +100°C |
| Connection:          | G 1/4" Male    |
| Sealing material:    | NBR            |
| Hexagon:             |                |

|      |     |                 |                    |
|------|-----|-----------------|--------------------|
| 5    | 1   | Back-up ring    | Hytrell            |
| 4    | 1   | O-ring          | NBR                |
| 3.3  | 1   | O-ring          | NBR                |
| 3.2  | 4   | Locking hook    | Hard.steel, Plated |
| 3.1  | 1   | Front part      | Steel, Zn 8 Silver |
| 2    | 1   | Protection plug | LDPE               |
| 1    | 1   | Back part       | Steel, Zn 8 silver |
| Item | Qty | Description     | Material           |

|                         |                     |                        |                                 |                     |                           |
|-------------------------|---------------------|------------------------|---------------------------------|---------------------|---------------------------|
| Scale<br><b>4 : 1</b>   | Drawn<br><b>EP7</b> | Checked<br><b>PEOD</b> | Appr.<br><b>PMB</b>             | ECO<br><b>11982</b> | Date<br><b>2018-05-16</b> |
| <b>Assembly Drawing</b> |                     |                        | Drawing No.<br><b>508100404</b> |                     | Issue<br><b>AD</b>        |
|                         |                     |                        |                                 |                     | Sheet<br><b>1 / (1)</b>   |

