

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©





A3

D

C

B

A

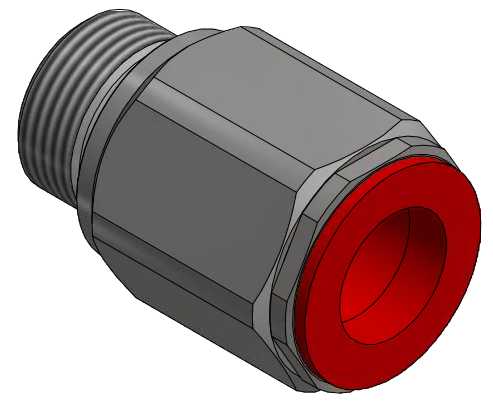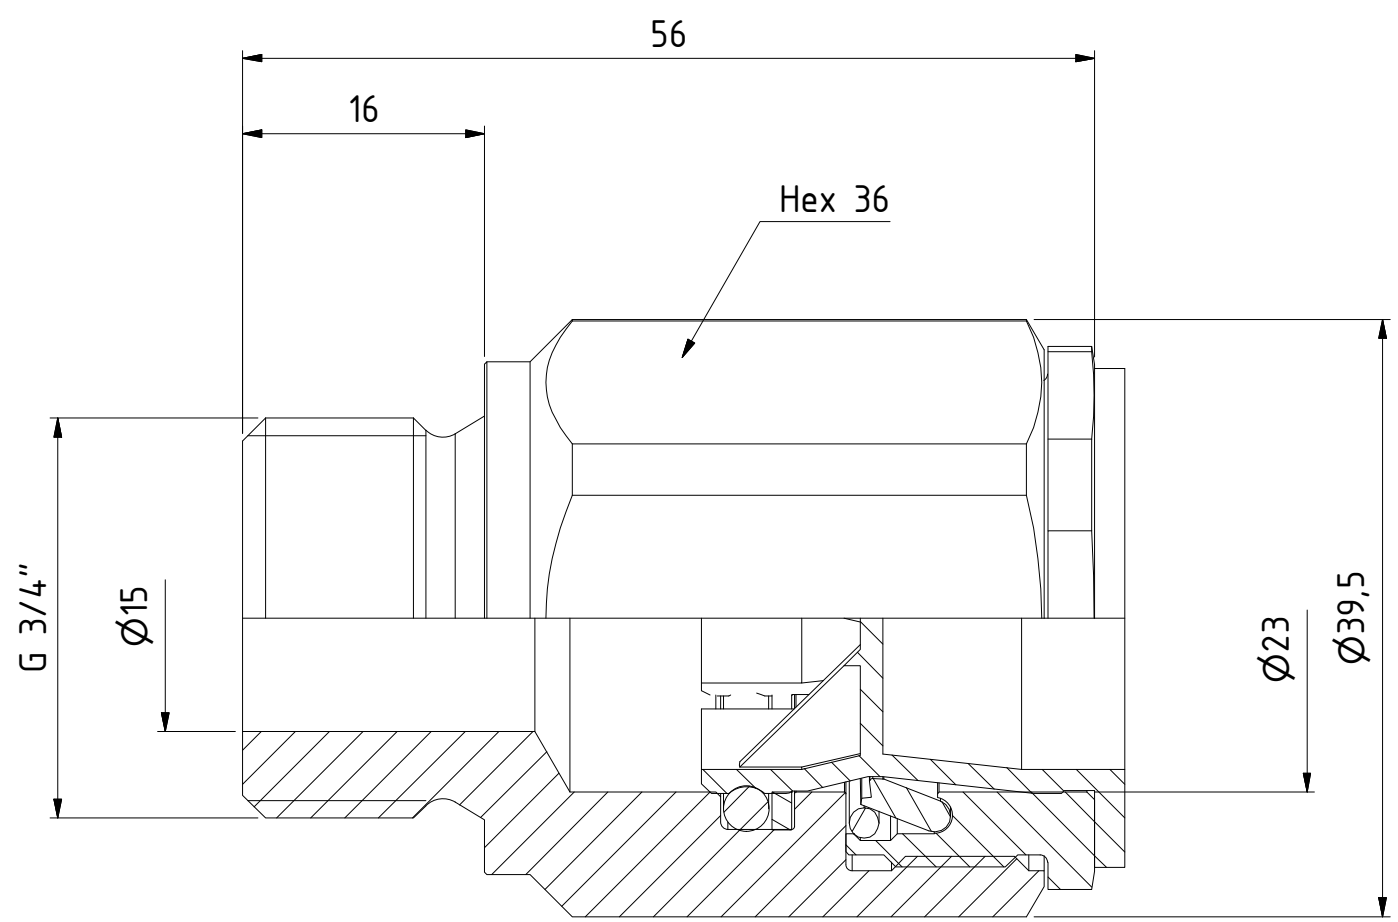

1 : 1

D

C

B

A

Product No. 148101212	
Nominal flow Ø DN:	15.0 mm
Connection Stroke:	mm
Max WP Connected:	350 bar
Max WP Disconnected:	bar
Min BP Connected:	1400 bar
Min BP Disconnected:	bar
Temperature range:	-30°C - +100°C
Connection:	G 3/4" Male
Sealing material:	NBR
Hexagon:	

5.3	1	O Ring	NBR
5.2	5	Locking Hook	Steel, Plated
5.1	1	Front part	Steel, Zn 8 Silver
4	1	Protection plug	LDPE
3	1	O-ring	NBR
2	1	Back up ring	Hytrel
1	1	Back Part	Steel, Plated
Item	Qty	Description	Material

	Scale	Drawn	Checked	Appr.	ECO	Date		
	2 : 1	EP7	PEOD	PMB	11982	2018-05-17		
	Assembly Drawing				Drawing No.		Issue	Sheet
	508101212						AC	1 /(1)

6

5

4

3

2

1