




Dessa r  tigheter f  rbeh  lls.
All rights reserved.
Alle Rechte vorbehalten.

Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdr  ckliche
Genehmigung kopiert oder auf andere Weise verv  ltlicht werden.
werden. Zuwiderhandlungen werden gerichtlich verfolgt.

Denna handling f  r ej utan v  t medgivande delges aman. kopieras eller eljest obeh  rigen anv  ndas.
  vertr  delse h  rvid beivras med st  d av g  llande lag.
This document must not be copied, either completely or in part, without permission.
Any infringement will have legal consequences.



A3

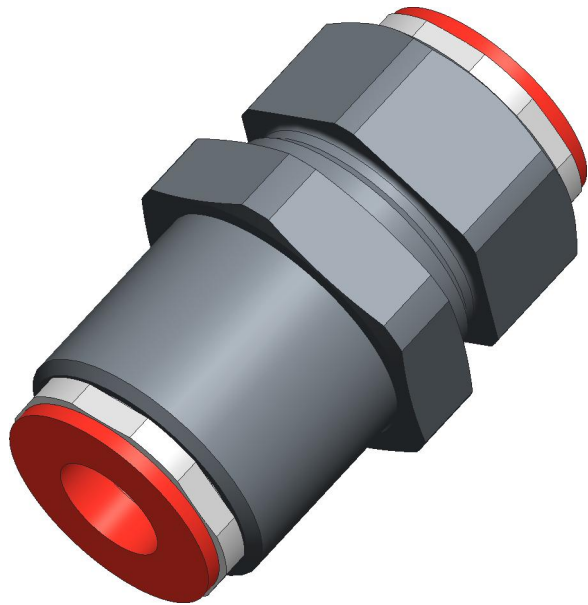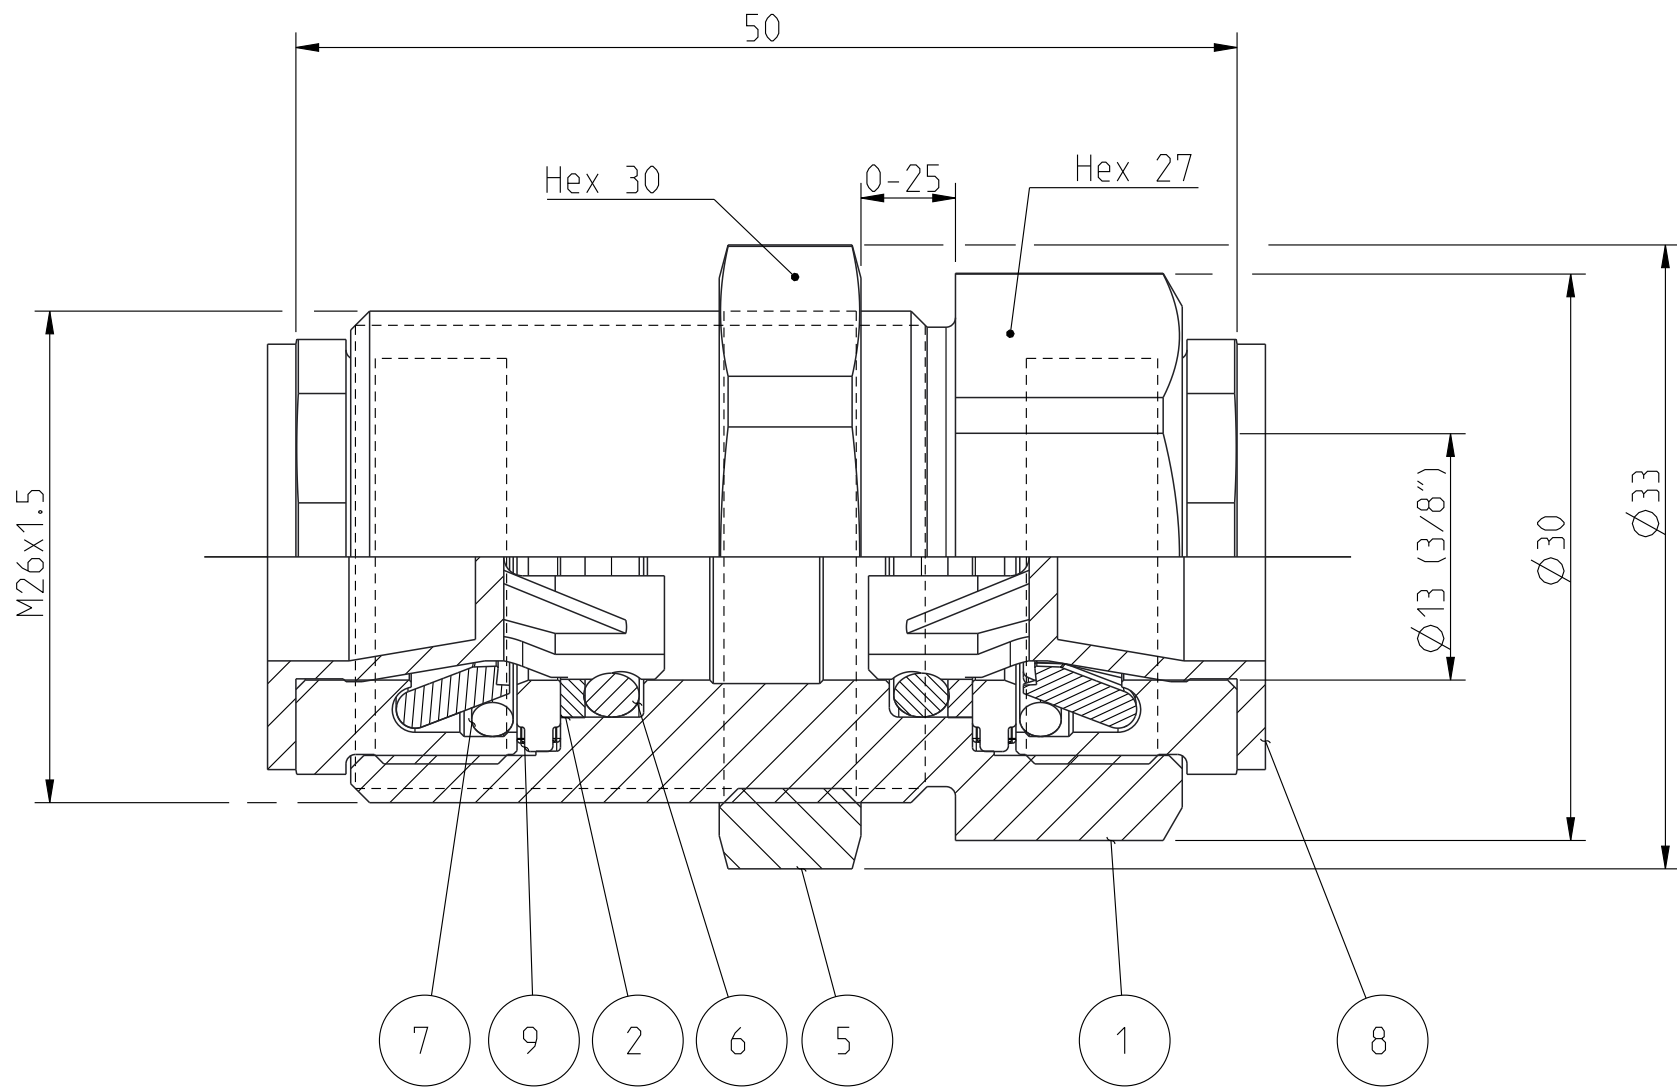

3:2

Product no: 14_813_0646		
Max working pressure:	350	bar connected bar disconnected
Min burst pressure:	1400	bar connected - bar disconnected
Sealing material:	NBR	
Temperatur range:	-30��C - +100 ��C	
Nominal flow diameter,DN:	13	mm
Connection	M26x1,5	
Connection stroke:	mm	

9	2	Washer	Steel, Plated
8	2	Protection plug	LDPE
7	2	O-ring	NBR
6	2	O-ring	NBR
5	1	Nut	Steel, Fe/Zn 8 P1 T/N
4	10	Locking hook	Hard.steel, Plated
3	2	Front part	Steel, Plated
2	2	Back-up ring	Hytrel
1	1	Back part	Steel, Fe/Zn 8 P1 N
Detalj Item	Antal Quant.	Ben��mning Description	Material Material



Skala Scale	5:2	Rit��d Drawn	CABPEOD	Kontr. Checked	MBa	Godk. Appr.	PMB	��m nr. Alt. no.	-	Dat. Date	13-03-08
Assembly drawing								Ritning nr/Drawing No.		Utg./Issue	
50_813_0646								AD			