

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B



A

D

C

B

A

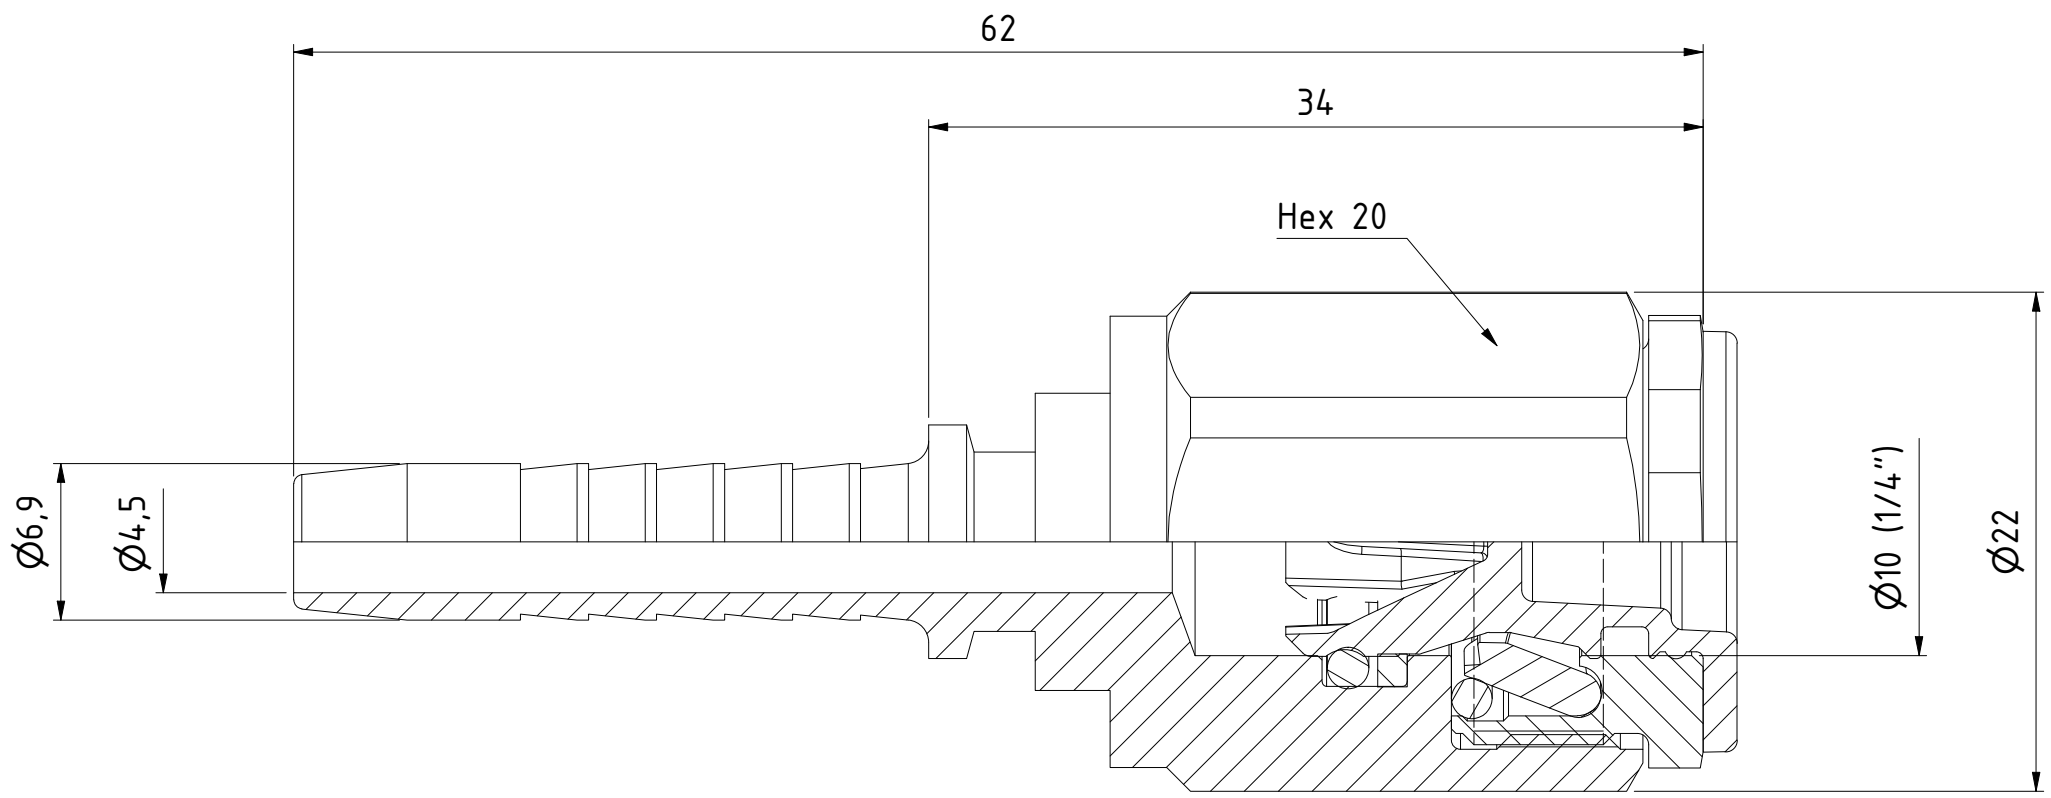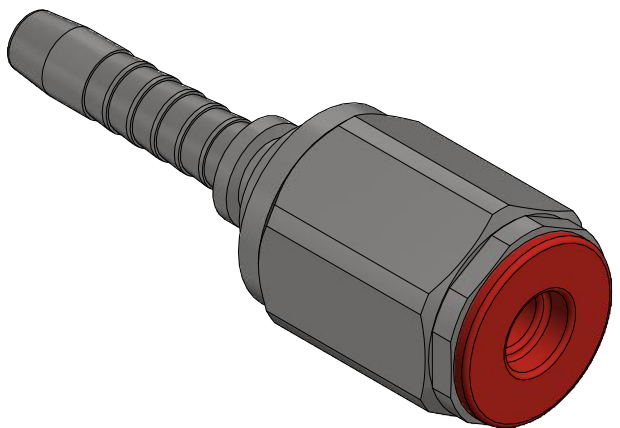

Product No. 148170404	
Nominal flow Ø DN:	4.5 mm
Connection Stroke:	mm
Max WP Connected:	350 bar
Max WP Disconnected:	bar
Min BP Connected:	1400 bar
Min BP Disconnected:	bar
Temperature range:	-30°C - +100°C
Connection:	Hose 1/4" 6.9 mm
Sealing material:	NBR
Hexagon:	

5.3	1	O-ring	NBR	095122801
5.2	4	Locking hook	Hard.steel, Plated	095146824
5.1	1	Front part	Steel, Zn 8 Silver	095122004
5	1	Semi assembly		095129010
4	1	Back-up ring	Hytrol	095125600
3	1	Protection plug	LDPE	095121010
2	1	O-ring	NBR	095122804
1	1	Back part	Steel	095129202
Item	Qty	Description	Material	Part Number
		Scale 3 : 1	Drawn CABJOER	Checked
		Appr. PMB		ECO 000874
		Date 2021-03-10		Issue AD
		Sheet 1 /(1)		



Assembly Drawing 508170404