

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B


A

D


C

B

A



1 : 1

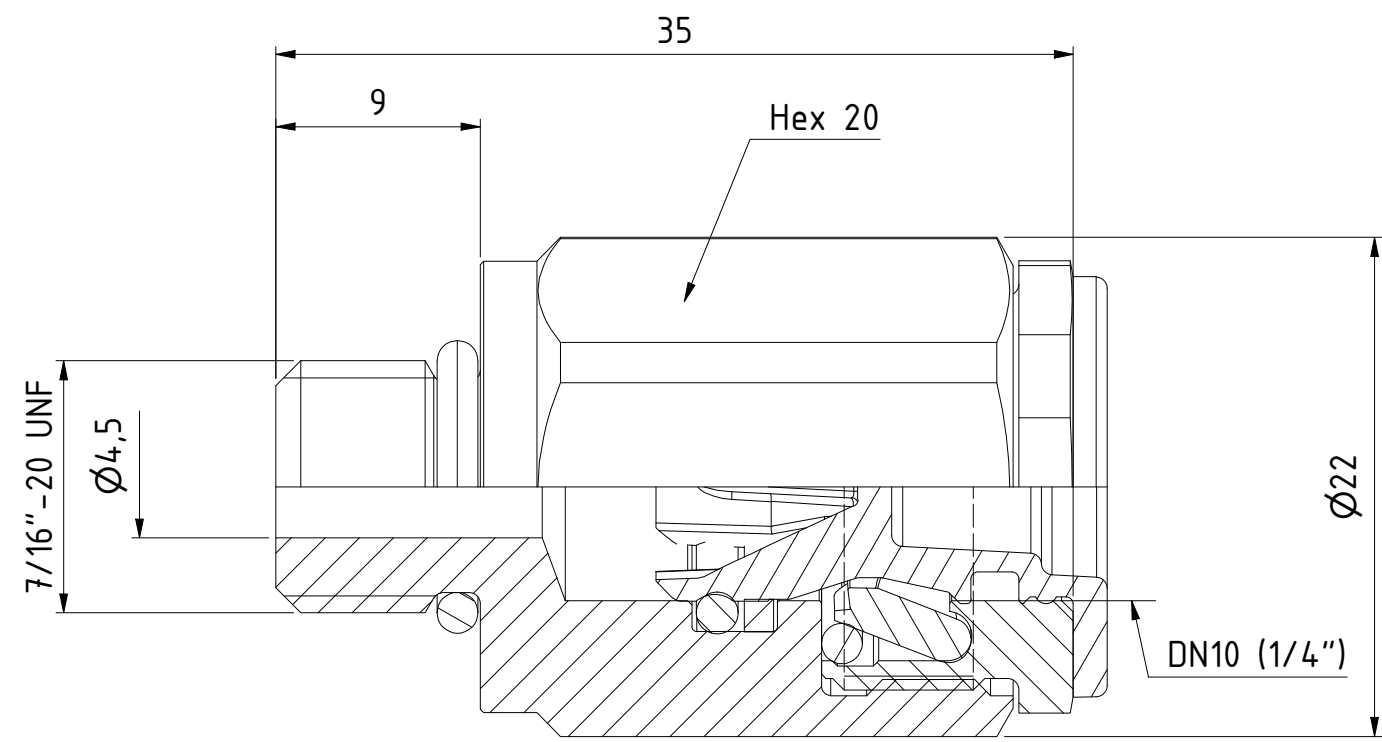

Product No. 148260407	
Nominal flow Ø DN:	4,5 mm
Connection Stroke:	mm
Max WP Connected:	350 bar
Max WP Disconnected:	bar
Min BP Connected:	1400 bar
Min BP Disconnected:	bar
Temperature range:	-30°C - +100°C
Connection:	7/16" -20 UNF Male
Sealing material:	NBR
Hexagon:	20

8	1	O-ring	NBR	095122801
7	4	Locking hook	Hard.steel, Plated	095146824
6	1	Front part DN06	Steel, Zn 8 Silver	095122004
5	1	Back part	Steel, Plated	095129462
4	1	Protection plug	LDPE	095121010
3	1	O-ring 9.3x1.83	NBR	095122804
2	1	Back-up ring	Hytrel	095125600
1	1	O-ring	NBR	093582806
Item	Qty	Description	Material	Part Number
		Scale 3 : 1	Drawn EP7	Checked JoEr
		Appr. PMB	ECO 12090	Date 2018-05-21
Assembly Drawing 148260407				Drawing No. 148260407
				Issue D
				Sheet 1 /(1)