

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B



A

D

C

B

A

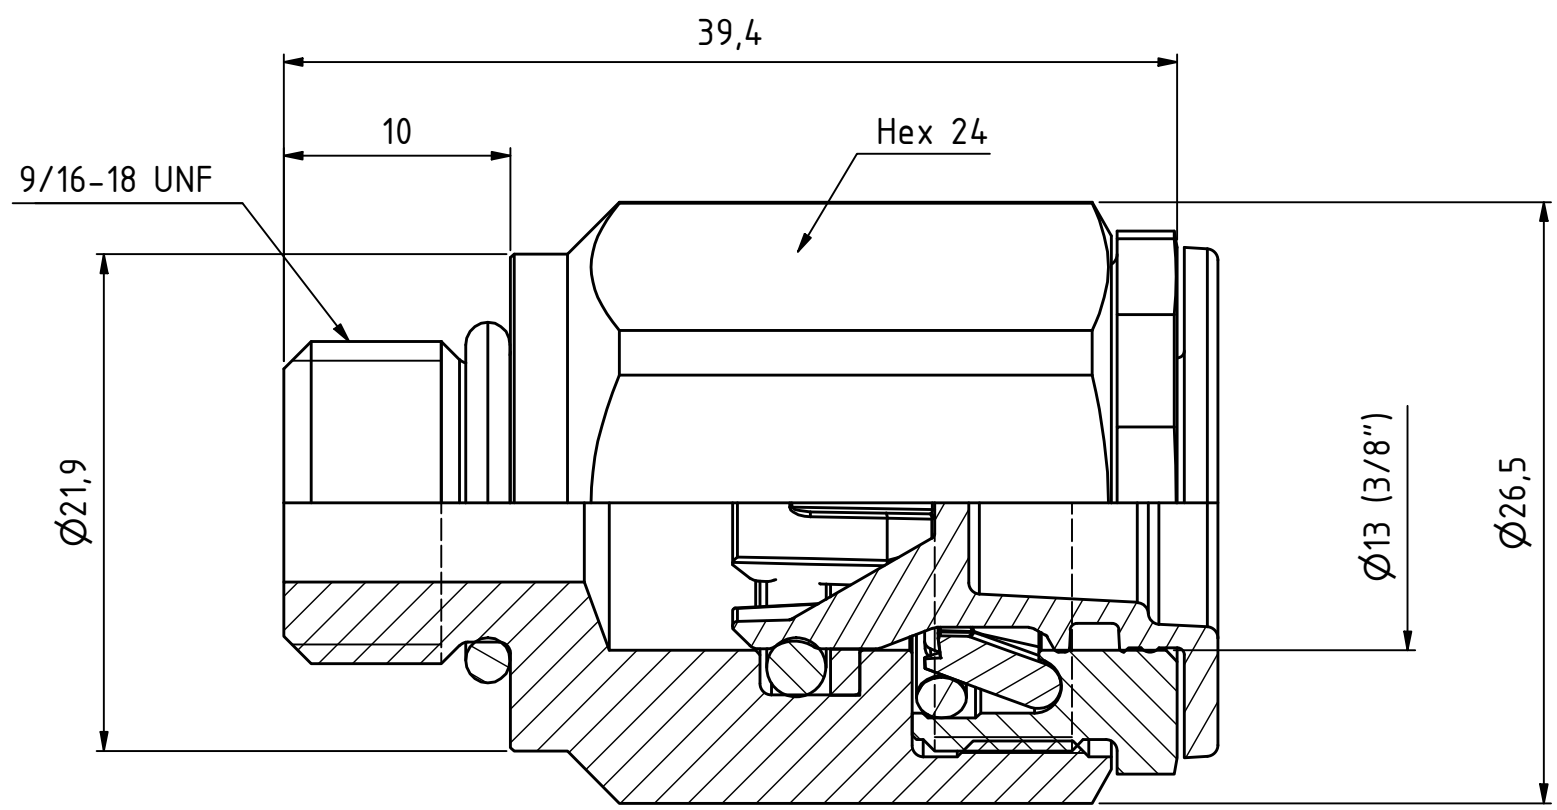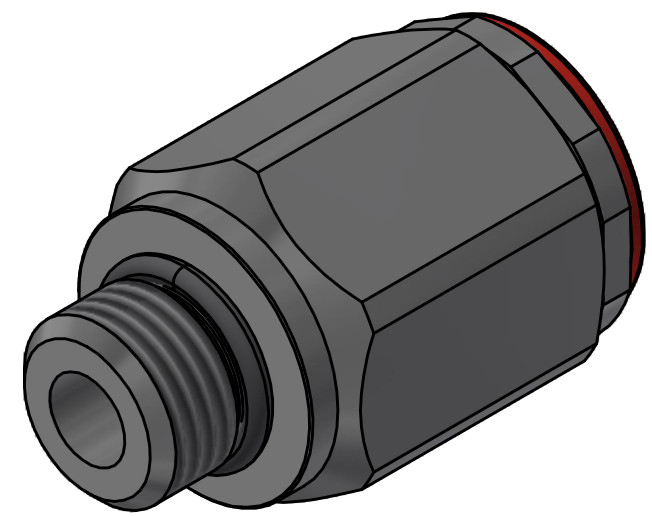

Product No. 148260609	
Nominal flow Ø DN:	7.0 mm
Connection Stroke:	mm
Max WP Connected:	350 bar
Max WP Disconnected:	bar
Min BP Connected:	1400 bar
Min BP Disconnected:	bar
Temperature range:	-30°C - +100°C
Connection:	9/16" - 18 UNF Male
Sealing material:	NBR
Hexagon:	24

6.3	1	O-ring	NBR	095142802
6.2	1	Front part DN10	Steel, Plated	095142007
6.1	5	Locking hook	Hard.steel, Plated	095146824
6	1	Semi assembly DN10	NBR	095149010
5	1	Protection plug	LDPE	095141010
4	1	O-ring	NBR	094142801
3	1	Back-up ring	Hytrel	095145602
2	1	Back part	Steel, Zn-Plated	095149464
1	1	O-ring	NBR	093582804
Item	Qty	Description	Material	Part Number
		Scale 3 : 1	Drawn CABJOER	Checked
		Appr.	ECO 000657	Date 2020-09-28
Assembly Drawing 508260609				Drawing No.
				Issue AD
				Sheet 1 /(1)