


Alla rättigheter förbehålls.
 All rights reserved.
 Alle Rechte vorbehalten.

Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdrückliche Genehmigung kopiert oder auf andere Weise vervielfältigt werden.

Denna handling får ej utan vårt medgivande delges annan, kopieras eller eljest obehörigen användas.
 Överlåtelse härvid beivras med stöd av gällande lag.
 This document must not be copied, either completely or in part, without permission.
 Any infringement will have legal consequences.

Product no: 14_826_1217		
Max working pressure:	350	bar connected bar disconnected
Min burst pressure:	1400	bar connected bar disconnected
Sealing material:	NBR	
Temperatur range:	-30°C - +100 °C	
Nominal flow diameter,DN:	15,0	mm
Connection	1 1/16" - 12 UN Male	
Connection stroke:	mm	

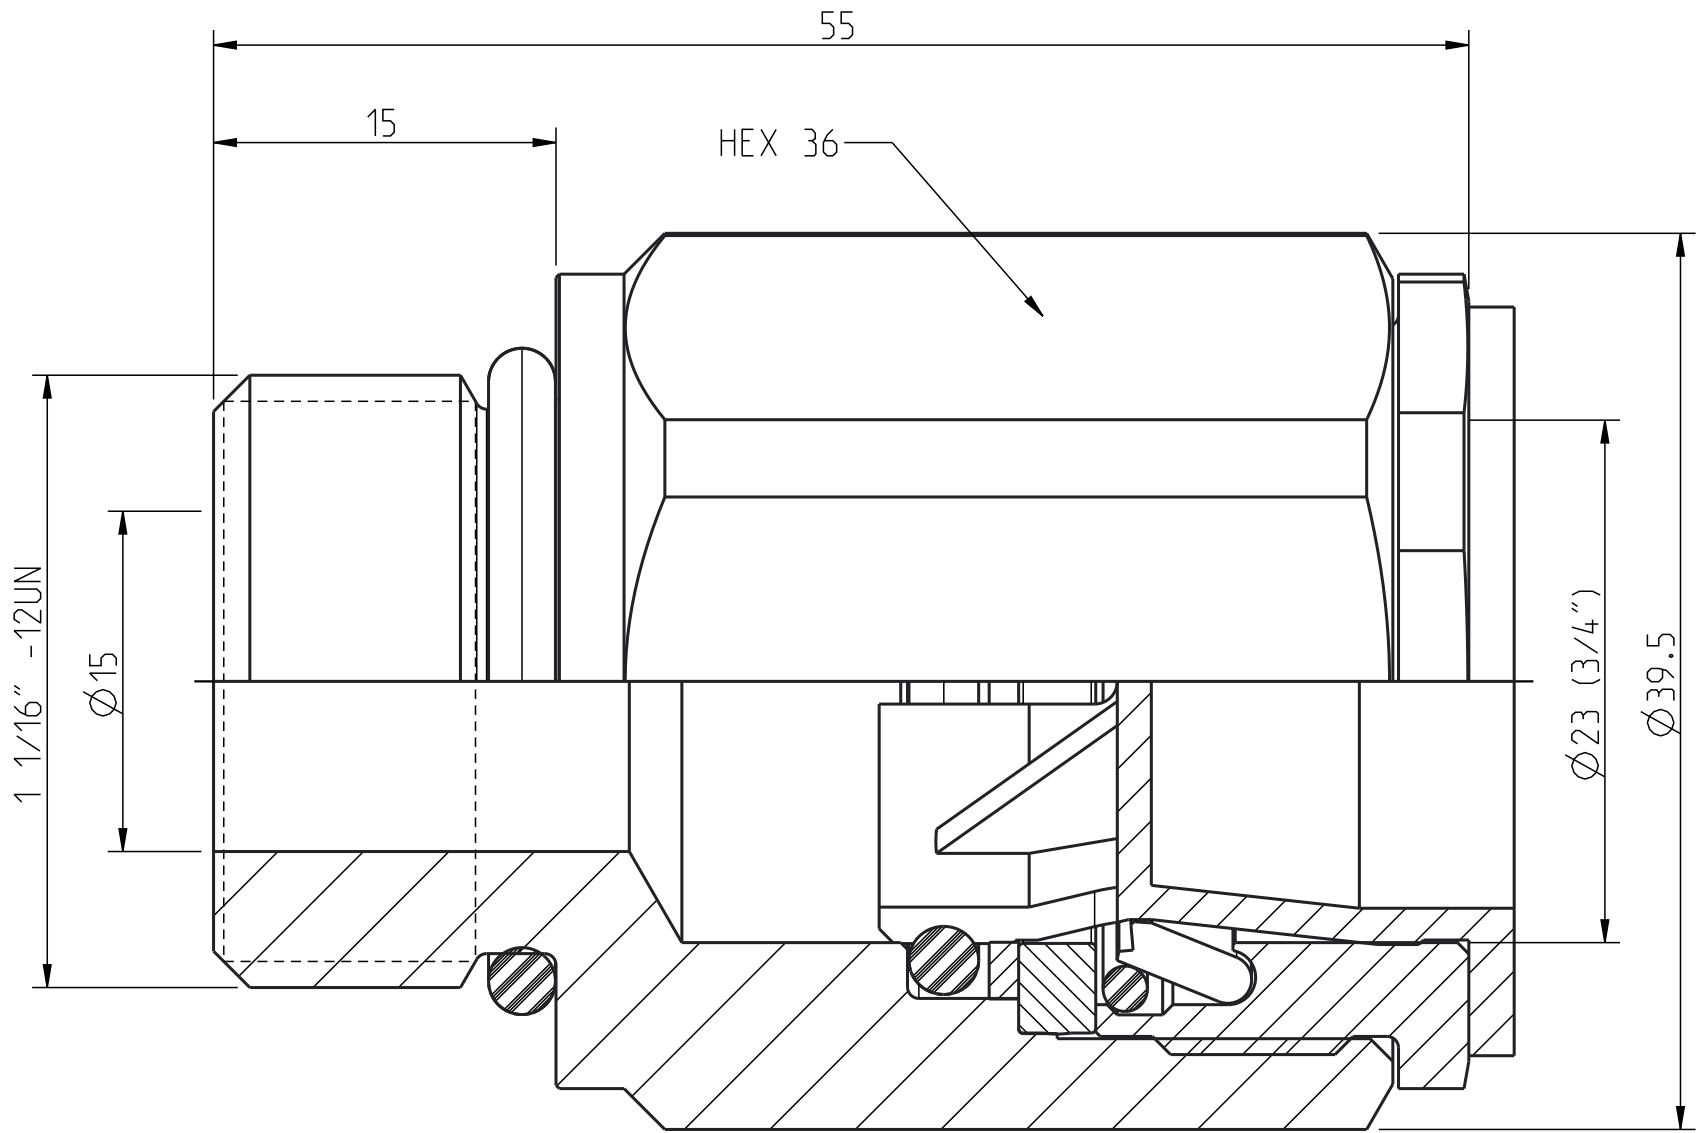

1:1

9	1	Washer	Steel, Fe/Zn 8 P1 T
8	1	Protection plug	LDPE
7	1	O-ring	NBR
6	1	O-ring	NBR
5	1	O-ring	NBR
4	5	Locking hook	Hard.steel. Fe/Zn 8 P1 T/N
3	1	Front part	Steel, Zn 8 Silver
2	1	Back-up ring	Hytrel
1	1	Back part	Steel, Zn 8 silver
Detalj Item	Antal Quant.	Benämning Description	Material Material

	Skala Scale	3:1	Ritad Drawn	MBa	Kontr. Checked	PeOd	Godk. Appr.	PMB	Äm nr. Alt. no.	10779	Dat. Date	140407
	Assembly drawing						Ritning nr/Drawing No.				50_826_1217	Utg./Issue