

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B


A

D


C

B

A



1 : 1

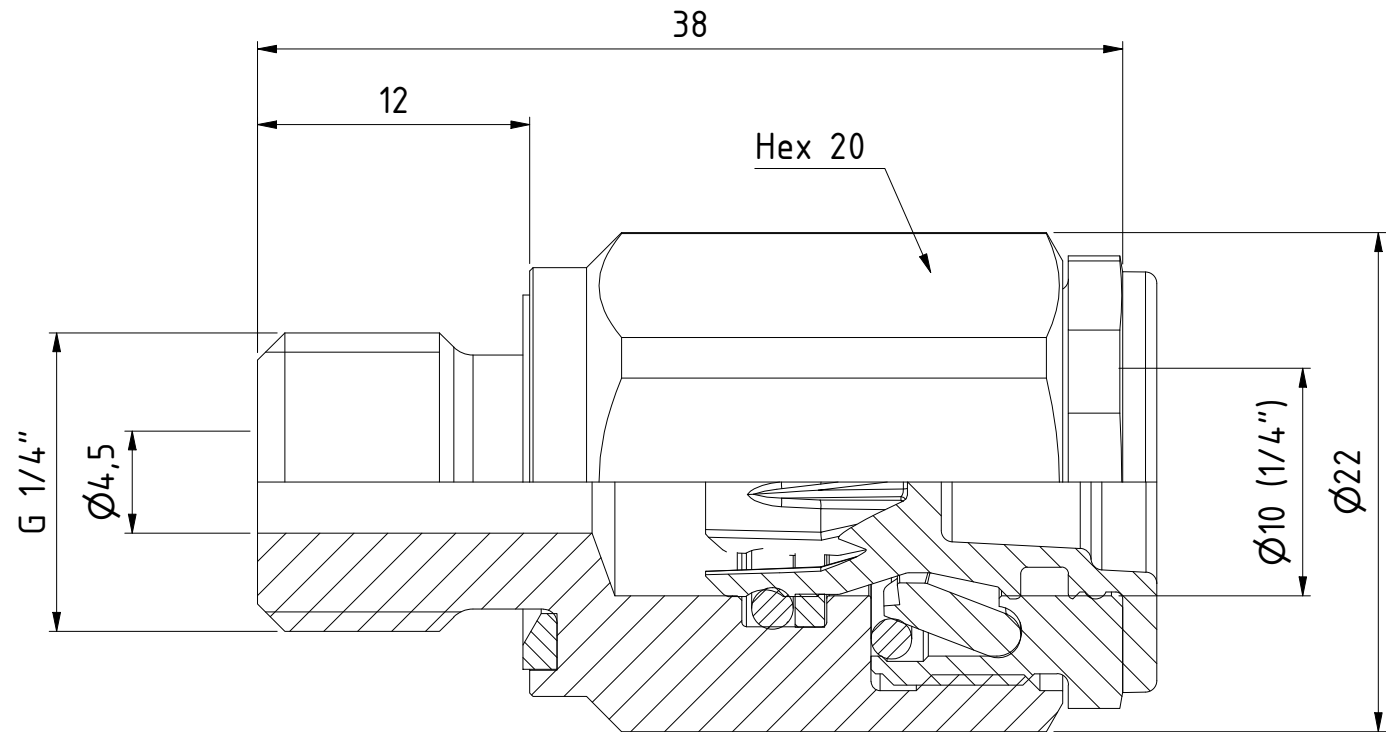

Product No. 148300404

Nominal flow $\varnothing$ DN: 4,5 mm
Connection Stroke: mm
Max WP Connected: 350 bar
Max WP Disconnected: bar
Min BP Connected: 1400 bar
Min BP Disconnected: bar
Temperature range: -30°C - 100°C
Connection: 1/4" BSP acc.to DIN 3869
Sealing material: NBR
Hexagon:

8	1	Protection plug	LDPE
7	1	Back-up ring	Hytrel
6	1	O-ring	NBR
5	1	O-ring	NBR
4	4	Locking hook	Hard.steel, Plated
3	1	Front part	Steel, Zn 8 Silver
2	1	Back part	Steel, Zn 8 silver
1	1	Profile sealing ring	NBR
Item	Qty	Description	Material



Scale	Drawn	Checked	Appr.	ECO	Date
3 : 1	EP7		PMB	000874	2021-03-10

Assembly Drawing 508300404

Drawing No.	Issue	Sheet
	AF	1 /(1)