

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B


A

D


C

B

A

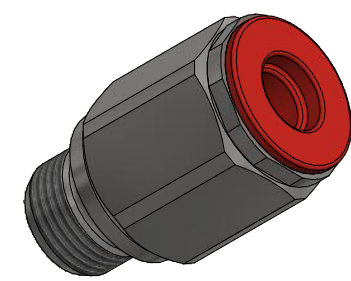

1 : 1

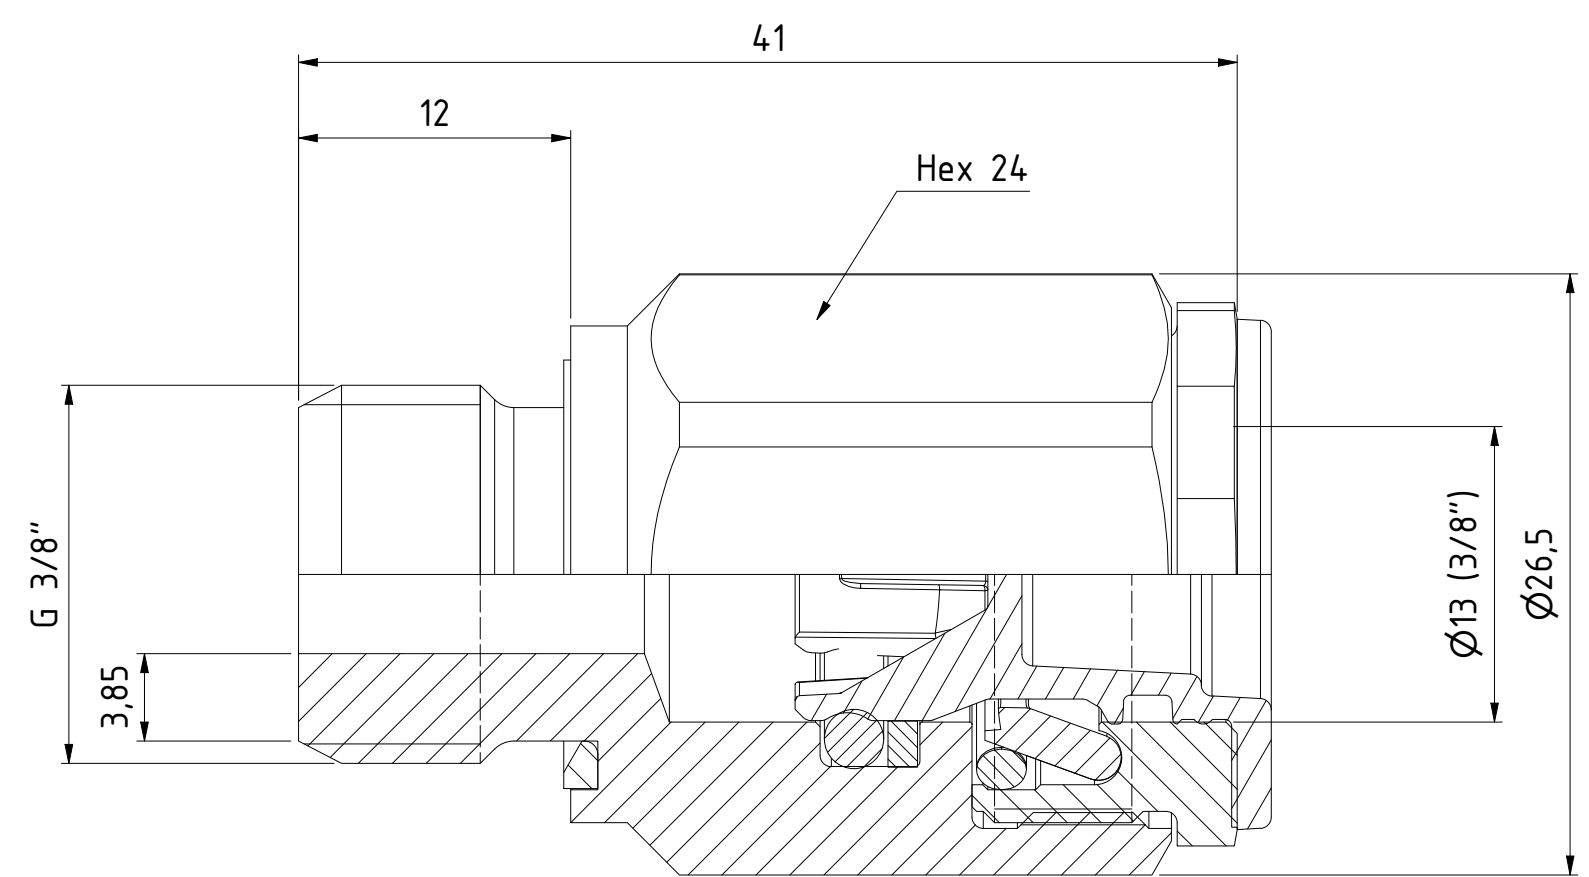

Product No. 148300606	
Nominal flow Ø DN:	7.0 mm
Connection Stroke:	mm
Max WP Connected:	350 bar
Max WP Disconnected:	bar
Min BP Connected:	1400 bar
Min BP Disconnected:	bar
Temperature range:	-30°C - +100°C
Connection:	3/8" BSP acc.to DIN 3869
Sealing material:	NBR
Hexagon:	24

Drawing acc. to QA2 (CS596)



8	1	Protection plug	LDPE
7	1	O-ring	NBR
6	1	Back-up ring	Hytrel
5	1	O-ring	NBR
4	1	Front part	Steel, Plated
3	5	Locking hook	Hard.steel, Plated
2	1	Back part	Steel, Plated
1	1	Profile sealing ring	NBR
Item	Qty	Description	Material
Scale 3 : 1		Drawn JOER	Checked
		Appr.	ECO 000657
		Date 2017-11-27	
		Drawing No.	Issue Sheet
		AE	1 /(1)
Assembly Drawing 508300606			