

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B


A

D


C

B

A

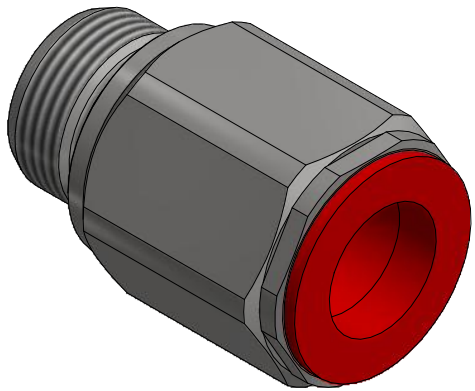

1 : 1

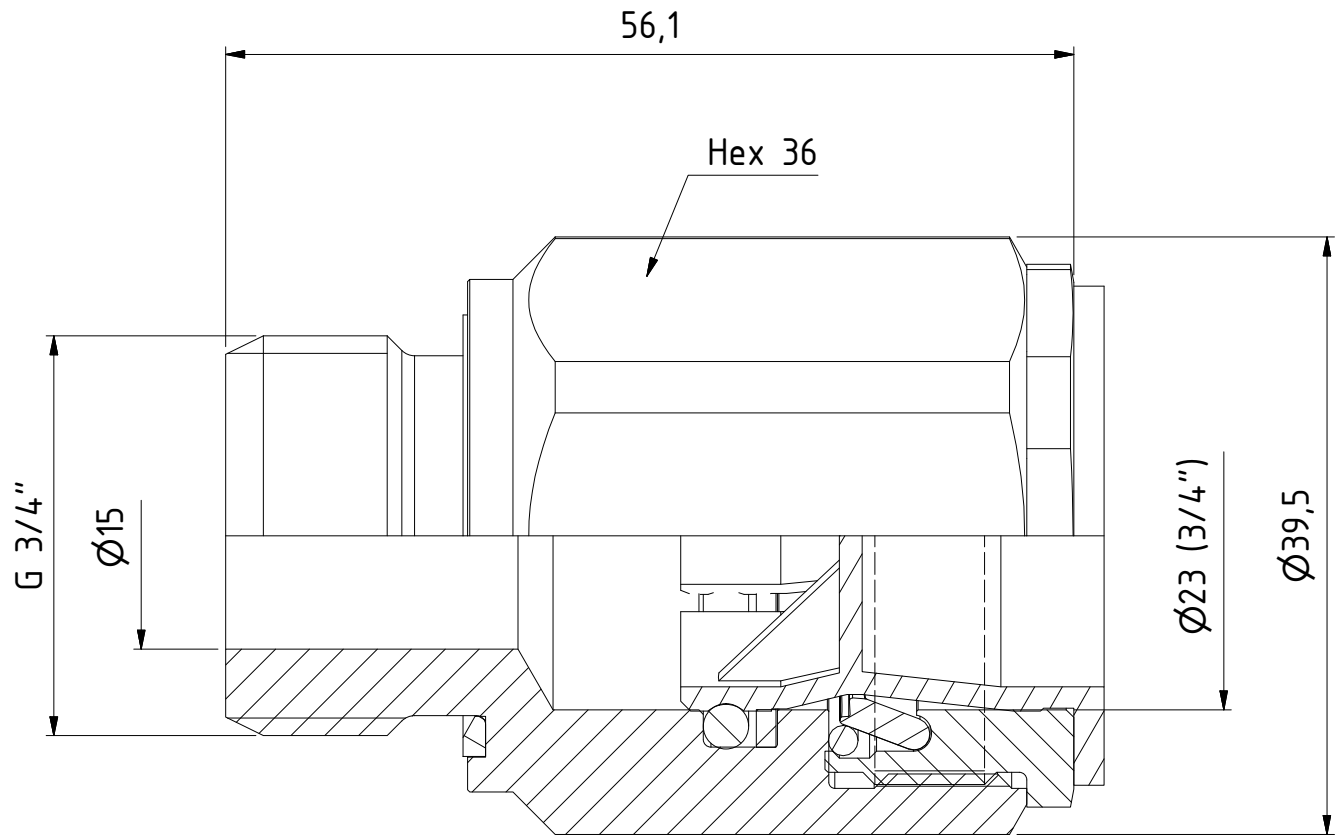

Product No. 148301212

Nominal flow $\varnothing$ DN: 15,0 mm
Connection Stroke: mm
Max WP Connected: 350 bar
Max WP Disconnected: bar
Min BP Connected: 1400 bar
Min BP Disconnected: bar
Temperature range: -30°C - +100°C
Connection: 3/4" BSP acc.to DIN 3869
Sealing material: NBR
Hexagon: 36

8	1	O-Ring	NBR	095172801
7	5	Locking hook	Steel, hardened, Zn	095176827
6	1	Front part	Steel, Zn 8 Silver	095172007
5	1	Protection plug	LDPE	095171010
4	1	O-Ring	NBR	095172800
3	1	Back up ring	Hytrel	095175601
2	1	Back Part	Steel, Plated	095179427
1	1	Profile sealing ring	NBR	095174600
Item	Qty	Description	Material	Part Number
		Scale	Drawn	Checked
		2 : 1	EP7	JoEr
		Appr.	PMB	ECO
		12090	Date	2018-05-21
		Drawing No.	Issue	Sheet
		148301212	AD	1 /(1)
Assembly Drawing				