
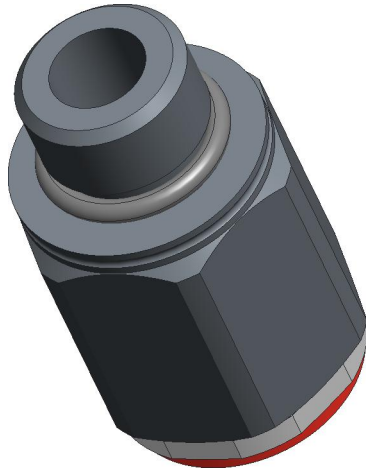


Product no: 14_831_0616		
Max working pressure:	315	bar connected bar disconnected
Min burst pressure:	1260	bar connected bar disconnected
Sealing material:	NBR	
Temperatur range:	-30°C - +100 °C	
Nominal flow diameter,DN:	9.0	mm
Connection	M16x1,5 male ISO 6149-3	
Connection stroke:	mm	

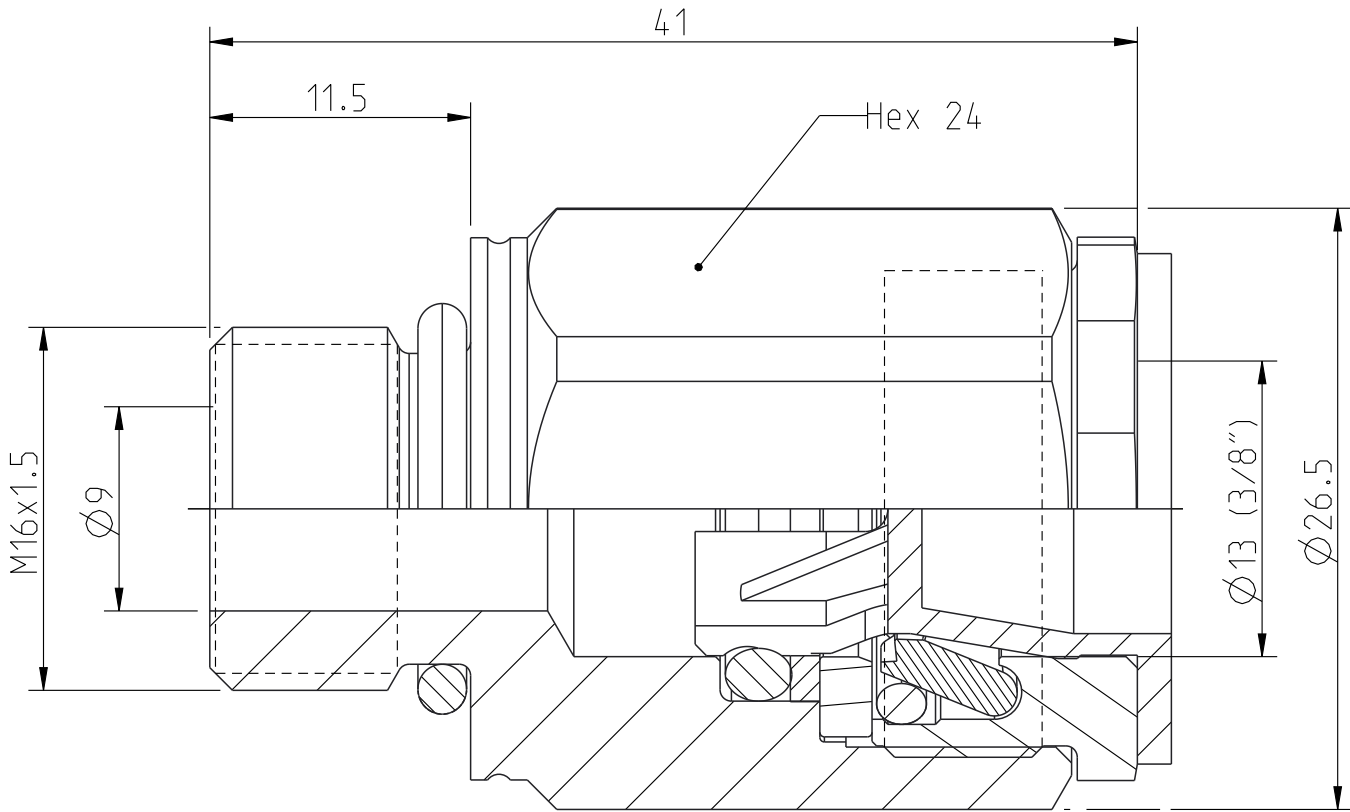

9	1	Washer	Steel, Plated
8	1	Protection plug	LDPE
7	1	O-ring	NBR
6	1	O-ring	NBR
5	1	O-ring	NBR
4	5	Locking hook	Hard.steel, Plated
3	1	Front part	Steel, Plated
2	1	Back-up ring	Hytrel
1	1	Back part	Steel, FeZn5 c 2C
Detalj Item	Antal Quant.	Benämning Description	Material Material

	Skala Scale	3:1	Ritad Drawn	CEJN ABPEOD	Kontr. Checked	MBa	Godk. Appr.	PMB	Äm nr. Alt. no.	-	Dat. Date	13-03-08
	Assembly drawing						Ritning nr./Drawing No.			Utg./Issue		
						50_831_0616			AB			