

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©





A3

D

C

B

A

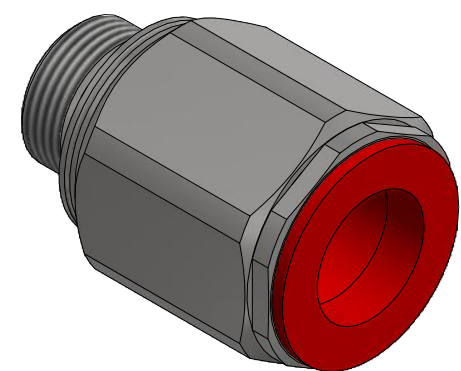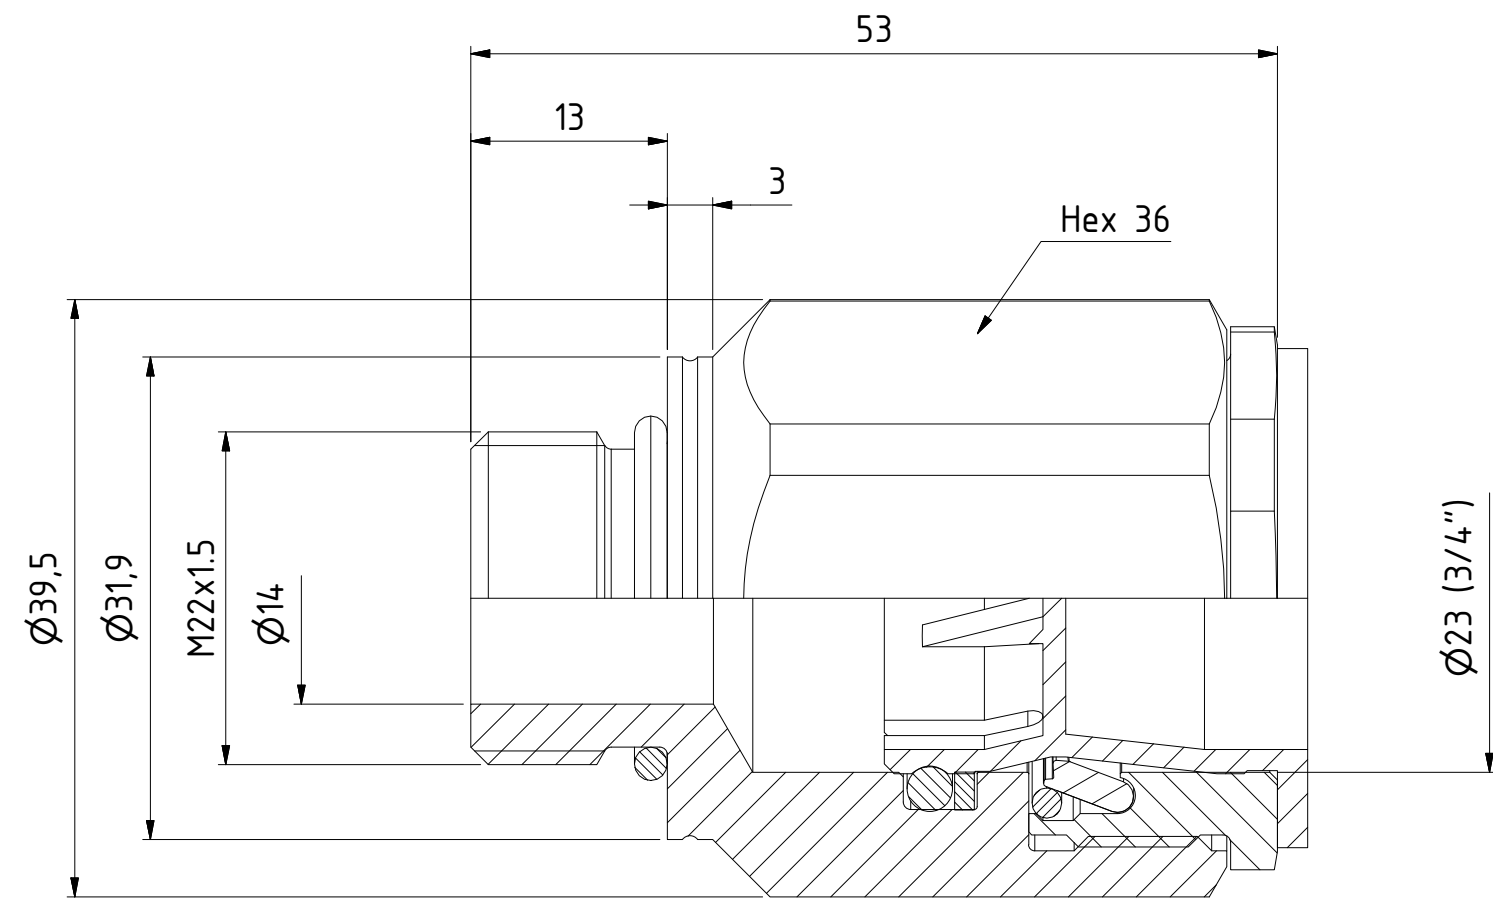

1 : 1

D

C

B

A

Product No. 148311222	
Nominal flow Ø DN:	14,0 mm
Connection Stroke:	mm
Max WP Connected:	315 bar
Max WP Disconnected:	bar
Min BP Connected:	1260 bar
Min BP Disconnected:	bar
Temperature range:	-30°C - +100°C
Connection:	M22x1,5 male
Sealing material:	NBR
Hexagon:	36

8	1	Back Part	Steel, Plated	095179437
7	1	O-Ring	NBR	095172801
6	5	Locking hook	Steel, hardened, Zn	095176827
5	1	Front part	Steel, Zn 8 Silver	095172007
4	1	Protection plug	LDPE	095171010
3	1	O-Ring	NBR	095172800
2	1	Back up ring	Hytrel	095175601
1	1	O-ring	NBR	095172804
Item	Qty	Description	Material	Part Number
		Scale 2 : 1	Drawn EP7	Checked
		Appr. PMB		ECO 12104
		Date 2018-08-14		Issue AC
		Sheet 1 /(1)		



Assembly Drawing		508311222
------------------	--	-----------