


Fig. A

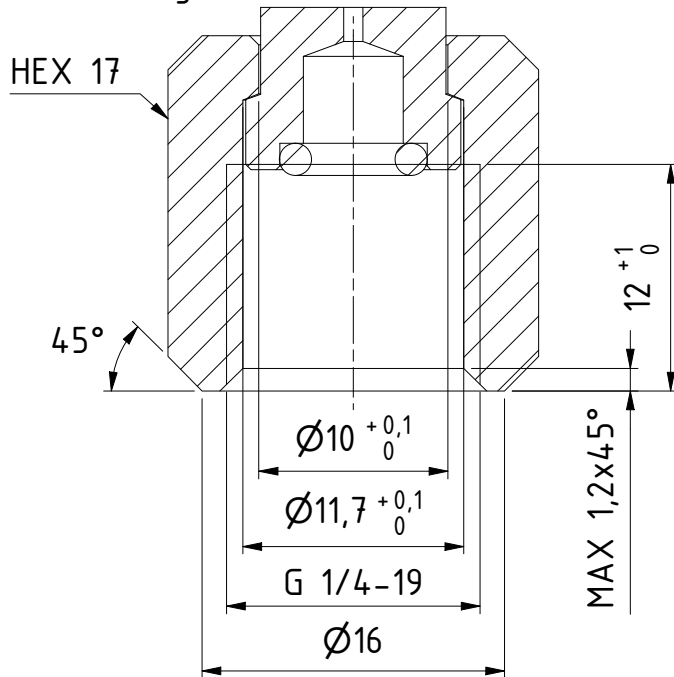

Inv./Utv. diam.:

Ø2.0 x 4.9 prickat utf.

Anslutning:


1 st enl. Fig. A

1 st enl. Fig B

Längd över ans-
lutning: 1600 mm

Arbetsstryck: 600 bar

Fig. B

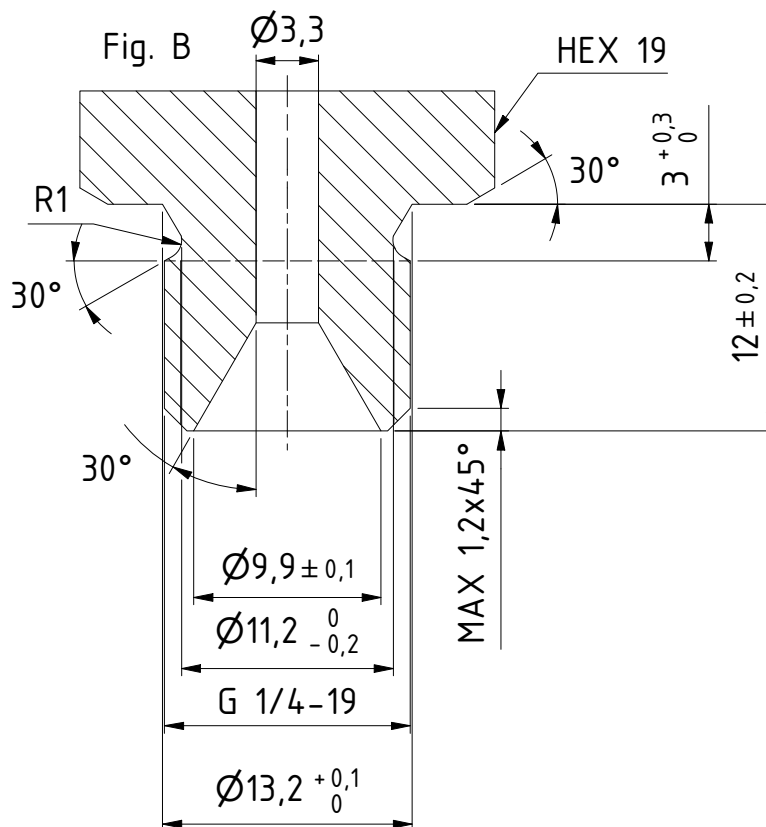

Int./ext. diam.:

Ø2.0 x 4.9 pin pricked

Connection:

1 pcs. acc. to Fig. A

1 pcs. acc. to Fig. B

Length over
connection: 1600 mm

Working

pressure: 600 bar

CEJN Std. Spec.	①	②	③	④	⑤	⑥	Material		
Treatment							Condition		
Sharp edges to be burred 0.05-0.2		General surface roughness Ra		Unless otherwise prescribed, tolerances acc.			Remark		
Drawn RoHa		Checked		Appr.		Date 2022-07-03	ECO 001333	Former No.	
				Blank dwg.				Scale 5:2	
				Drawing No. 193560041				Issue B	Sheet 1 /(1)