


This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



|   |                      |                           |
|---|----------------------|---------------------------|
| A | Product No.          | 199112173 - Anti-Spark    |
|   | Hose dim. (ID x OD): | 9,5x13,5 mm               |
|   | Hose length:         | 14 m                      |
|   | Feeder hose length:  | 1,5 m                     |
|   | Hose material:       | Braided PUR (ester based) |
|   | Temperature range:   | -20°C - +60°C             |
|   | Connection 1:        | 315-nipple                |
|   | Connection 2:        | eSafe 315                 |
| A | Sealing material:    | NBR                       |
|   | Max WP Connected:    | 12 bar                    |
|   | Weight:              | 6,4 kg                    |

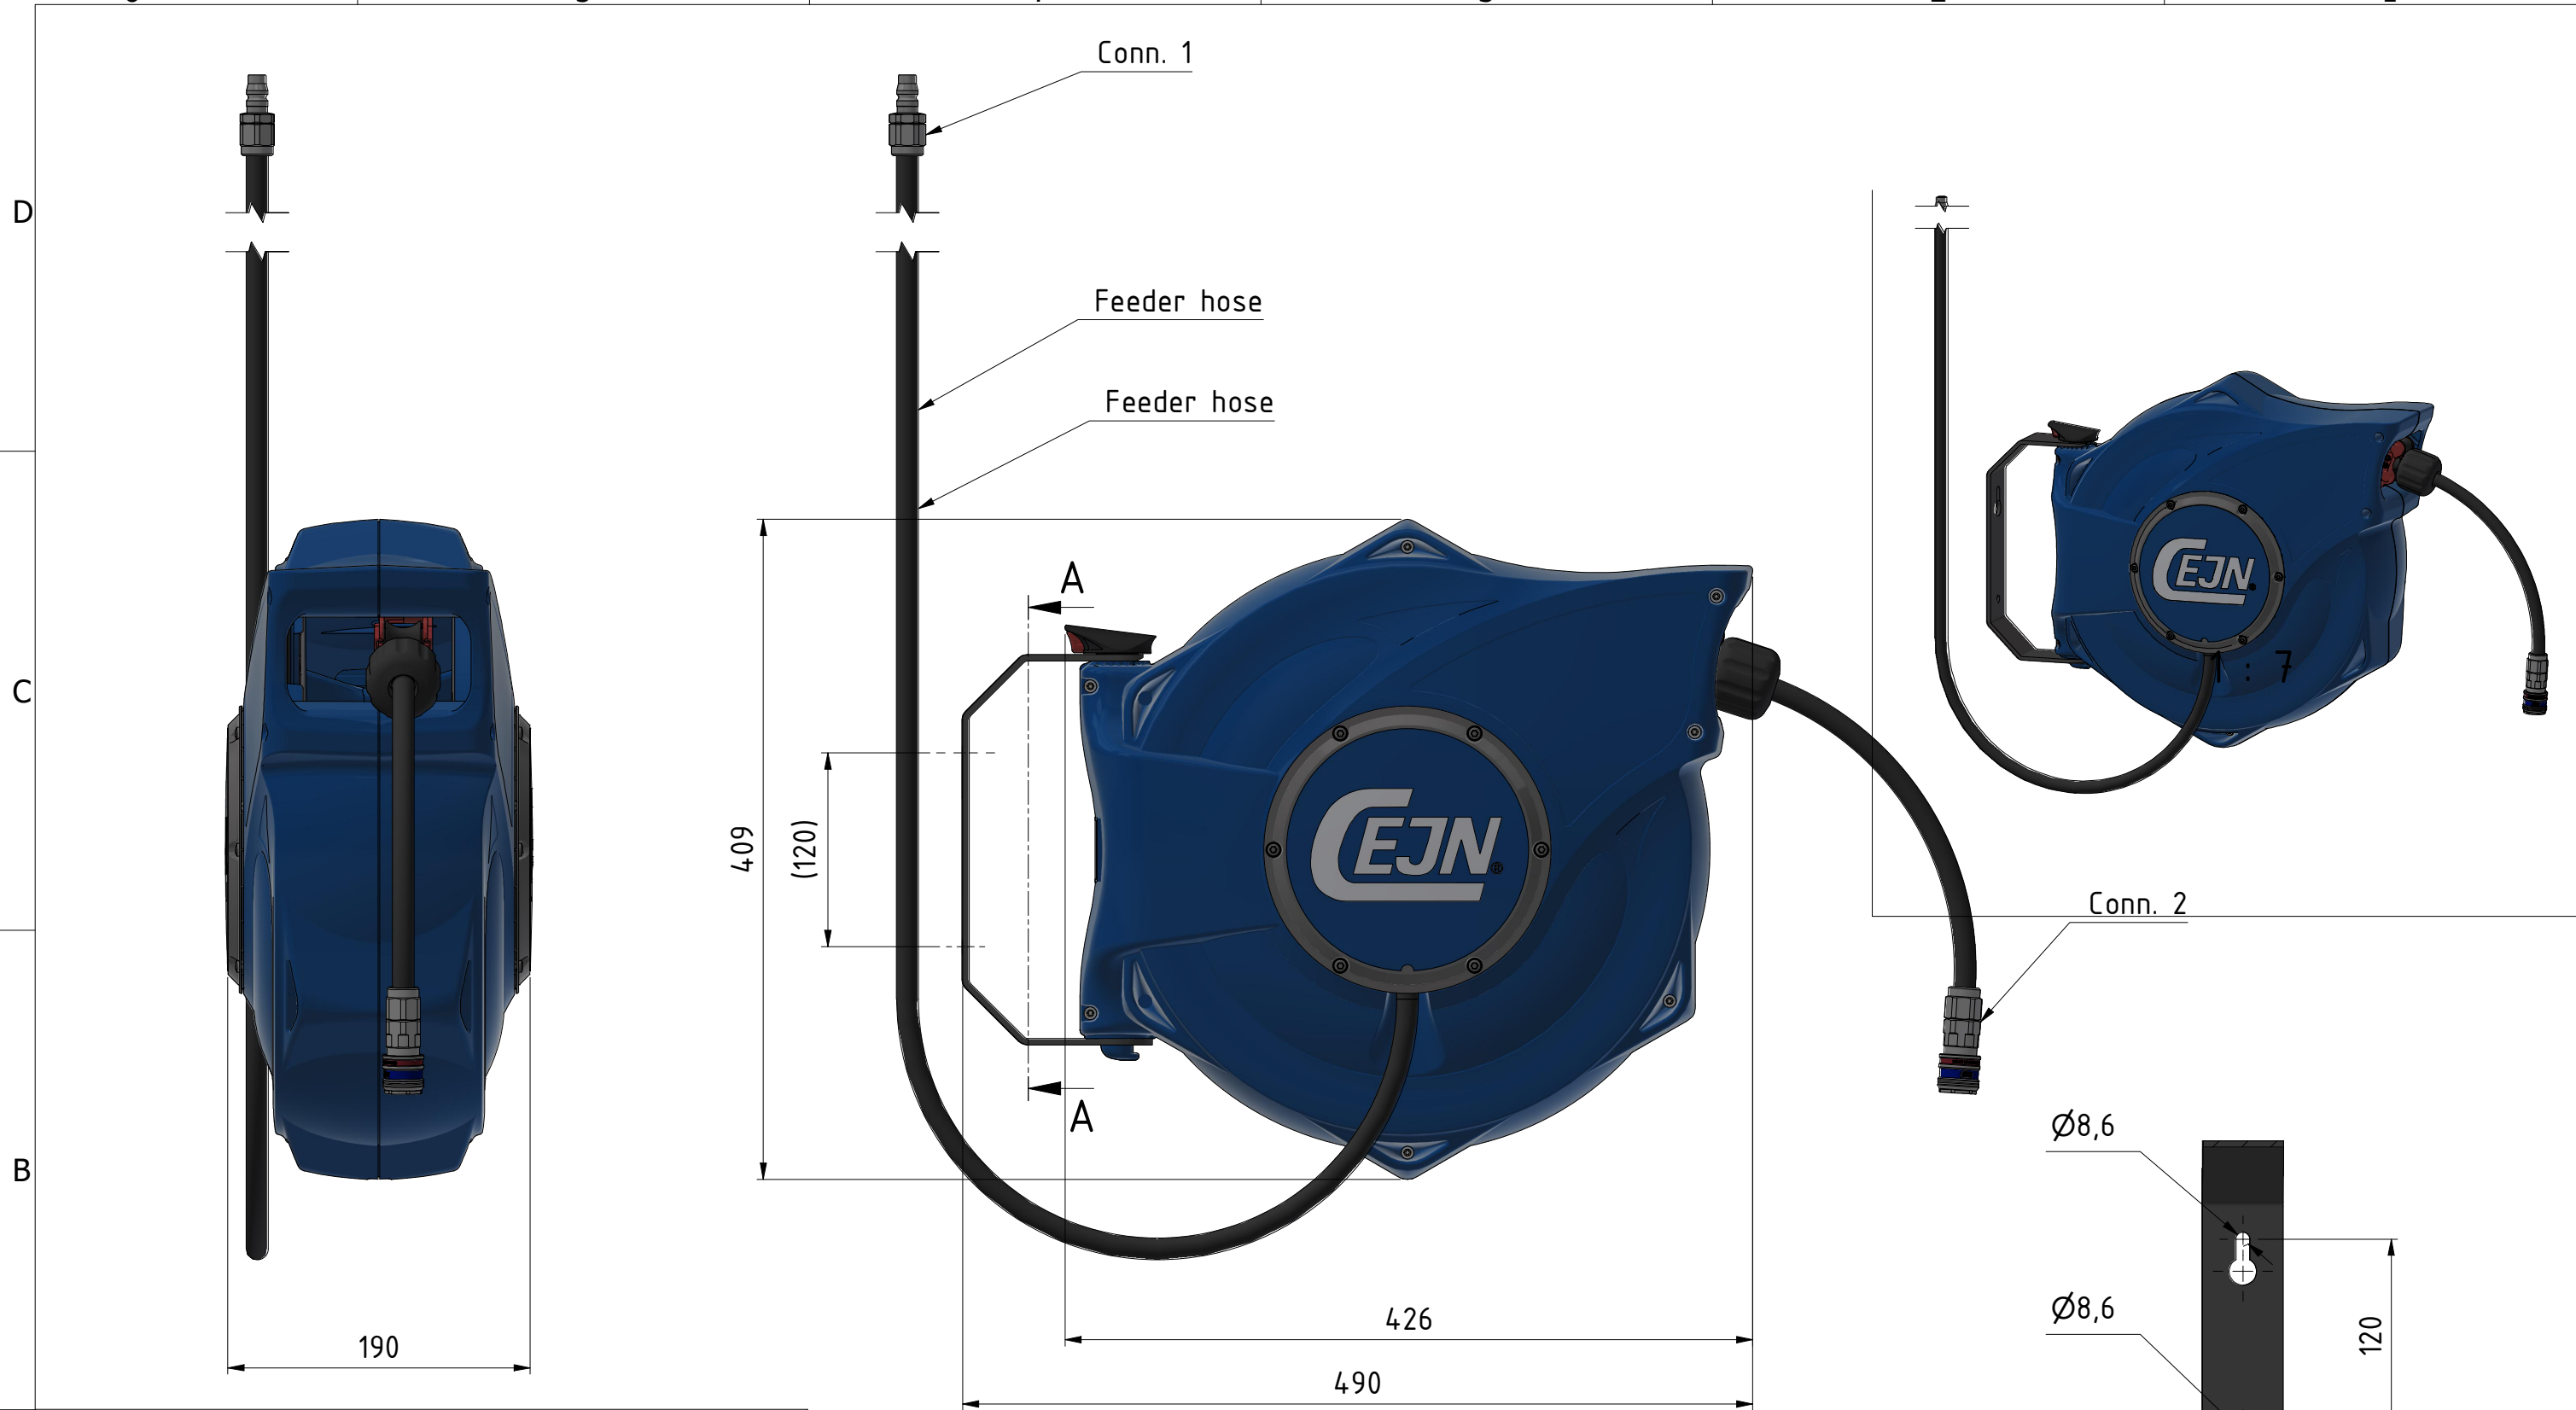

|                            |       |       |        |         |      |       |      |     |             |       |         |
|----------------------------|-------|-------|--------|---------|------|-------|------|-----|-------------|-------|---------|
| Scale                      | 1 : 4 | Drawn | CABLHE | Checked | ANLA | Appr. | JOOL | ECO | 001594      | Date  |         |
| Assembly Drawing 199112173 |       |       |        |         |      |       |      |     | Drawing No. | Issue | Sheet   |
|                            |       |       |        |         |      |       |      |     |             | C     | 1 /(1 ) |