
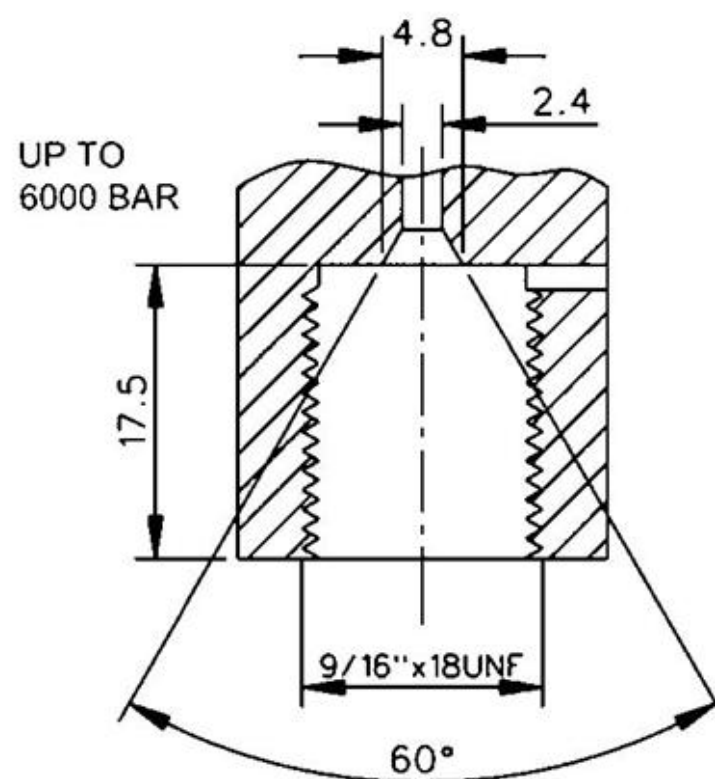
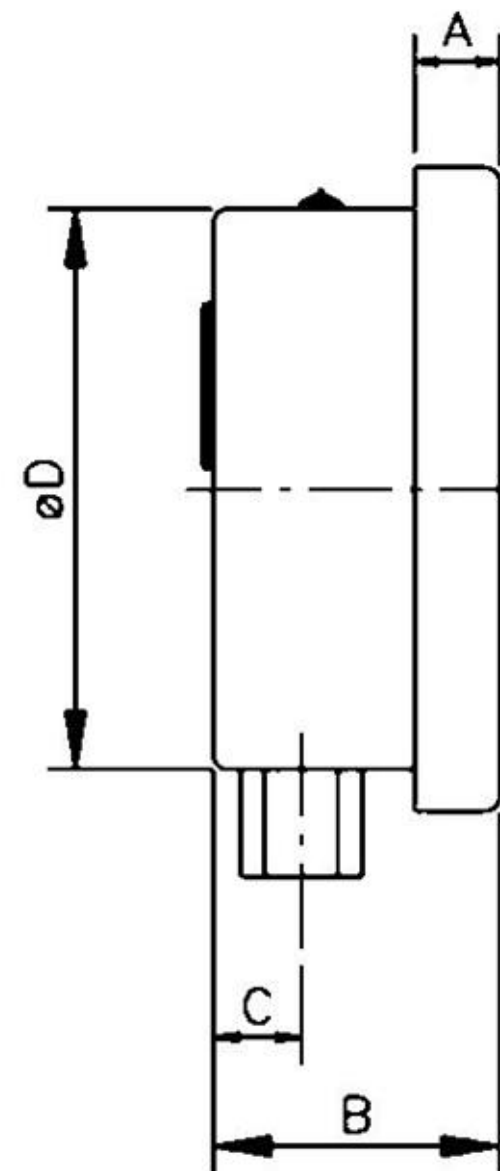


Cejn Pressure Gauges - Bottom Mounting Female Thread

Part No.	Dial Size	Units	Weight [kg]	A	B	C	D	E	F	N
199404175	Ø150	bar and psi	1,80	16	50	15	149,5	165	94	22

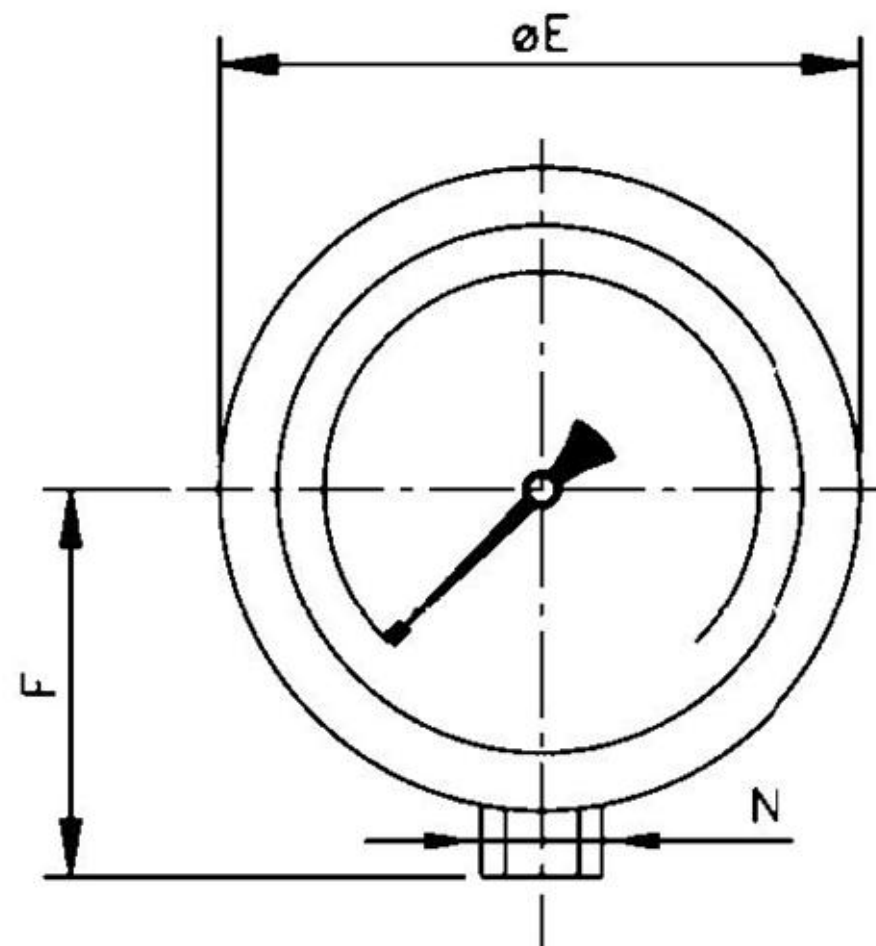

Technical Data

Harmonised Standards: EN 837, PED 2014/68/EU.

Range: 5500 bar (WP 4000 bar).

Max rec. WP: Steady max 75% FSD, pulsating max 60% FSD.

Over Pressure: Safe to 10% FSD for a short period only.

Logotype: Cejn Blue.

Protection Class: IP 65 (EN 60529).

Liquid: Filled with 98% glycerine.

Accuracy: $\pm 1\%$ of FSD.

Ambient: 0 to 60°C glycerine filled case,

Temperatur Range: Ambient: -10 to 55°C glycerine filled case,
Process: 0 to 65°C glycerine filled case,

Thermal drift from 20°C: $\pm 0,4\%$ / 10°C.

Material:	Stainless steel construction, white one side aluminium dial, black aluminium pointer, window of polycarbonate.
-----------	--

*FSD (Full Scale Deflection).