

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B



A

D

C

B

A

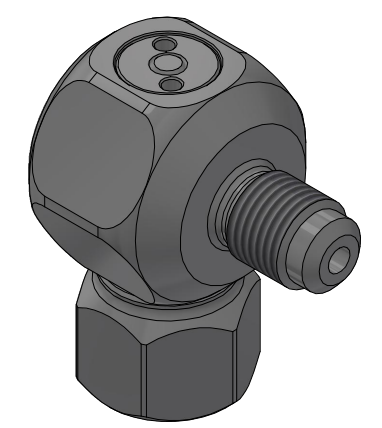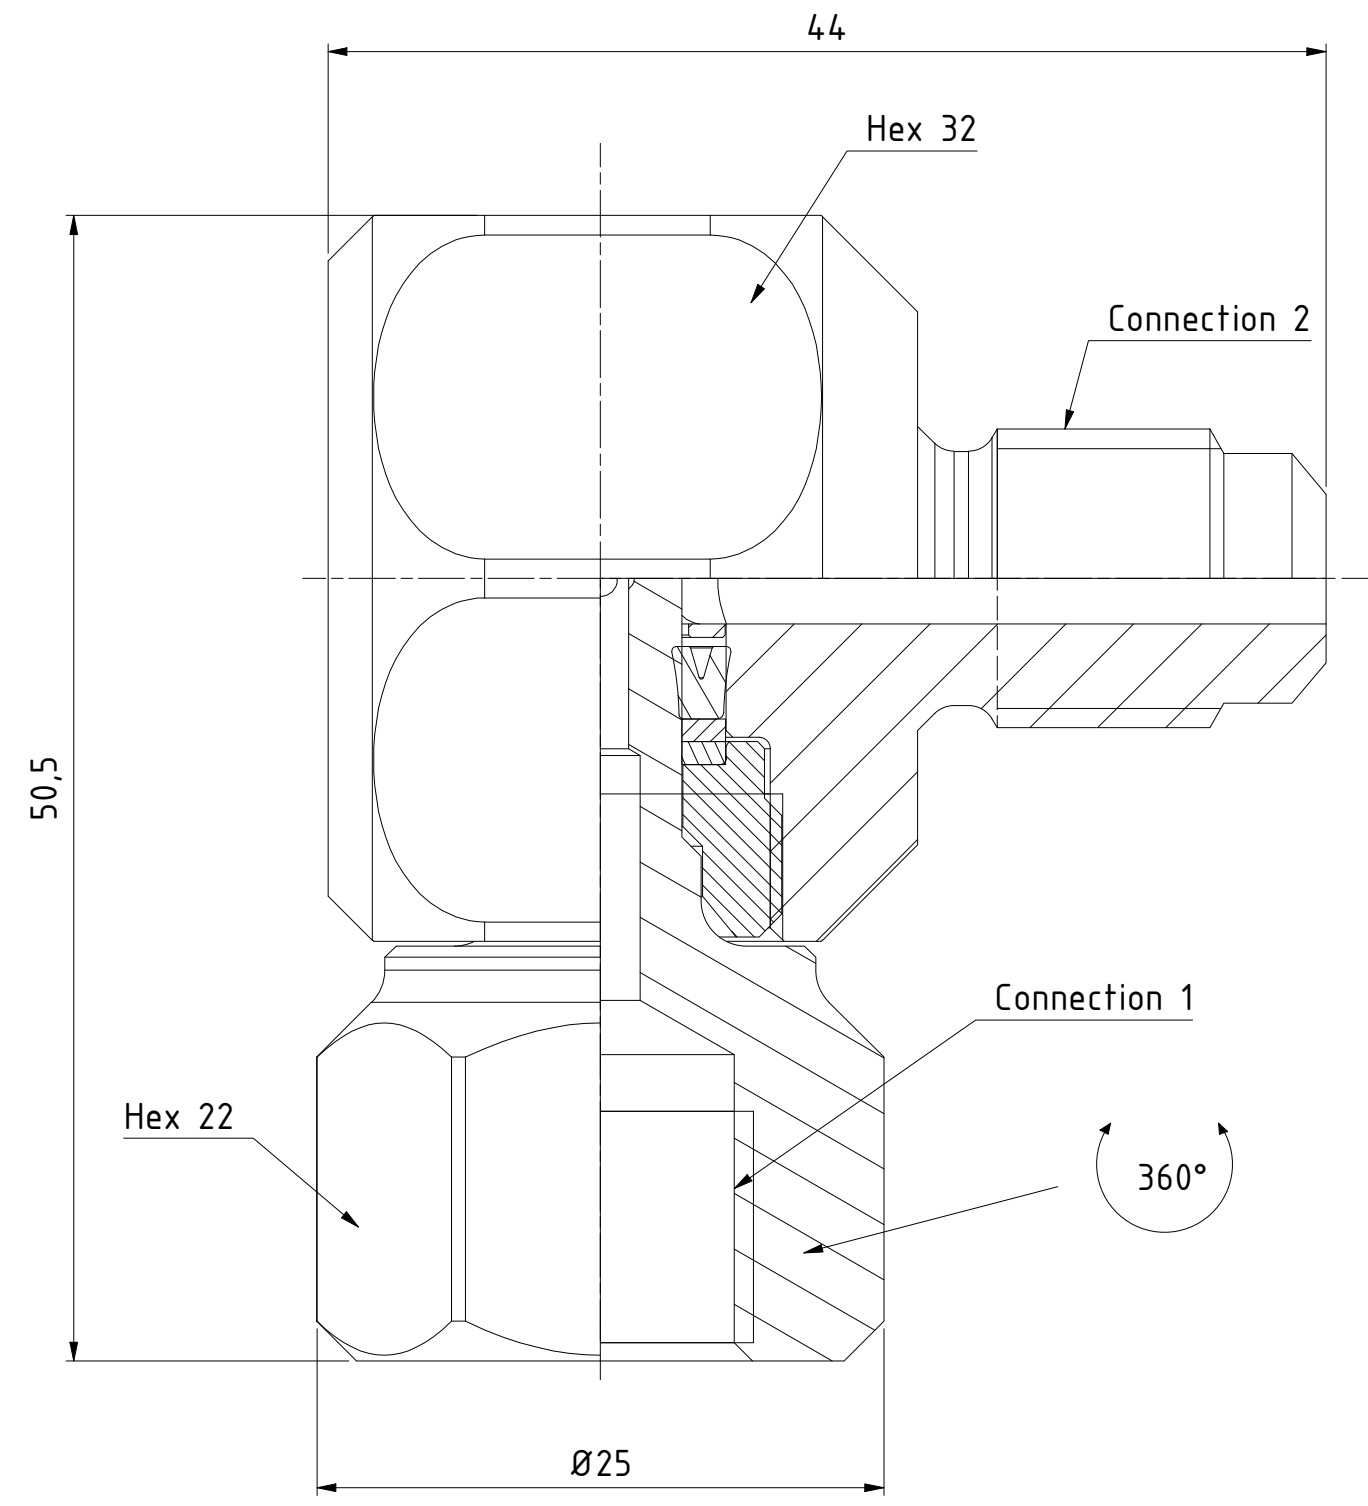

1 : 1

Product No. 199501650	
Nominal flow Ø DN:	2,5 mm
Max WP Connected:	1500 bar
Min BP Connected:	3000 bar
Temperature range:	-30°C - +100°C
Connection 1:	G 1/4" fem CMS 120° cone
Connection 2:	G 1/4" male CMS 120° cone
Sealing material:	NBR
Hexagon:	See drawing
Recommended torque:	Nm

9	2	Lip seal	NBR 80°±3° Shore (mtrl code N80/127)	
8	2	Back-up ring	PTFE	
7	1	Nut	Steel, Zn 8 silver	
6	1	Distance sleeve	Steel	
5	1	Swivel connection	Steel, Zn 8 Silver	
3	2	Back-up ring	POM	
2	1	Locking screw	Steel, Zn 8 Silver	
1	1	Swivel housing	Steel, Chemical nickel plated	
Item	Qty	Description	Material	
		Scale 3 : 1	Drawn CABANLA	Checked EP
		Appr. JE	ECO	Date 2018-10-16
Assembly Drawing 199501650			Drawing No.	Issue D
				Sheet 1 /(1)