

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D

C


B

A

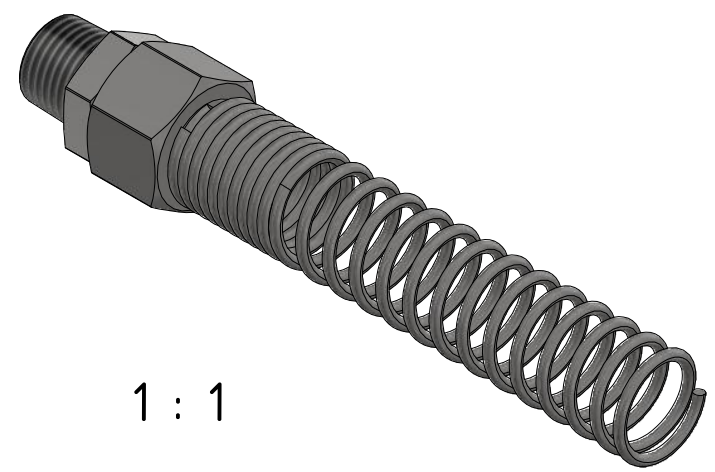

1 : 1

(115)

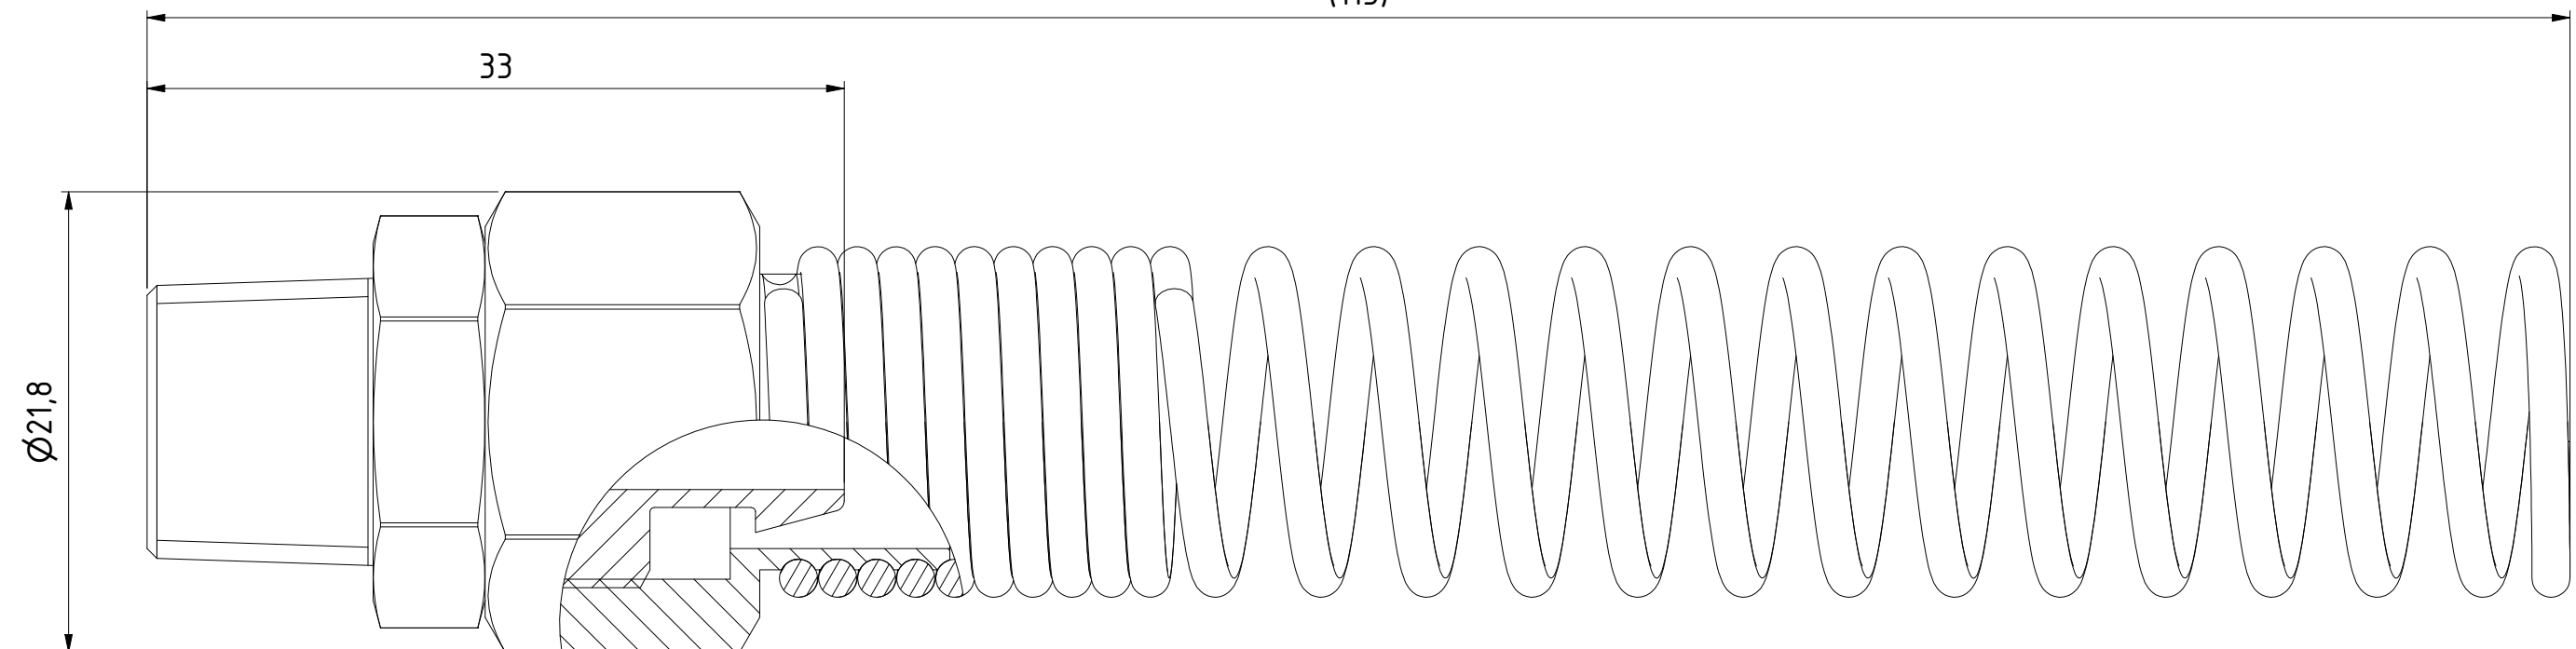

Product No. 199581213	
Nominal flow Ø DN:	6,4 mm
Connection Stroke:	mm
Max WP Connected:	16 bar w. CEJN braided PUR hose
Min BP Connected:	64 bar w. CEJN braided PUR hose
Temperature range:	-20°C - +100°C
Connection:	R 1/4" male - streamline 8x12 spring protector
Sealing material:	
Hexagon:	17/19

2	1	Spring protection nut				Brass, plated nut. Steel spring.								
1	1	Union half nipple				Brass, Plated								
Item	Qty	Description				Material								
		Scale	3 : 1	Drawn	CABANLA	Checked	LHE	Appr.	JOOL	ECO	Date	2020-06-08		
		Assembly Drawing						Drawing No. 509581213			Issue	AA	Sheet	1 /(1)