


This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

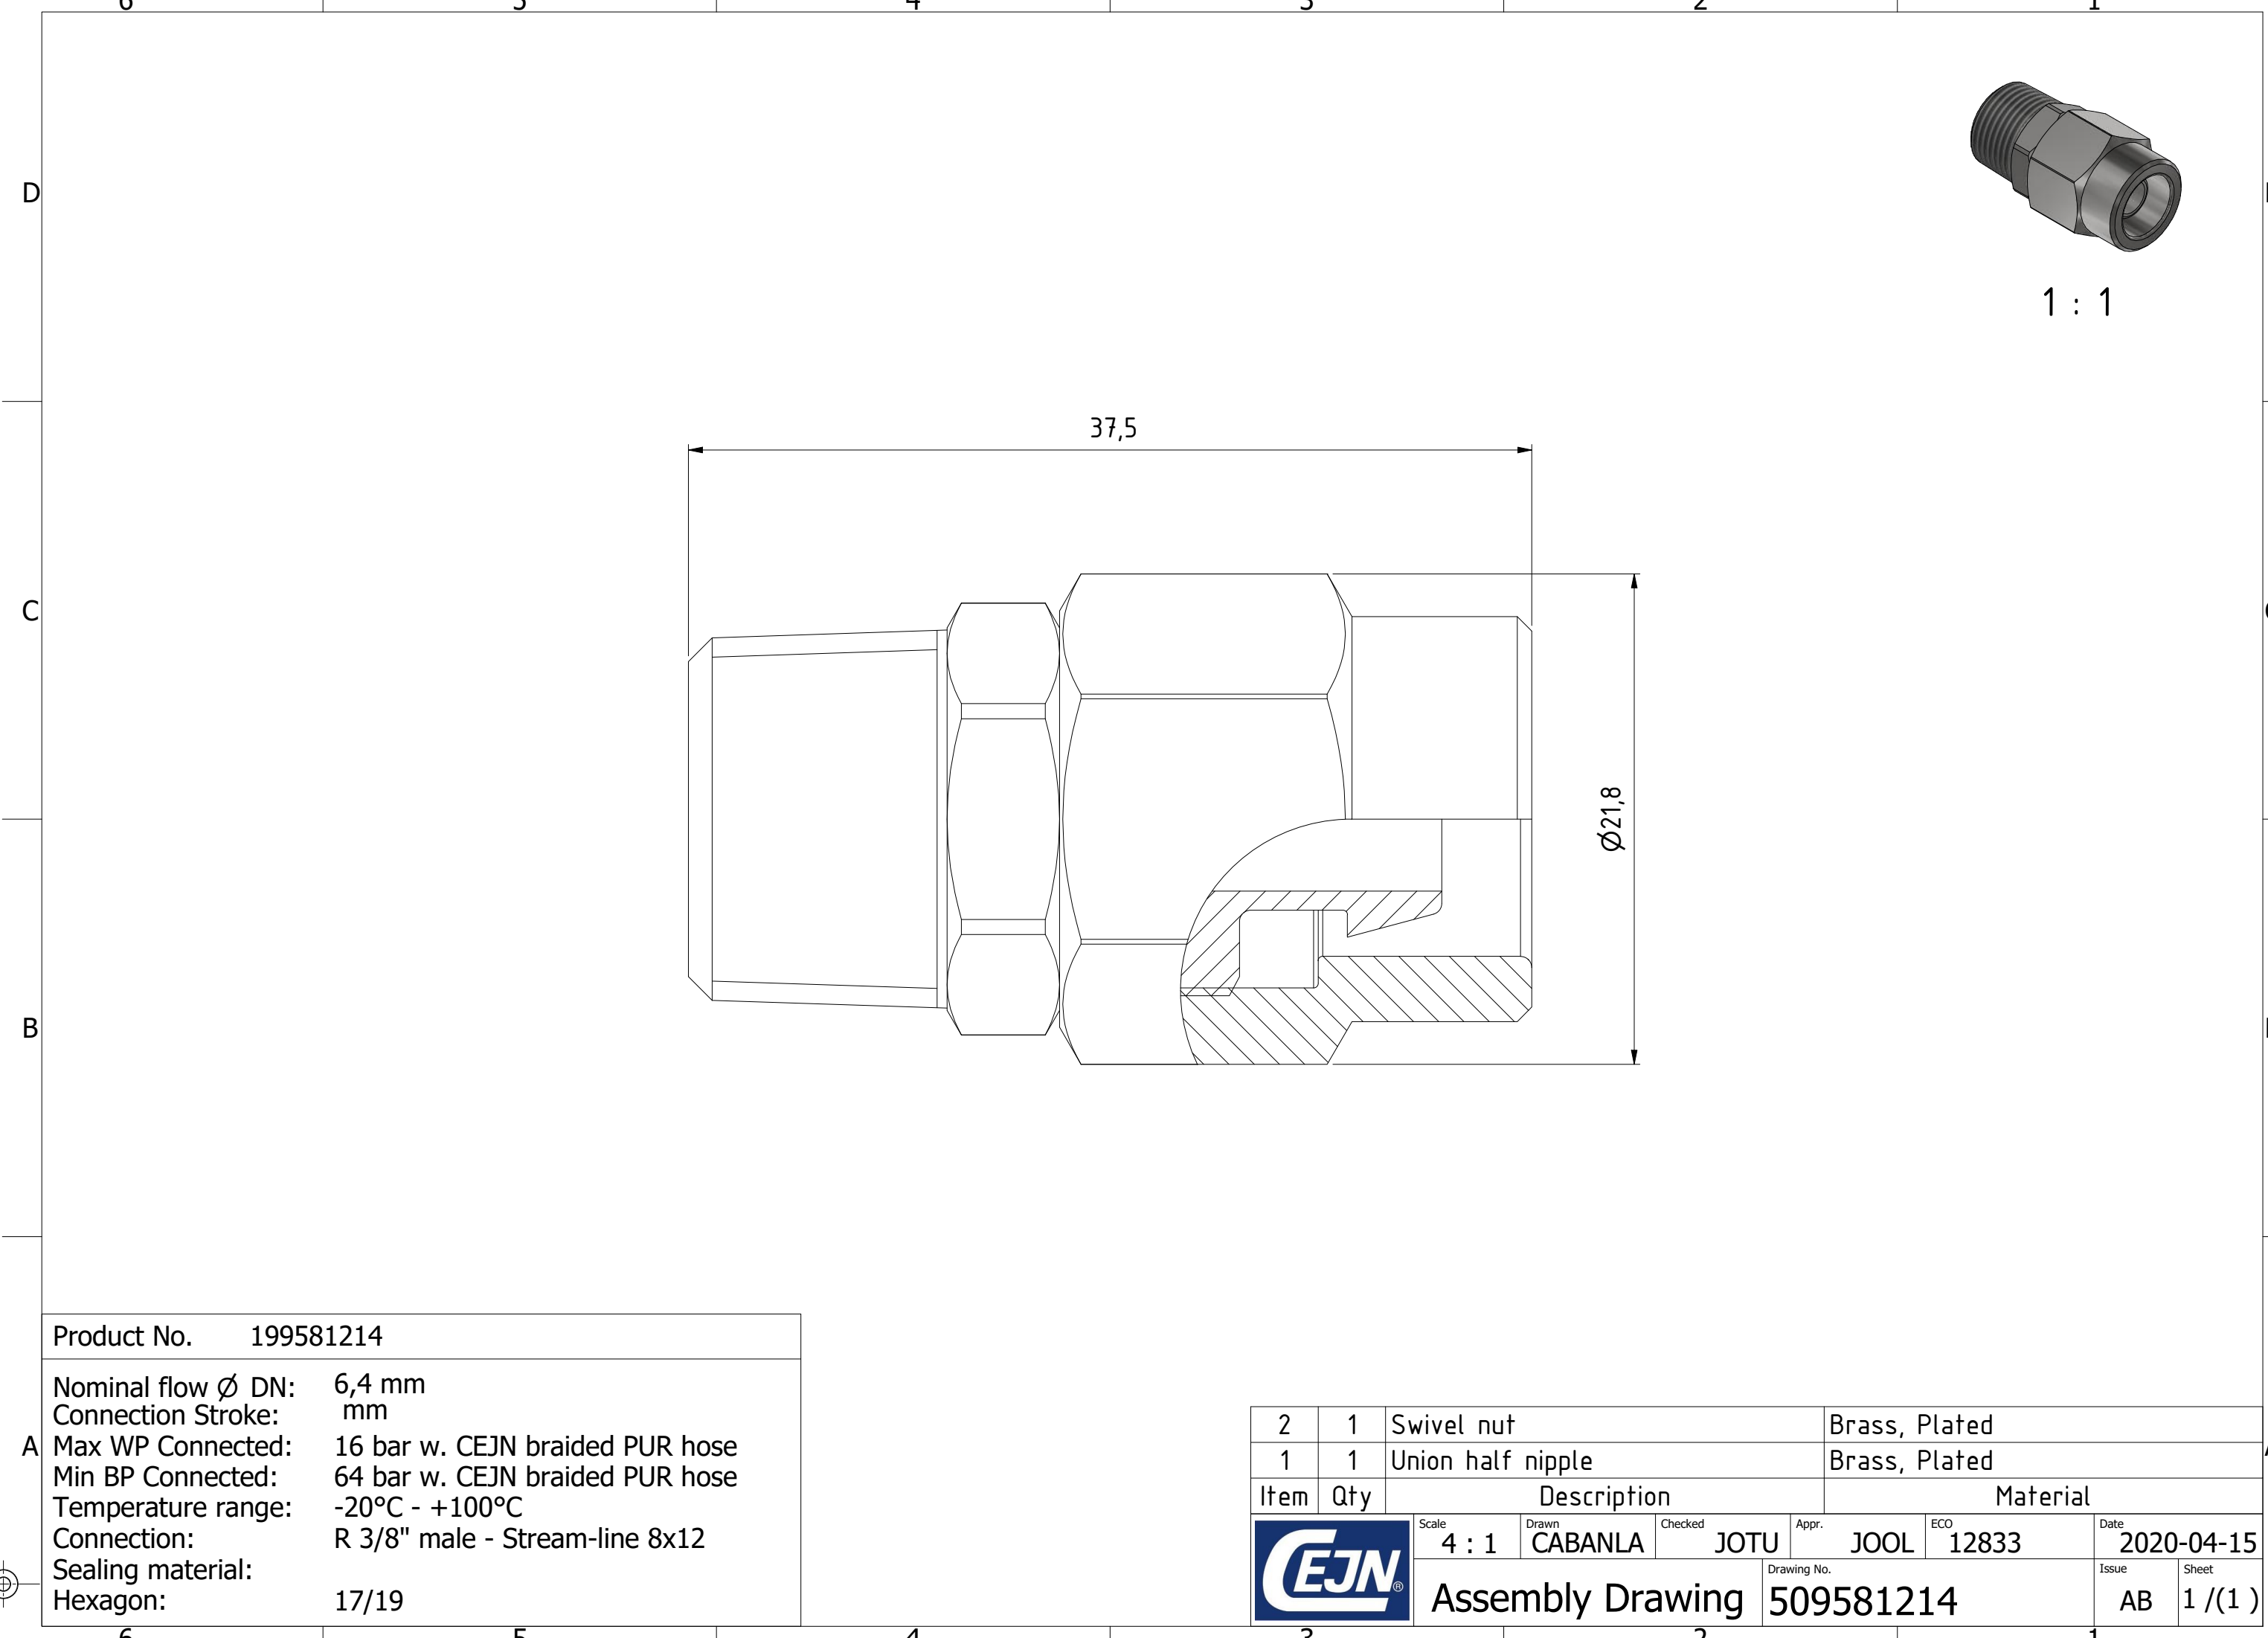

|                       |                                 |
|-----------------------|---------------------------------|
| Product No. 199581214 |                                 |
| Nominal flow Ø DN:    | 6,4 mm                          |
| Connection Stroke:    | mm                              |
| Max WP Connected:     | 16 bar w. CEJN braided PUR hose |
| Min BP Connected:     | 64 bar w. CEJN braided PUR hose |
| Temperature range:    | -20°C - +100°C                  |
| Connection:           | R 3/8" male - Stream-line 8x12  |
| Sealing material:     |                                 |
| Hexagon:              | 17/19                           |

|      |     |                            |               |            |       |         |
|------|-----|----------------------------|---------------|------------|-------|---------|
| 2    | 1   | Swivel nut                 | Brass, Plated |            |       |         |
| 1    | 1   | Union half nipple          | Brass, Plated |            |       |         |
| Item | Qty | Description                |               | Material   |       |         |
|      |     | Scale                      | Drawn         | Checked    | Appr. | ECO     |
|      |     | 4 : 1                      | CABANLA       | JOTU       | JOOL  | 12833   |
|      |     | Drawing No.                |               |            | Issue | Sheet   |
|      |     | Assembly Drawing 509581214 |               |            | AB    | 1 /(1 ) |
|      |     | Date                       |               | 2020-04-15 |       |         |