


This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

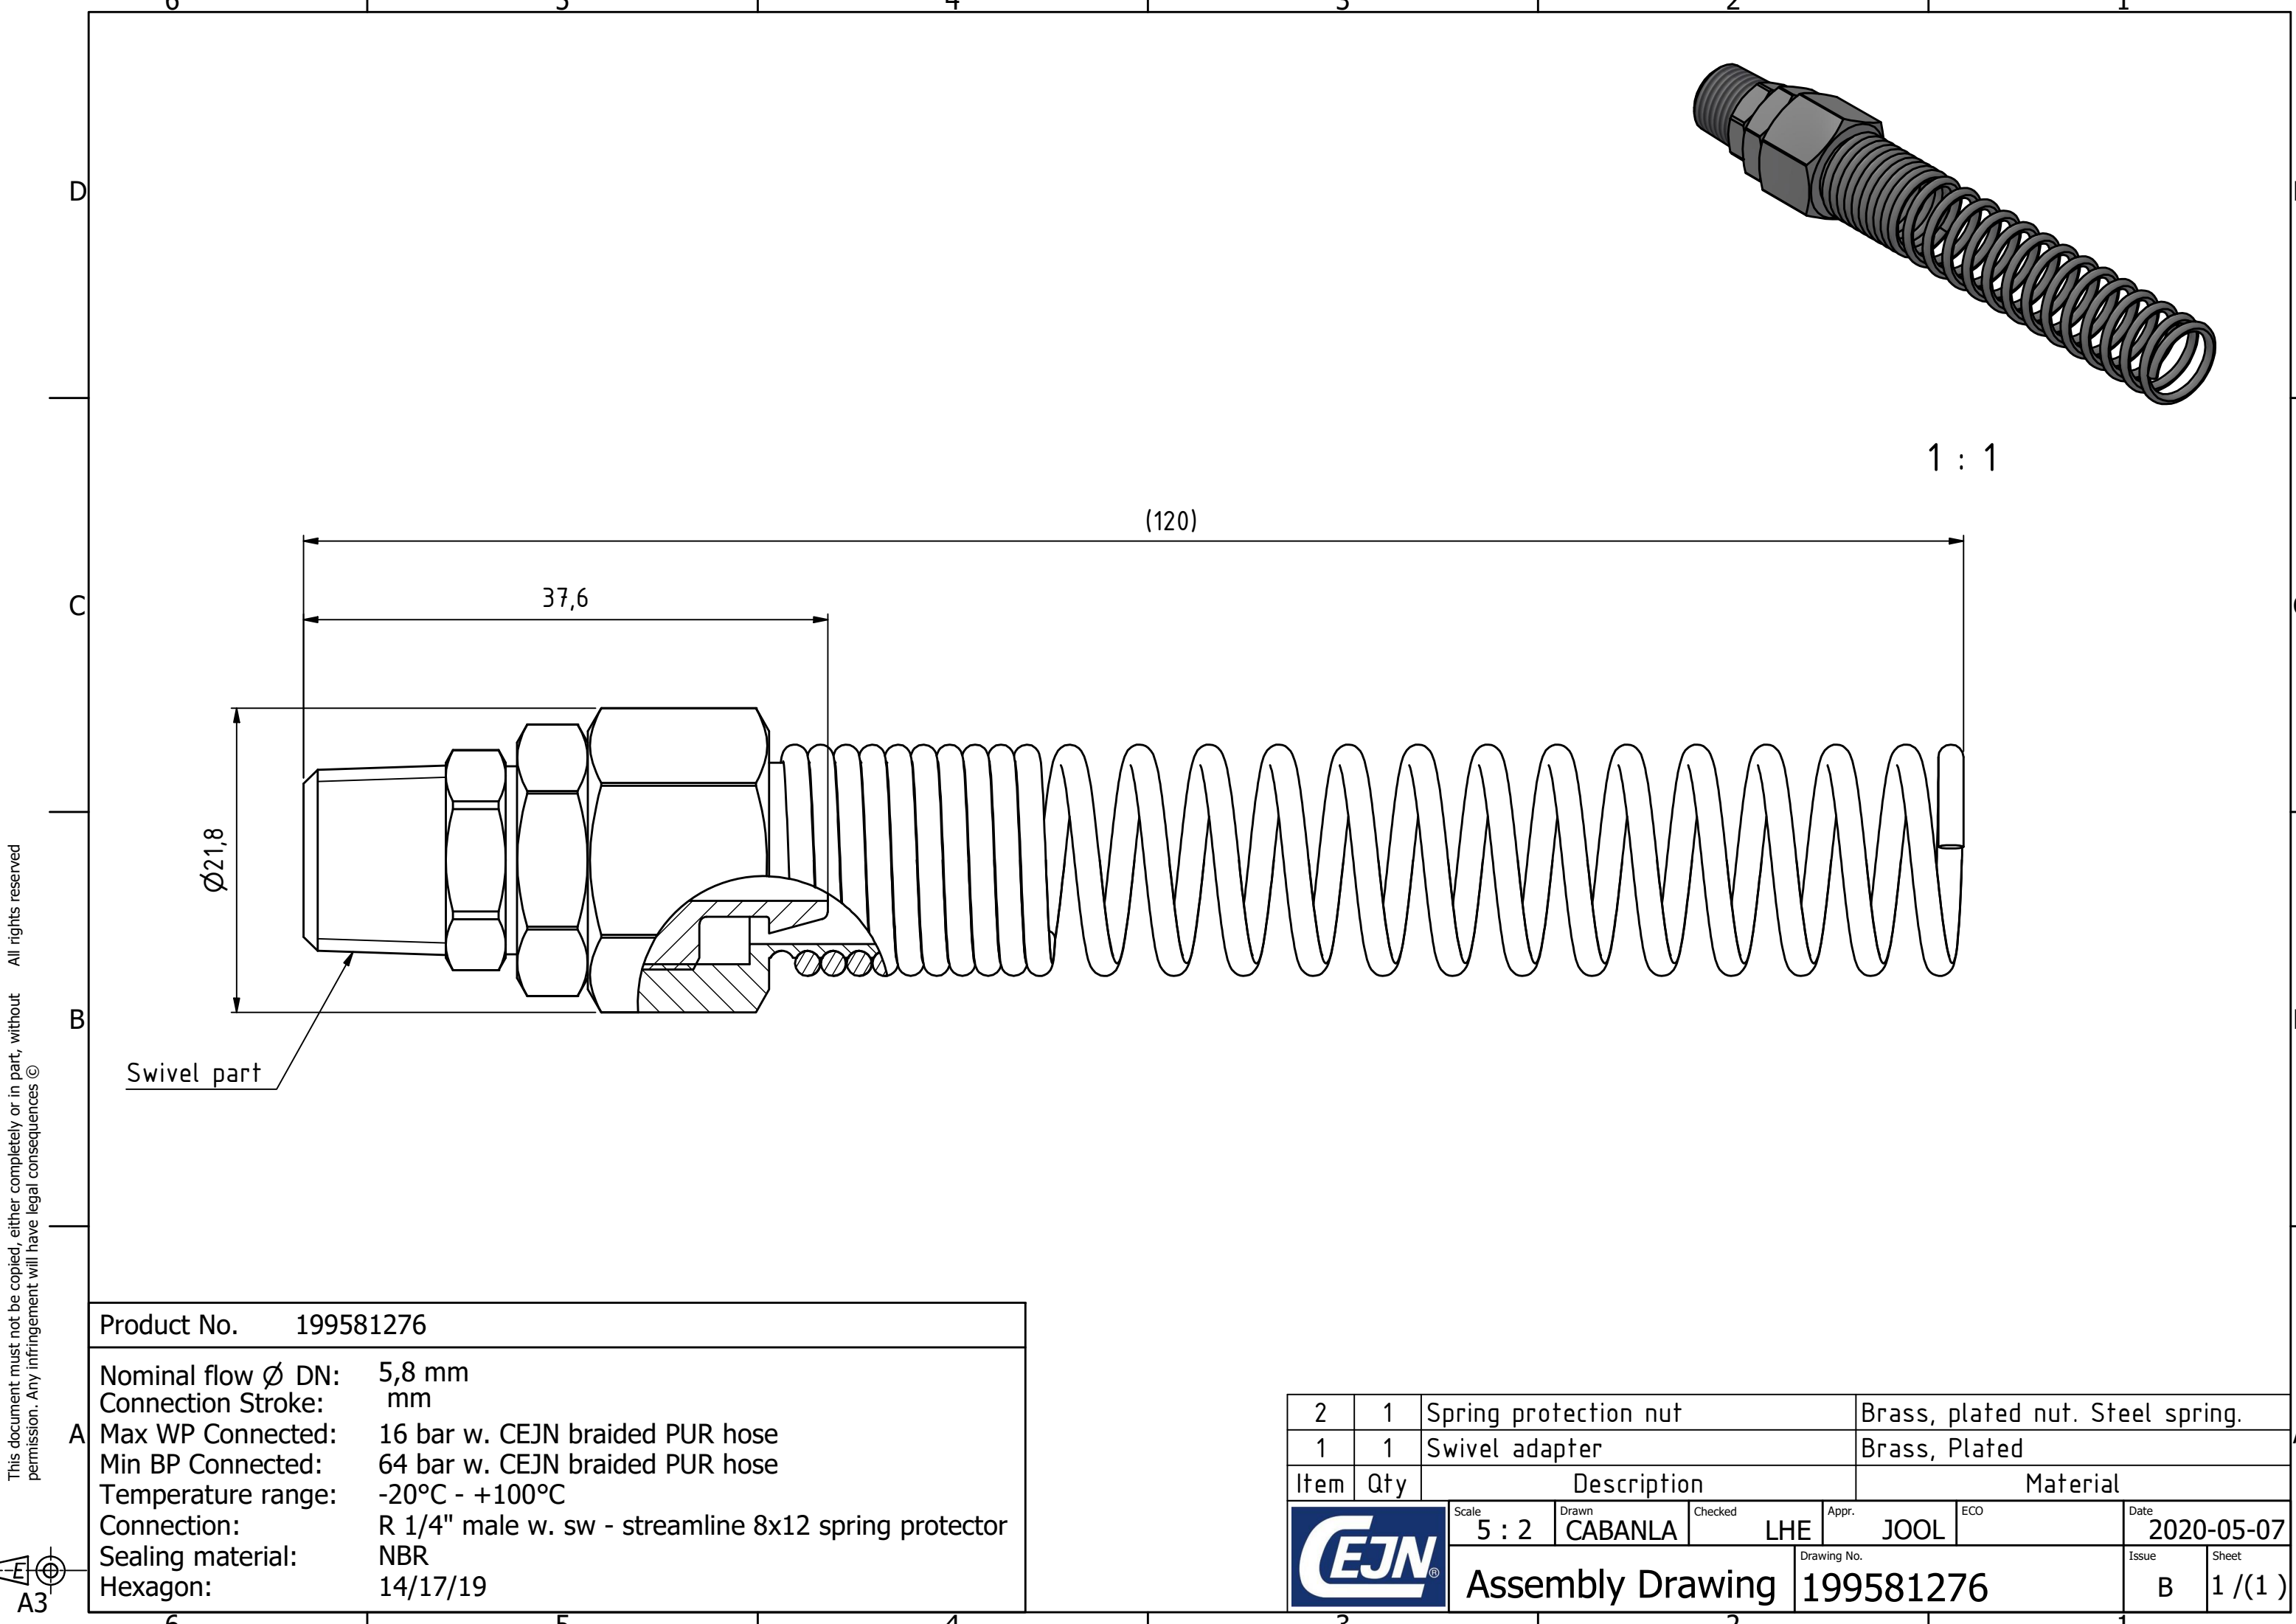

Product No. 199581276	
Nominal flow Ø DN:	5,8 mm
Connection Stroke:	mm
Max WP Connected:	16 bar w. CEJN braided PUR hose
Min BP Connected:	64 bar w. CEJN braided PUR hose
Temperature range:	-20°C - +100°C
Connection:	R 1/4" male w. sw - streamline 8x12 spring protector
Sealing material:	NBR
Hexagon:	14/17/19

2	1	Spring protection nut			Brass, plated nut. Steel spring.										
1	1	Swivel adapter			Brass, Plated										
Item	Qty	Description			Material										
		Scale	5 : 2	Drawn	CABANLA	Checked	LHE	Appr.	JOOL	ECO	Date	2020-05-07			
		Assembly Drawing							Drawing No.		199581276	Issue	B	Sheet	1 /(1)