

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D


C

B

A

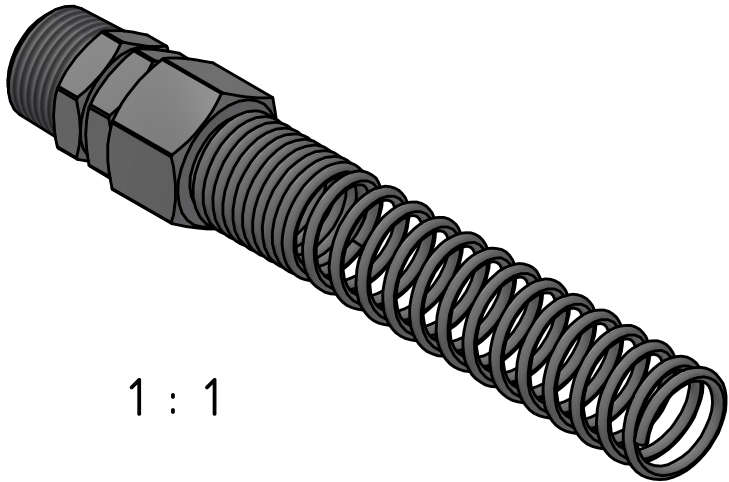

1 : 1

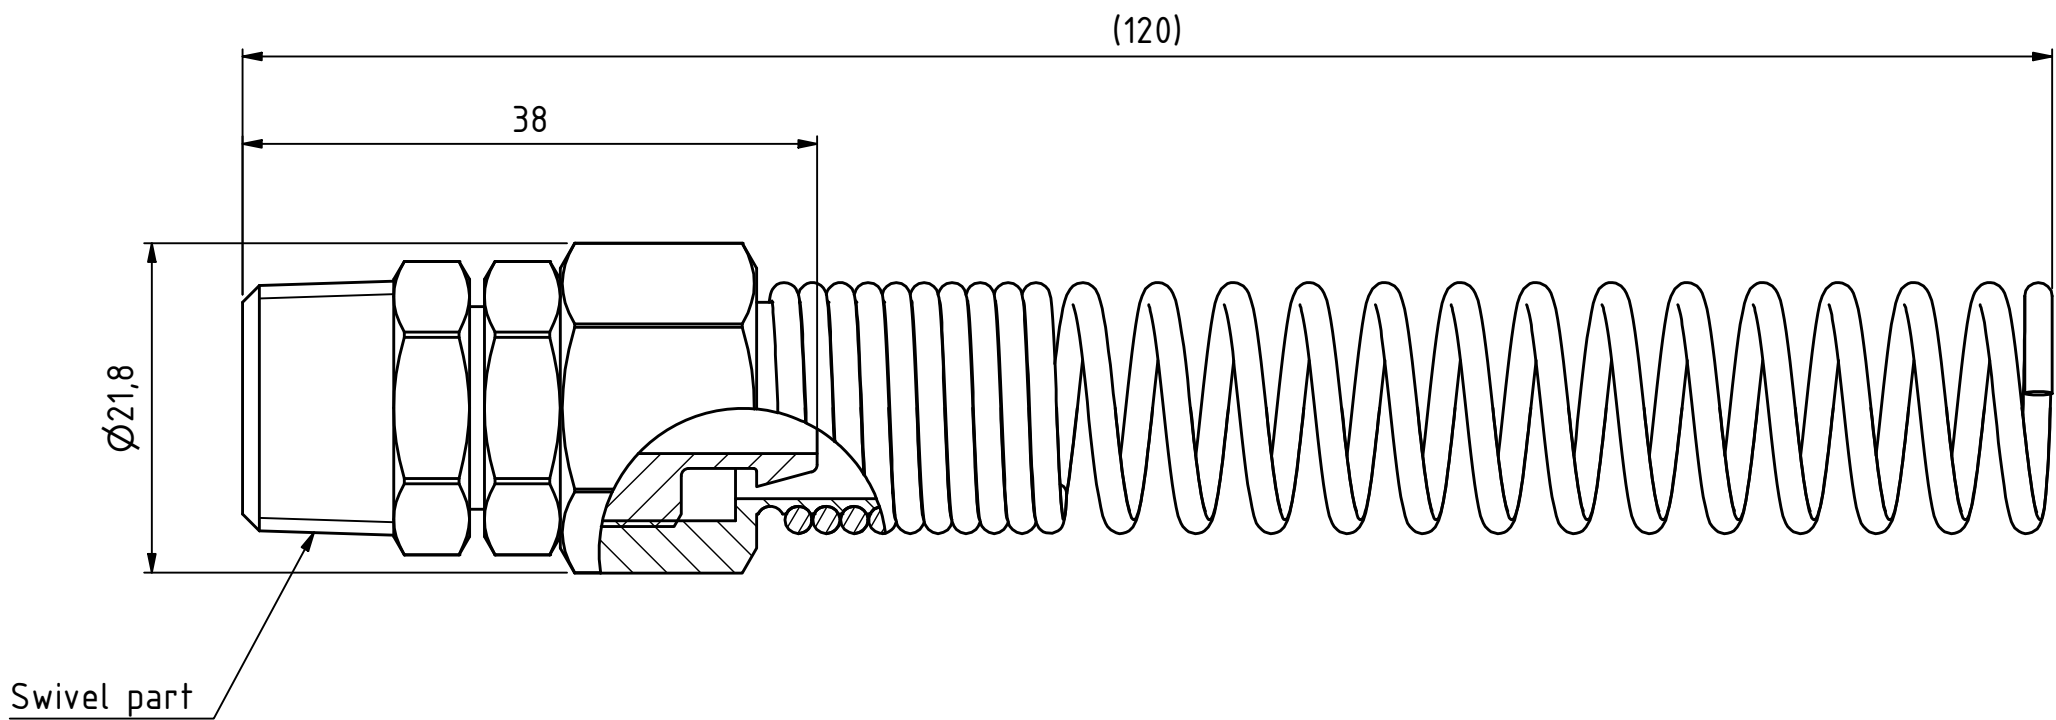

Product No. 199581278	
Nominal flow $\varnothing$ DN:	6 mm
Connection Stroke:	mm
Max WP Connected:	16 bar w. CEJN braided PUR hose
Min BP Connected:	64 bar w. CEJN braided PUR hose
Temperature range:	-20°C - +100°C
Connection:	R 3/8" male w. sw - streamline 8x12 spring protector
Sealing material:	NBR
Hexagon:	17(2x) /19

2	1	Spring protection nut			Brass, plated nut. Steel spring.								
1	1	Swivel adapter			Brass, Plated								
Item	Qty	Description			Material								
		Scale	2 : 1	Drawn	CABANLA	Checked	LHE	Appr.	JOOL	ECO	Date	2020-05-07	
		Assembly Drawing					Drawing No.				199581278	Issue	B

Assembly Drawing