


AR20(*)-B to AR60(*)-B, Regulator & Regulator w/Backflow Function AR30K-F03H-1-B

Datasheet

Cost effective and clean looking, series AR-B regulators offer various pressure range settings to accommodate most applications. The locking adjustment knob prevents accidental setting changes. The modular design of the AR series connects with other SMC air preparation equipment.





Pressure control valve, relieving pressure regulator, adjustable

Standard specifications

Made to Order 1	None
Body Size	30
Backflow Function	K (w/Backflow Function)
Thread	F (G)
Port	03 (3/8)
Option	H (w/Set Nut, for Panel Mount)
Semi-standard	1 (Set Pressure: 0.02 to 0.2 MPa)
Made to Order 2	None
Pressure medium	Air
Maximum temperature of pressure medium	60 °C
Minimum temperature of pressure medium	-5 °C [with no freezing]
Maximum operating pressure	1.0 MPa
Proof pressure	1.5 MPa
Maximum ambient temperature	60 °C
Minimum ambient temperature	-5 °C [with no freezing]
Conform to the European RoHS Directive	Conform
Approvals	No need
Weight	0.298 Kg

Dimensions

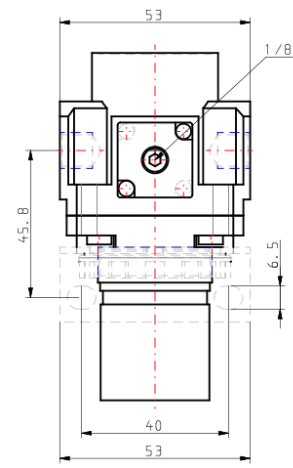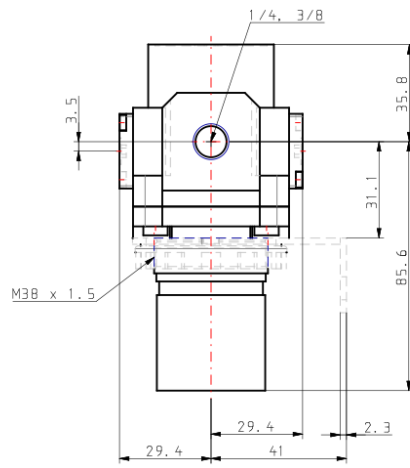

Additional information

Catalogue

[AC-B-B_EU.pdf](#)