

C(D)85, ISO Standard Cylinder, Double Acting, Single Rod C85N10-100

Datasheet

General series information

- Double acting, single rod, crimped cylinder
- Conforms to ISO 6432 and CETOP RP52P
- Bore sizes (mm): 8, 10, 12, 16, 20, 25
- Standard strokes up to 300mm
- Auto switch capable



Double-acting, single-rod cylinder


Standard specifications

Magnet	None
Mounting	N (Basic Integrated Clevis)
Bore Size	Ø10 mm
Stroke	100
Cushion	Rubber Cushion
Rod Boot	None
Auto Switch Mounting Type	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	0.5m (Or None in the Case of No Switch)
Number	2 pcs. (Or None in the Case of No Switch)
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Stainless Steel	None
Long Stroke	None
Pressure medium	Compressed Air
Maximum temperature of pressure medium	80 °C
Maximum temperature of pressure medium with magnet	60 °C


Minimum temperature of pressure medium	-20 °C [without condensation]
Minimum temperature of pressure medium with magnet	-10 °C [without condensation]
Maximum operating pressure	1 MPa
Minimum operating pressure	0.08 MPa
Proof pressure	1.5 MPa
Maximum ambient temperature	80 °C
Maximum ambient temperature with magnet	60 °C
Minimum ambient temperature	-20 °C
Minimum ambient temperature with magnet	-10 °C
Number of pneumatic connections	2 pcs.
Pneumatic input connection	M5
Pneumatic output connection	M5
Mode of operation of drive	Double acting
Theoretical cylinder force, advance stroke (at 0.5 MPa)	39.3 N
Theoretical cylinder force, return stroke (at 0.5 MPa)	33.0 N
Maximum piston speed	1,500 mm/s
Type of cushioning	Rubber bumper
Piston rod end	External thread
Geometric form of the piston rod	Single rod
Male thread of rod end	M4
Usable tubing material	Soft nylon;Nylon;Polyurethane
Minimum piston speed	50 mm/s
Weight	0.081 Kg

Dimensions


振動・片口ッド
ラバークッション：C□BSN チューブ内蔵 ストローク □
磁石なし／磁石内蔵 XG+ストローク

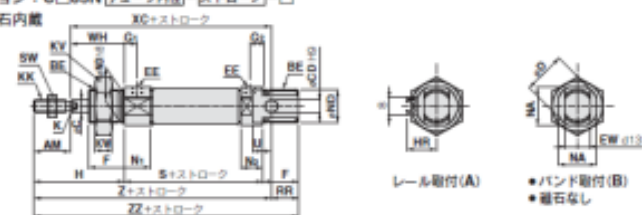

エアクション：C□85N チューブ内蔵 - ストローク C - □
磁石なし/磁石内蔵 $\xrightarrow{\text{XC + ストローク}}$

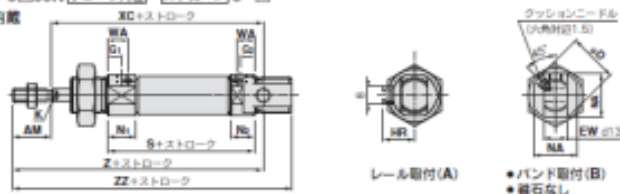

ジャバラ付

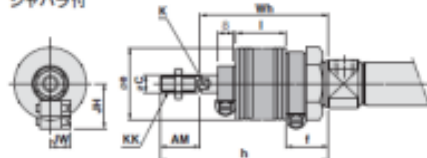

寸注表

时次	站名	BE	C	CS	D	EE	F	G	G1	G2	H	HR	K	KA	KK	KXV	N1	N2	NA	NC	S	SW	U	WA	HC	Z	ZZ				
8	12	WSX	1.25	4	16.7	WSX	0.8	0.12	7	5	28	10	-	4.2	Max	0.7	19	6	11.5	9.5	15	12	10	46	7	6	-	10	64	76	86
10	12	WSX	1.25	4	16.7	WSX	0.8	0.12	7	5	28	10.5	-	4.2	Max	0.7	19	6	11.5	9.5	15	12	10	46	7	6	10.5	16	64	76	86
12	16	M16	1.5	6	19.7	M50	0.8	1.2	17	5	36	14	-	6.2	Max	1	24	8	13.5	13.2	18.2	16	10	9	9.5	22	82	96	110	130	
16	16	M16	1.5	6	19.7	M50	0.8	1.2	17	5	36	14	-	6.2	Max	1	24	8	13.5	13.2	18.2	16	10	9	9.5	22	82	96	110	130	
20	20	M20	1.5	8	20.8	G	1.6	16	20	8	44	17	6	8.2	Max	1.25	32	11	15.5	17.5	17.6	22	11	62	13	12	13	94	95	115	126
24	24	M24	1.5	10	21.8	G	1.6	16	20	8	44	17	6	8.2	Max	1.25	32	11	15.5	17.5	17.6	22	11	62	13	12	13	94	95	115	126

〔 〕内はエアクッションの割合

ジャバラ付

ジャバラ付											(mm)										
2-1=2		2-10=9		2-18=17		2-26=25		2-34=33		2-42=41		2-50=49		2-58=57		2-66=65		2-74=73		2-82=81	
20	25	AM	C	e	f	K	KK			1-50	51-100	101-150	151-200	201-250	251-300	301-400	401-500				
20	25	20	8	36	20	6	M8×1.25	71	84	96	109	134	169	—	—	—	—				
25	25	22	10	36	20	8	M10×1.25	74	87	99	112	137	162	—	—	—	—				

Constructions

Double acting: Single rod

C□85□8 to16 Rubber bumper (Disassembly is not possible)



Component Parts

No.	Description	Material	Quantity	Remarks
①	Rod cover	Aluminum alloy	1	White anodized
②A	Head cover N	Aluminum alloy	1	White anodized
②B	Head cover E	Aluminum alloy	1	White anodized
②C	Head cover F	Aluminum alloy	1	White anodized
②D	Head cover Y	Aluminum alloy	1	White anodized
③	Cylinder tube	Stainless steel	1	
④	Piston rod	Stainless steel	1	
⑤A	Piston A	Brass	1	
⑤B	Piston B	Brass	2	(Switch style piston)

No.	Description	Material	Quantity	Remarks
⑥	Bushing	Sintered bronze	1	
⑦	Magnet		1	(Switch style only)
⑧	Bumper	Urethane	2	
⑨	Piston gasket	NBR	1	(2 for switch style)
⑩	Tube gasket	NBR	2	
⑪	Rod seal	NBR	1	
⑫	Piston seal	NBR	2	
⑬	Rod end nut	Carbon steel	1	Nickel plated
⑭	Mounting nut	Carbon steel	1	Nickel plated

Additional information

Catalogue

[C85_C75-A_EU.pdf](#)