

C(D)85, ISO Standard Cylinder, Double Acting, Single Rod C85N10-25C

Datasheet

General series information

- Double acting, single rod, crimped cylinder
- Conforms to ISO 6432 and CETOP RP52P
- Bore sizes (mm): 8, 10, 12, 16, 20, 25
- Standard strokes up to 300mm
- Auto switch capable




*Double-acting cylinder with cushioning
adjustable at both ends, single piston rod*

Standard specifications

Magnet	None
Mounting	N (Basic Integrated Clevis)
Bore Size	Ø10 mm
Stroke	25
Cushion	C (Air Cushion)
Rod Boot	None
Auto Switch Mounting Type	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	0.5m (Or None in the Case of No Switch)
Number	2 pcs. (Or None in the Case of No Switch)
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Stainless Steel	None
Long Stroke	None
Pressure medium	Compressed Air
Maximum temperature of pressure medium	80 °C
Maximum temperature of pressure medium with magnet	60 °C

Minimum temperature of pressure medium	-20 °C [without condensation]
Minimum temperature of pressure medium with magnet	-10 °C [without condensation]
Maximum operating pressure	1 MPa
Minimum operating pressure	0.08 MPa
Proof pressure	1.5 MPa
Maximum ambient temperature	80 °C
Maximum ambient temperature with magnet	60 °C
Minimum ambient temperature	-20 °C
Minimum ambient temperature with magnet	-10 °C
Number of pneumatic connections	2 pcs.
Pneumatic input connection	M5
Pneumatic output connection	M5
Mode of operation of drive	Double acting
Theoretical cylinder force, advance stroke (at 0.5 MPa)	39.3 N
Theoretical cylinder force, return stroke (at 0.5 MPa)	33.0 N
Maximum piston speed	1,500 mm/s
Type of cushioning	Air cushion
Piston rod end	External thread
Geometric form of the piston rod	Single rod
Male thread of rod end	M4
Usable tubing material	Soft nylon;Nylon;Polyurethane
Minimum piston speed	50 mm/s
Weight	0.057 Kg

Dimensions

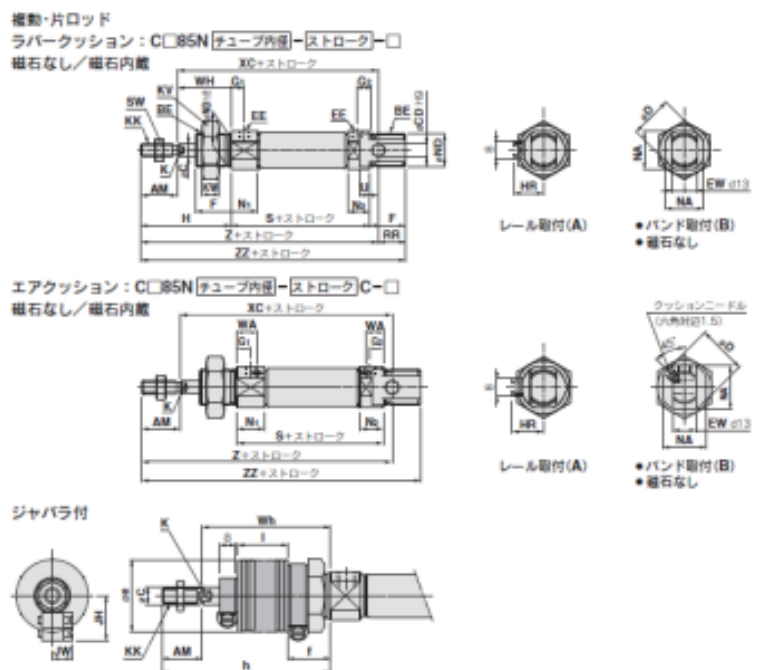

寸法表 (mm)

シリーズ	AM	BE	C	CO	D	EE	EW	F	G ₁	G ₂	H	HR	K	KA	KK	KV	KN	N ₁	N ₂	NA	NC	PR	S	SW	U	WA	WH	XC	Z	ZZ
8	12	M2×1.25	4	4	16.1	M5×0.8	8	12	7	5	26	10	—	4.2	M4×0.7	19	6	11.5	9.5	15	12	10	46	7	6	—	16	64	76	86
10	12	M2×1.25	4	4	16.1	M5×0.8	8	12	7	5	26	10.5	—	4.2	M4×0.7	19	6	11.5	9.5	15	12	10	46	7	6	—	16	64	76	86
12	16	M16×1.5	6	6	19.7	M5×0.8	12	17	8	10	36	14	5	6.2	M5×1	24	8	13.5	10.5	18.2	16	14	50	10	9	9.5	75	91	105	109
16	16	M16×1.5	6	6	19.7	M5×0.8	12	17	8	10	36	14	5	6.2	M5×1	24	8	13.5	10.5	18.2	16	14	50	10	9	9.5	75	91	105	109
20	20	M22×1.5	8	8	28	G 1/8	16	20	8	8	44	17	6	8.2	M6×1.25	32	11	15	17	24	22	11	62	13	12	13	24	95	115	126
25	25	M22×1.5	8	8	28	G 1/8	16	20	8	8	44	17	6	8.2	M6×1.25	32	11	15	17	24	22	11	66	13	12	13	28	104	126	137

()内はエアクッションの寸法。

ジャバラ付 (mm)

シリーズ	AM	C	e	f	K	KK	h
8-10	20	8	36	20	6	M6×1.25	71
20	22	10	36	20	8	M10×1.25	74

シリーズ	1-50	51-100	101-150	151-200	201-300	301-400	401-500
20	12.5	25	37.5	50	75	100	—
25	12.5	25	37.5	50	75	100	125

シリーズ	1-50	51-100	101-150	151-200	201-300	301-400	401-500
20	12.5	25	37.5	50	75	100	—
25	12.5	25	37.5	50	75	100	125

Constructions

Double acting: Single rod

C□85□10 to 16 Air cushion (Disassembly is not possible)



Component Parts

No.	Description	Material	Quantity	Remarks
①	Rod cover	Aluminum alloy	1	White anodized
②	Head cover N	Aluminum alloy	1	White anodized
③	Cylinder tube	Stainless steel	1	
④	Piston rod	Stainless steel	1	
⑤A	Piston A	Brass	1	
⑤B	Piston B	Brass	2	(Switch style piston)
⑥	Bush	Sintered bronze	1	
⑦	Cushion needle	Stainless steel	2	
⑧	Steel ball	Bearing steel	2	

No.	Description	Material	Quantity	Remarks
⑨	Cushion ring	Brass	2	
⑩	Magnet		1	
⑪	Mounting nut	Carbon steel	1	Nickel plated
⑫	Tube gasket	NBR	2	
⑬	Rod seal	NBR	1	
⑭	Piston seal	NBR	2	
⑮	Check seal	NBR	2	
⑯	Piston gasket & cushion ring gasket	NBR	3	
⑰	Needle seal	NBR	2	
⑱	Rod end nut	Carbon steel	1	Nickel plated

Additional information

Catalogue

[C85_C75-A_EU.pdf](#)