


C(D)85, ISO Standard Cylinder, Double Acting, Single Rod C85N10-40C

Datasheet

General series information

- Double acting, single rod, crimped cylinder
- Conforms to ISO 6432 and CETOP RP52P
- Bore sizes (mm): 8, 10, 12, 16, 20, 25
- Standard strokes up to 300mm
- Auto switch capable




*Double-acting cylinder with cushioning
adjustable at both ends, single piston rod*

Standard specifications

Magnet	None
Mounting	N (Basic Integrated Clevis)
Bore Size	Ø10 mm
Stroke	40
Cushion	C (Air Cushion)
Rod Boot	None
Auto Switch Mounting Type	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	0.5m (Or None in the Case of No Switch)
Number	2 pcs. (Or None in the Case of No Switch)
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Stainless Steel	None
Long Stroke	None
Pressure medium	Compressed Air
Maximum temperature of pressure medium	80 °C
Maximum temperature of pressure medium with magnet	60 °C

Minimum temperature of pressure medium	-20 °C [without condensation]
Minimum temperature of pressure medium with magnet	-10 °C [without condensation]
Maximum operating pressure	1 MPa
Minimum operating pressure	0.08 MPa
Proof pressure	1.5 MPa
Maximum ambient temperature	80 °C
Maximum ambient temperature with magnet	60 °C
Minimum ambient temperature	-20 °C
Minimum ambient temperature with magnet	-10 °C
Number of pneumatic connections	2 pcs.
Pneumatic input connection	M5
Pneumatic output connection	M5
Mode of operation of drive	Double acting
Theoretical cylinder force, advance stroke (at 0.5 MPa)	39.3 N
Theoretical cylinder force, return stroke (at 0.5 MPa)	33.0 N
Maximum piston speed	1,500 mm/s
Type of cushioning	Air cushion
Piston rod end	External thread
Geometric form of the piston rod	Single rod
Male thread of rod end	M4
Usable tubing material	Soft nylon;Nylon;Polyurethane
Minimum piston speed	50 mm/s
Weight	0.062 Kg

Dimensions

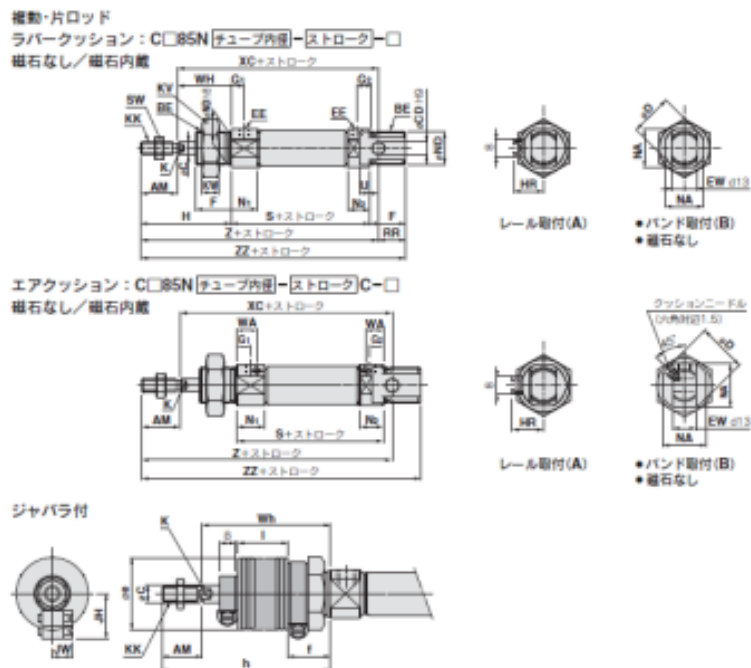

寸法表	AM	BE	C	CO	D	EE	EW	F	G ₁	G ₂	H	HR	K	KA	KK	KV	N ₁	N ₂	NA	NC	PR	S	SW	U	WA	WH	XC	Z	ZZ	
8	12	M2×1.25	4	4	16.1	M5×0.8	8	12	7	5	26	10	—	4.2	M4×0.7	19	6	11.5	9.5	15	12	10	46	7	6	—	16	64	76	86
10	12	M2×1.25	4	4	16.1	M5×0.8	8	12	7	5	26	10.5	—	4.2	M4×0.7	19	6	11.5	9.5	15	12	10	46	7	6	—	16	64	76	86
12	16	M16×1.5	6	6	19.7	M5×0.8	12	17	10	10	36	14	5	6.2	M5×1	24	8	13.5	10.5	18.2	16	14	50	10	9	9.5	75	91	105	109
16	16	M16×1.5	6	6	19.7	M5×0.8	12	17	10	10	36	14	5	6.2	M5×1	24	8	13.5	10.5	18.2	16	14	50	10	9	9.5	75	91	105	109
20	20	M22×1.5	8	8	28	G 1/8	16	20	8	8	44	17	6	8.2	M6×1.25	32	11	15	17	24	22	11	62	13	12	24	95	115	126	137
25	25	M22×1.5	8	8	28	G 1/8	16	20	8	8	44	17	6	8.2	M6×1.25	32	11	15	17	24	22	11	66	13	12	24	104	126	137	147

()内はエアクッションの寸法。

ジャバラ付 (mm)

シリーズ	AM	C	e	f	K	KK	h
8	20	8	36	20	6	M6×1.25	71
10	22	10	36	20	8	M10×1.25	74

シリーズ	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
8	12.5	25	37.5	50	75	100	125	150	175	200	225	250	275	300	325	350	375	400	425	450	475	500	525	550	575	600	625	650	675	700	725	750	775	800	825	850	875	900	925	950	975	1000	1025	1050	1075	1100	1125	1150	1175	1200

Constructions

Double acting: Single rod

C□85□10 to 16 Air cushion (Disassembly is not possible)



Component Parts

No.	Description	Material	Quantity	Remarks
①	Rod cover	Aluminum alloy	1	White anodized
②	Head cover N	Aluminum alloy	1	White anodized
③	Cylinder tube	Stainless steel	1	
④	Piston rod	Stainless steel	1	
⑤A	Piston A	Brass	1	
⑤B	Piston B	Brass	2	(Switch style piston)
⑥	Bush	Sintered bronze	1	
⑦	Cushion needle	Stainless steel	2	
⑧	Steel ball	Bearing steel	2	

No.	Description	Material	Quantity	Remarks
⑨	Cushion ring	Brass	2	
⑩	Magnet		1	
⑪	Mounting nut	Carbon steel	1	Nickel plated
⑫	Tube gasket	NBR	2	
⑬	Rod seal	NBR	1	
⑭	Piston seal	NBR	2	
⑮	Check seal	NBR	2	
⑯	Piston gasket & cushion ring gasket	NBR	3	
⑰	Needle seal	NBR	2	
⑱	Rod end nut	Carbon steel	1	Nickel plated

Additional information

Catalogue

[C85_C75-A_EU.pdf](#)