

C(D)85, ISO Standard Cylinder, Double Acting, Single Rod C85N20-300C

Datasheet

General series information

- Double acting, single rod, crimped cylinder
- Conforms to ISO 6432 and CETOP RP52P
- Bore sizes (mm): 8, 10, 12, 16, 20, 25
- Standard strokes up to 300mm
- Auto switch capable




*Double-acting cylinder with cushioning
adjustable at both ends, single piston rod*

Standard specifications

Magnet	None
Mounting	N (Basic Integrated Clevis)
Bore Size	Ø20 mm
Stroke	300
Cushion	C (Air Cushion)
Rod Boot	None
Auto Switch Mounting Type	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	0.5m (Or None in the Case of No Switch)
Number	2 pcs. (Or None in the Case of No Switch)
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Stainless Steel	None
Long Stroke	None
Pressure medium	Compressed Air
Maximum temperature of pressure medium	80 °C
Maximum temperature of pressure medium with magnet	60 °C

Minimum temperature of pressure medium	-20 °C [without condensation]
Minimum temperature of pressure medium with magnet	-10 °C [without condensation]
Maximum operating pressure	1 MPa
Minimum operating pressure	0.05 MPa
Proof pressure	1.5 MPa
Maximum ambient temperature	80 °C
Maximum ambient temperature with magnet	60 °C
Minimum ambient temperature	-20 °C
Minimum ambient temperature with magnet	-10 °C
Number of pneumatic connections	2 pcs.
Pneumatic input connection	G 1/8
Pneumatic output connection	G 1/8
Mode of operation of drive	Double acting
Theoretical cylinder force, advance stroke (at 0.5 MPa)	157.1 N
Theoretical cylinder force, return stroke (at 0.5 MPa)	132.0 N
Maximum piston speed	1,500 mm/s
Type of cushioning	Air cushion
Piston rod end	External thread
Geometric form of the piston rod	Single rod
Male thread of rod end	M8
Usable tubing material	Soft nylon;Nylon;Polyurethane
Minimum piston speed	50 mm/s
Weight	0.557 Kg

Dimensions

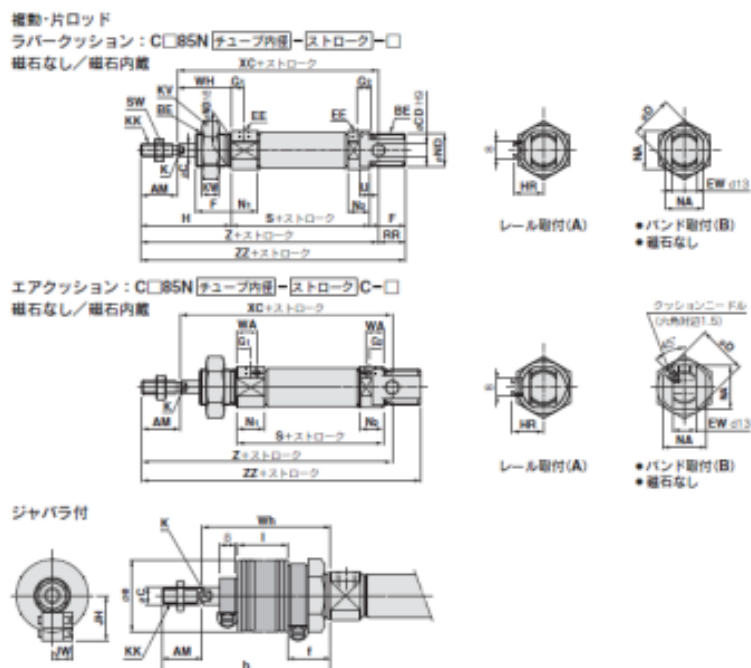

寸法表 (mm)																														
	AM	BE	C	CO	D	EE	EW	F	G ₁	G ₂	H	HR	K	KA	KK	KV	N ₁	N ₂	NA	NC	PR	S	SW	U	WA	WH	XC	Z	ZZ	
8	12	M2×1.25	4	4	16.1	M5×0.8	8	12	7	5	26	10	—	4.2	M4×0.7	19	6	11.5	9.5	15	12	10	46	7	6	—	16	64	76	86
10	12	M2×1.25	4	4	16.1	M5×0.8	8	12	7	5	26	10.5	—	4.2	M4×0.7	19	6	11.5	9.5	15	12	10	46	7	6	—	16	64	76	86
12	16	M16×1.5	6	6	19.7	M5×0.8	12	17	8	6	36	14	5	6.2	M5×1	24	8	13.5	10.5	18.2	16	14	50	10	9	9.5	27	75	91	105
16	16	M16×1.5	6	6	19.7	M5×0.8	12	17	8	6	36	14	5	6.2	M5×1	24	8	13.5	10.5	18.2	16	14	50	10	9	9.5	27	75	91	105
20	20	M22×1.5	8	8	28	G 1/8	16	20	8	8	44	17	6	8.2	M6×1.25	32	11	15	17	24	22	11	62	13	12	13	24	95	115	126
25	25	M22×1.5	8	8	28	G 1/8	16	20	8	8	44	17	6	8.2	M6×1.25	32	11	15	17	24	22	11	66	13	12	13	24	104	124	137

()内はエアクッションの寸法。

ジャバラ付 (mm)

シリーズ	AM	C	e	f	K	KK	h
8	20	8	36	20	6	M6×1.25	71
10	22	10	36	20	8	M10×1.25	74
12	20	8	36	20	6	M6×1.25	71
16	20	8	36	20	6	M6×1.25	71
20	20	8	36	20	6	M6×1.25	71
25	20	8	36	20	6	M6×1.25	71

h: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

1: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

2: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

3: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

4: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

5: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

6: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

7: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

8: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

9: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

10: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

11: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

12: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

13: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

14: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

15: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

16: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

17: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

18: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

19: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

20: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

21: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

22: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

23: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

24: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

25: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

26: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

27: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

28: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

29: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

30: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

31: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

32: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

33: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

34: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

35: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

36: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

37: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

38: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

39: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

40: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

41: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

42: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

43: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

44: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

45: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

46: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

47: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500


48: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

49: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

50: 1~50, 51~100, 101~150, 151~200, 201~300, 301~400, 401~500

Constructions

C□85□20, 25 Air cushion

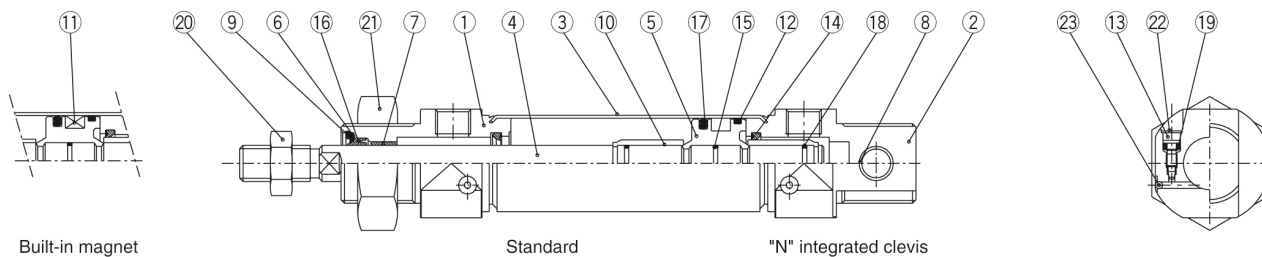

Component Parts

No.	Description	Material	Quantity	Remarks
①	Rod cover	Aluminum alloy	1	White anodized
②	Head cover N	Aluminum alloy	1	White anodized
③	Cylinder tube	Stainless steel	1	
④	Piston rod	Carbon steel	1	Hard chrome plated
⑤	Piston	Aluminum alloy	1	Chromated
⑥	Plain washer	Carbon steel	1	Nickel plated
⑦	Bushing	Sintered bronze	1	
⑧	Bushing	Sintered bronze	1	
⑨	Retaining ring	Carbon steel	1	Nickel plated
⑩	Cushion ring	Copper alloy	2	Hard chrome plated
⑪	Magnet		1	
⑫	Wear ring	Phenolic resin	1	

No.	Description	Material	Quantity	Remarks
⑬	Cushion valve	Carbon steel	2	Nickel plated
⑭	Cushion seal	Urethane	2	
⑮	Piston gasket	NBR	1	
⑯	Rod seal	NBR	1	
⑰	Piston seal	NBR	1	
⑱	Cushion ring gasket	NBR	2	
⑲	Cushion valve packing	NBR	2	
⑳	Rod end nut	Carbon steel	1	Nickel plated
㉑	Mounting nut	Carbon steel	1	Nickel plated
㉒	Self locking ring	Stainless steel	2	
㉓	Steel ball	Stainless steel	2	

Additional information

Catalogue

[C85_C75-A_EU.pdf](#)