


C(D)85, ISO Standard Cylinder, Double Acting, Single Rod C85N25-160C

Datasheet

General series information

- Double acting, single rod, crimped cylinder
- Conforms to ISO 6432 and CETOP RP52P
- Bore sizes (mm): 8, 10, 12, 16, 20, 25
- Standard strokes up to 300mm
- Auto switch capable



*Double-acting cylinder with cushioning
adjustable at both ends, single piston rod*

Standard specifications

Magnet	None
Mounting	N (Basic Integrated Clevis)
Bore Size	Ø25 mm
Stroke	160
Cushion	C (Air Cushion)
Rod Boot	None
Auto Switch Mounting Type	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	0.5m (Or None in the Case of No Switch)
Number	2 pcs. (Or None in the Case of No Switch)
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Stainless Steel	None
Long Stroke	None
Pressure medium	Compressed Air
Maximum temperature of pressure medium	80 °C
Maximum temperature of pressure medium with magnet	60 °C


Minimum temperature of pressure medium	-20 °C [without condensation]
Minimum temperature of pressure medium with magnet	-10 °C [without condensation]
Maximum operating pressure	1 MPa
Minimum operating pressure	0.05 MPa
Proof pressure	1.5 MPa
Maximum ambient temperature	80 °C
Maximum ambient temperature with magnet	60 °C
Minimum ambient temperature	-20 °C
Minimum ambient temperature with magnet	-10 °C
Number of pneumatic connections	2 pcs.
Pneumatic input connection	G 1/8
Pneumatic output connection	G 1/8
Mode of operation of drive	Double acting
Theoretical cylinder force, advance stroke (at 0.5 MPa)	245.5 N
Theoretical cylinder force, return stroke (at 0.5 MPa)	206.2 N
Maximum piston speed	1,500 mm/s
Type of cushioning	Air cushion
Piston rod end	External thread
Geometric form of the piston rod	Single rod
Male thread of rod end	M10 x 1.25
Usable tubing material	Soft nylon;Nylon;Polyurethane
Minimum piston speed	50 mm/s
Weight	0.580 Kg

Dimensions

複動・片ロッド


ラバークッション：C□85N チューブ内径 - ストローク - □

磁石なし/磁石内蔵

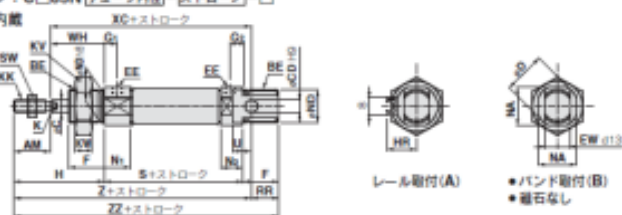


エアクッション：C□85N チューブ内径 - ストローク C-□

磁石なし/磁石内蔵

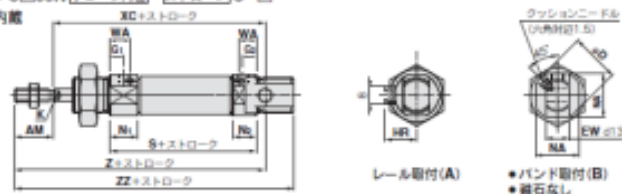

ジャバラ付

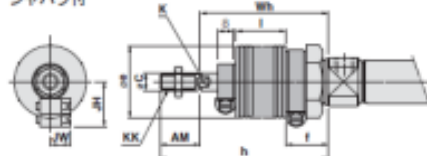

寸注表

寸法		(mm)																											
72	寸法	BE	C	D	E	F	G	G ₁	G ₂	H	HR	K	MA	KK	KX	N ₁	N ₂	NA	NR	S	SW	U	WA	XC	Z	ZZ			
8	12 M3X1.25	4	16	16	M5X0.8	8	12	7	5	28	10	—	4.2	M4X0.7	16	6	11.5	9.5	15	12	10	46	7	6	—	18	64	78	86
10	12 M3X1.25	4	16	16	M5X0.8	8	12	7	5	28	10.5	—	4.2	M4X0.7	16	6	11.5	9.5	15	12	10	46	7	6	10.5	16	64	78	86
12	16 M1X1.5	6	16	16	M5X0.8	8	12	7	5	30	14	—	6.2	M5X1	24	8	13.5	11.5	18.5	16	14	50	10	9	9.5	25	88	100	109
16	16 M1X1.5	6	16	16	M5X0.8	12	17	8	6	38	14	5	6.2	M5X1	24	8	13.5	11.5	18.5	16	14	50	10	9	9.5	25	88	100	109
20	20 M2X1.5	8	20	20	G 1/2	16	22	9	8	44	17	6	8.2	M6X1.25	32	11	15.5	13.5	22.5	21	16	62	12	10	12	34	95	115	126
25	25 M2X1.5	10	25	25	G 1/2	16	22	9	8	44	17	6	8.2	M6X1.25	32	11	15.5	13.5	22.5	21	16	62	12	10	12	34	95	115	126


()内はエアアクションの割合。

ジャバラ付

ジャバラ付										(mm)			
2-1=2 2-2=2	2-1=2		2-2=2		2-3=2		2-4=2		2-5=2		2-6=2		
	AM	C	e	f	K	KK	h						
20	70	8	36	20	6	M8×1.25	1~50	51~100	101~150	151~200	201~300	301~400	401~500
25	70	8	36	20	6	M10×1.25	71	84	96	109	134	159	—
25	22	10	36	20	6	M10×1.25	74	87	99	112	137	162	187

Constructions

C□85□20, 25 Air cushion

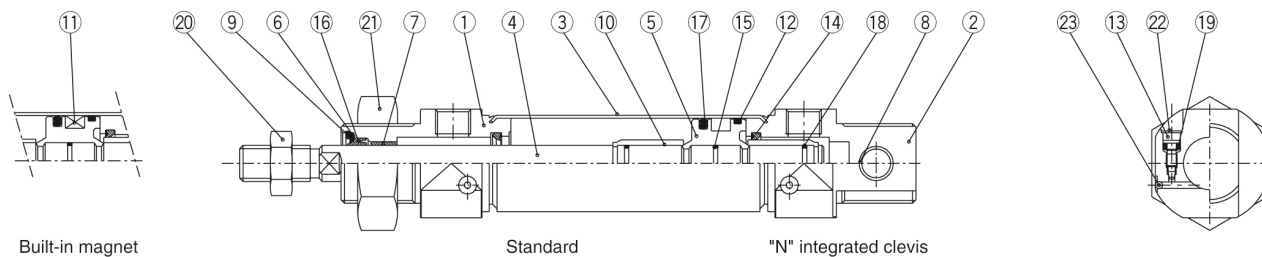

Component Parts

No.	Description	Material	Quantity	Remarks
①	Rod cover	Aluminum alloy	1	White anodized
②	Head cover N	Aluminum alloy	1	White anodized
③	Cylinder tube	Stainless steel	1	
④	Piston rod	Carbon steel	1	Hard chrome plated
⑤	Piston	Aluminum alloy	1	Chromated
⑥	Plain washer	Carbon steel	1	Nickel plated
⑦	Bushing	Sintered bronze	1	
⑧	Bushing	Sintered bronze	1	
⑨	Retaining ring	Carbon steel	1	Nickel plated
⑩	Cushion ring	Copper alloy	2	Hard chrome plated
⑪	Magnet		1	
⑫	Wear ring	Phenolic resin	1	

No.	Description	Material	Quantity	Remarks
⑬	Cushion valve	Carbon steel	2	Nickel plated
⑭	Cushion seal	Urethane	2	
⑮	Piston gasket	NBR	1	
⑯	Rod seal	NBR	1	
⑰	Piston seal	NBR	1	
⑱	Cushion ring gasket	NBR	2	
⑲	Cushion valve packing	NBR	2	
⑳	Rod end nut	Carbon steel	1	Nickel plated
㉑	Mounting nut	Carbon steel	1	Nickel plated
㉒	Self locking ring	Stainless steel	2	
㉓	Steel ball	Stainless steel	2	

Additional information

Catalogue

[C85_C75-A_EU.pdf](#)