


C(D)85K, ISO-Zylinder (ISO6432), doppeltwirkend, einseitige Kolbenstange, verdrehgesichert C85KN8-80

Technisches Datenblatt

- ISO 6432 Rundzylinder.
- Kolben-Ø (mm): 8, 10, 12, 16, 20, 25.
- Hübe bis 300 mm.
- Zylinder Varianten: mit Verriegelungseinheit, Direktmontage, ATEX.







Double-acting cylinder, non-rotating single
piston rod

Technische Daten

Magnet	Keine
Montage	N (Standard, integriertes Gegenlager)
Kolben-Ø	Ø8 mm
Hub	80
Signalgeber Montage	ohne Signalgeber
Signalgeber	ohne Signalgeber
Anschlusskabel oder vorverdrahteter Stecker	0.5 m (oder keine bei Ausführung ohne Signalgeber)
Anzahl	2 Stk. (oder keine bei Ausführung ohne Signalgeber)
Optionen Kolbenstangenende	Keine
Rostfreier Stahl	Keine
Langhub	Keine
Druckmedium	Druckluft
Maximale Medientemperatur	80 °C
Minimale Medientemperatur	-20 °C [nicht gefroren]
Minimale Temperatur des Druckmediums	-20 °C
Minimale Medientemperatur mit Magnet	-10 °C [nicht gefroren]
Maximaler Betriebsdruck	1 MPa
Minimaler Betriebsdruck	0.1 MPa
Prüfdruck	1.5 MPa
Maximale Umgebungstemperatur	80 °C


Minimale Umgebungstemperatur	-20 °C
Entspricht der EU RoHS Richtlinie	Konform
Anzahl pneumatischer Anschlüsse	2 Stk.
Pneumatischer Eingangsanschluss	M5
Pneumatischer Ausgangsanschluss	M5
Funktionsweise	Doppeltwirkend
Theoretische Zylinderkraft, Ausfahrhub (bei 0,5 MPa)	25.2 N
Theoretische Zylinderkraft, Einfahrhub (bei 0,5 MPa)	18.9 N
Maximale Kolbengeschwindigkeit	1500 mm/s
Ausführung der Dämpfung	Rubber bumper
Kolbenstangenende	Außengewinde
Geometrische Form der Kolbenstange	Einseitige Kolbenstange
Kolbenstangen-Außengewinde	M4
Verdrehtoleranz	$\pm 1^\circ 30'$
Gewicht	0.069 Kg

Abmessungen

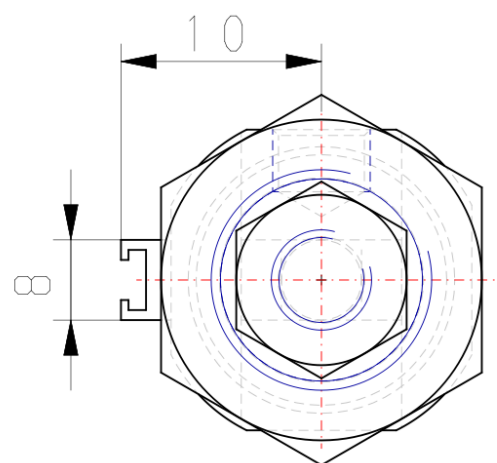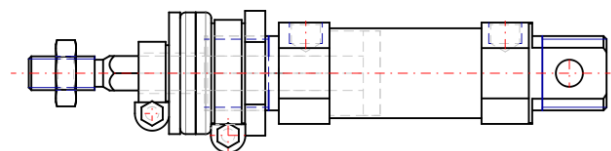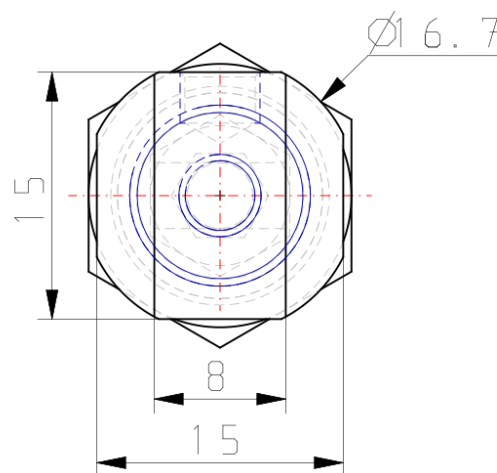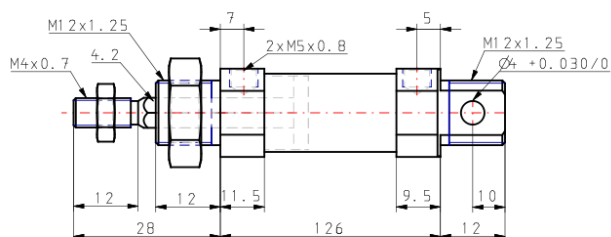

Konstruktion

Double acting: Single rod C□85□8 to16 Rubber bumper (Disassembly is not possible)

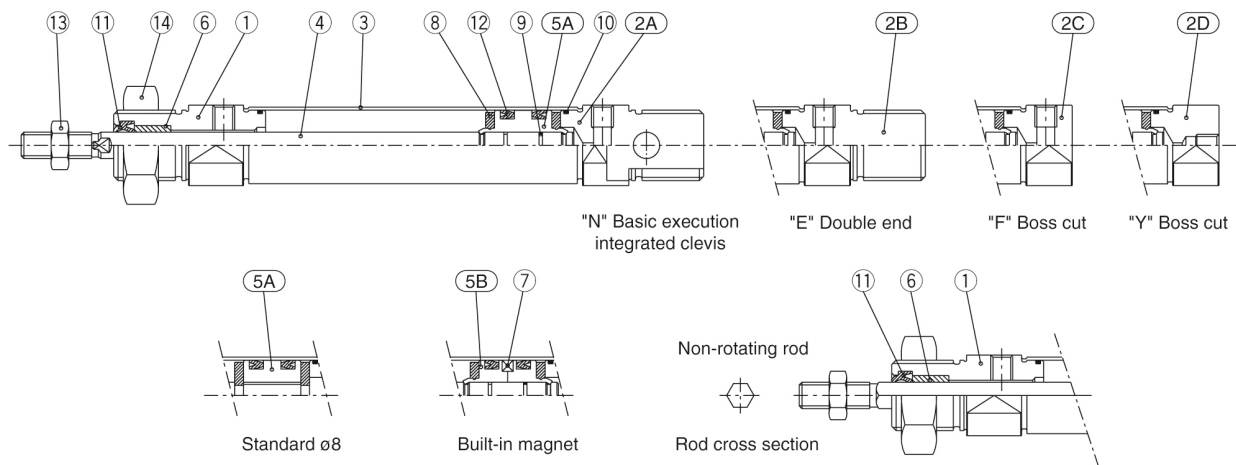


Component Parts

No.	Description	Material	Quantity	Remarks
①	Rod cover	Aluminum alloy	1	White anodized
②A	Head cover N	Aluminum alloy	1	White anodized
②B	Head cover E	Aluminum alloy	1	White anodized
②C	Head cover F	Aluminum alloy	1	White anodized
②D	Head cover Y	Aluminum alloy	1	White anodized
③	Cylinder tube	Stainless steel	1	
④	Piston rod	Stainless steel	1	
⑤A	Piston A	Brass	1	
⑤B	Piston B	Brass	2	(Switch style piston)

No.	Description	Material	Quantity	Remarks
⑥	Bushing	Sintered bronze	1	
⑦	Magnet		1	(Switch style only)
⑧	Bumper	Urethane	2	
⑨	Piston gasket	NBR	1	(2 for switch style)
⑩	Tube gasket	NBR	2	
⑪	Rod seal	NBR	1	
⑫	Piston seal	NBR	2	
⑬	Rod end nut	Carbon steel	1	Nickel plated
⑭	Mounting nut	Carbon steel	1	Nickel plated

Konstruktion

Double acting: Single rod
C□85□8 to16 Rubber bumper (Disassembly is not possible)

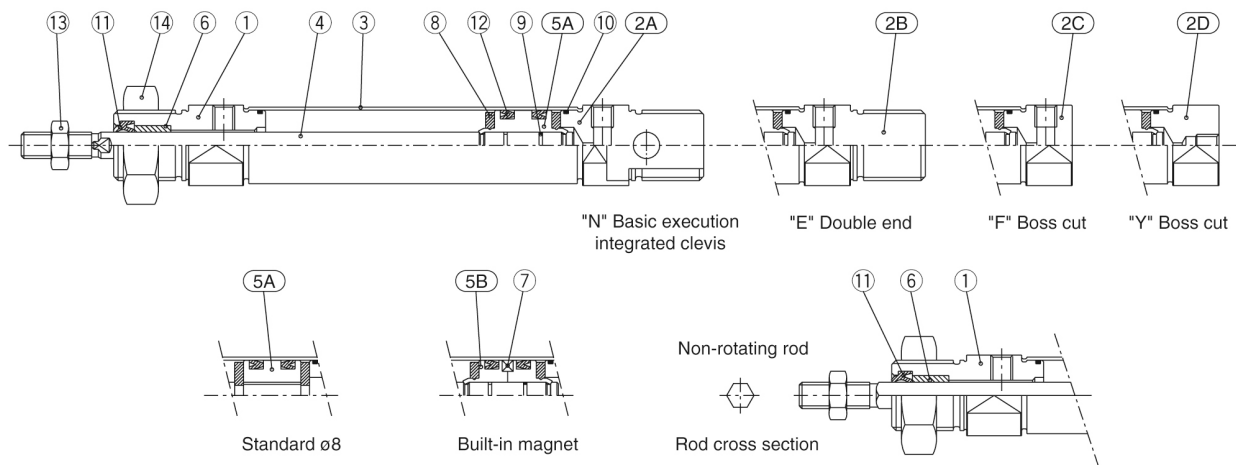

Component Parts

No.	Description	Material	Quantity	Remarks
①	Rod cover	Aluminum alloy	1	White anodized
②A	Head cover N	Aluminum alloy	1	White anodized
②B	Head cover E	Aluminum alloy	1	White anodized
②C	Head cover F	Aluminum alloy	1	White anodized
②D	Head cover Y	Aluminum alloy	1	White anodized
③	Cylinder tube	Stainless steel	1	
④	Piston rod	Stainless steel	1	
⑤A	Piston A	Brass	1	
⑤B	Piston B	Brass	2	(Switch style piston)

No.	Description	Material	Quantity	Remarks
⑥	Bushing	Sintered bronze	1	
⑦	Magnet		1	(Switch style only)
⑧	Bumper	Urethane	2	
⑨	Piston gasket	NBR	1	(2 for switch style)
⑩	Tube gasket	NBR	2	
⑪	Rod seal	NBR	1	
⑫	Piston seal	NBR	2	
⑬	Rod end nut	Carbon steel	1	Nickel plated
⑭	Mounting nut	Carbon steel	1	Nickel plated

Weitere Informationen

Katalog

[C85_C75-A_DE.pdf](#)