

## C(D)G5-S, Stainless Steel Cylinder, Double Acting, Single Rod CG5EN40TFSV-25

### Datasheet

### General series information

- Double acting, single rod CG5-S cylinder
- All stainless steel external parts
- Special scraper prevents water from entering cylinder
- Bore sizes (mm): 20, 25, 32, 40, 50, 63, 80 and 100
- Auto switch capability



Double-acting, single-rod cylinder


### Standard specifications

|                                        |                                           |
|----------------------------------------|-------------------------------------------|
| Magnet                                 | None                                      |
| Mounting                               | E (Integral Clevis)                       |
| Style                                  | N (Non-lube Rubber Cushion)               |
| Bore Size                              | 40mm                                      |
| Thread                                 | TF (G Ports)                              |
| Seal Material                          | V (FKM)                                   |
| Stroke                                 | 25                                        |
| Auto Switch                            | None                                      |
| Lead Wire or Prewired Connector        | 0.5m (Or None in the Case of No Switch)   |
| Number                                 | 2 pcs. (Or None in the Case of No Switch) |
| Rod End Options                        | None                                      |
| Temperature Resistance                 | None                                      |
| Pressure medium                        | Air                                       |
| Maximum temperature of pressure medium | 70 °C                                     |
| Minimum temperature of pressure medium | -10 °C                                    |
| Maximum operating pressure             | 1.0 MPa                                   |
| Minimum operating pressure             | 0.05 MPa                                  |
| Proof pressure                         | 1.5 MPa                                   |


|                                  |                  |
|----------------------------------|------------------|
| Maximum ambient temperature      | 70 °C            |
| Minimum ambient temperature      | -10 °C           |
| Number of pneumatic connections  | 2 pcs.           |
| Pneumatic input connection       | G 1/8            |
| Mode of operation of drive       | Double acting    |
| Maximum piston speed             | 1000 mm/s        |
| Piston rod end                   | External thread  |
| Geometric form of the piston rod | Round piston rod |
| Male thread of rod end           | M14 x 1.5        |
| Minimum piston speed             | 50 mm/s          |
| Weight                           | 1.300 Kg         |

## Dimensions


クレビス型形(E)/C□G5E<sup>N</sup><sub>A</sub>□S<sup>R</sup><sub>V</sub>

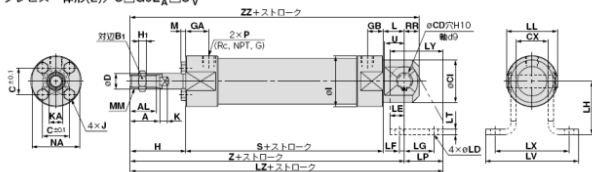


ヘッド側フランジ形(G)/C□G5G<sup>N</sup><sub>A</sub>□S<sup>R</sup><sub>V</sub>

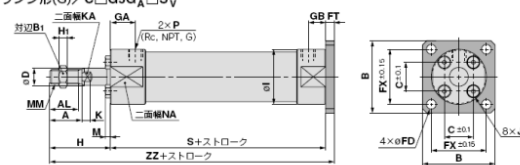


軸方向フート形(L)/C□G5L<sup>N</sup><sub>A</sub>□S<sup>R</sup><sub>V</sub>

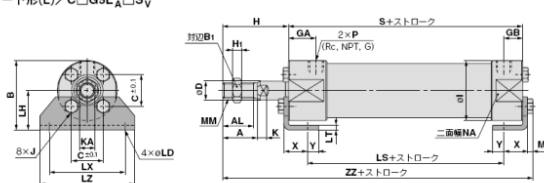


基本形(B)/C□G5BN□S<sup>R</sup><sub>V</sub>: ラバークッション付

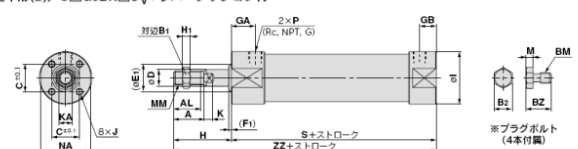

基本形(B)/C□G5BA□S<sup>R</sup><sub>V</sub>: エアクッション付

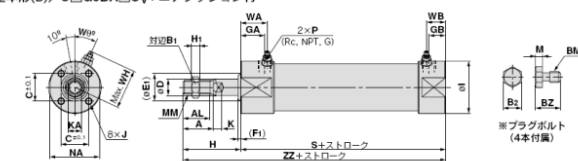

ロッド側フランジ形(F)/C□G5F<sup>N</sup><sub>A</sub>□S<sup>R</sup><sub>V</sub>

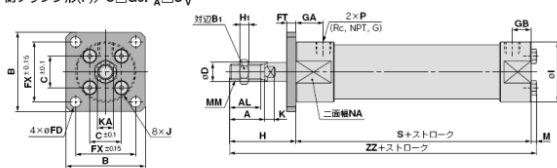

Constructions

Construction

With rubber bumper



Component Parts

| No. | Description   | Material            |                    |
|-----|---------------|---------------------|--------------------|
| 1   | Rod cover     | Stainless steel 304 |                    |
| 2   | Head cover    | Stainless steel 304 |                    |
| 3   | Cylinder tube | Stainless steel 304 |                    |
| 4   | Piston rod    | Stainless steel 304 | Hard chrome plated |
| 5   | Bumper        | Urethane            |                    |
| 6   | Rod end nut   | Stainless steel 304 |                    |
| 17  | Bushing       | Bearing alloy       |                    |
| 18  | Piston        | Aluminium alloy     |                    |
| 19  | Wearing       | Resin               |                    |

Note 1) Component part material and surface treatment other than listed above are the same as the standard type of Series CG1.  
Note 2) For cylinders with an auto switch, the piston is fixed with a magnet.

| No. | Description             | Material |          |
|-----|-------------------------|----------|----------|
|     |                         | CG5□□□SR | CG5□□□SV |
| 8   | Water resistant scraper | NBR      | FKM      |
| 9   | Rod seal                |          |          |
| 10  | Piston seal             |          |          |
| 21  | Piston gasket           |          |          |
| 13  | Label protector         | PET      |          |

## Additional information

Catalogue

[CJ5-CG5-B\\_EU.pdf](#)