


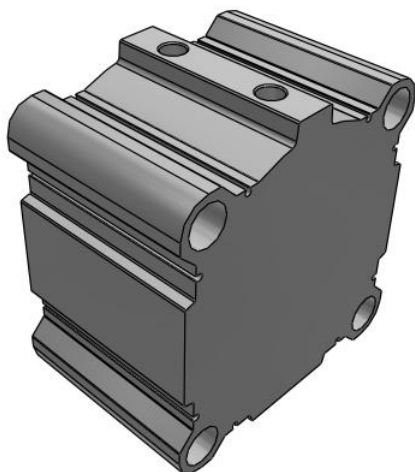

C(D)Q2, Compact Cylinder, Double Acting, Single Rod, Large Bore w/Auto Switch Mounting Groove

CDQ2B160TF-30DCMZ

Datasheet

General series information

- Compact, double acting, single rod, large bore
- Bore sizes (mm): 125, 140, 160, 180, 200
- Standard stroke range (mm): 10 to 300
- Port threads: Rc, NPT, G
- Can mount small auto switches on 4 surfaces.



Double-acting, single-rod cylinder

Standard specifications



Magnet	D (Built-in)
Bore Size	Ø160 mm
Port Thread Type	TF (G)
Stroke	30
Body Option	M (Rod End Male Thread)
Auto Switch	No Switch
Lead Wire or Prewired Connector	0.5 m or None in the Case of No Switch
Number	2 pcs.
Rod End Options	None
Fluororubber Seal	None
Pressure medium	Compressed air
Maximum temperature of pressure medium with magnet	60 °C
Minimum temperature of pressure medium with magnet	-10 °C
Maximum operating pressure	1.0 MPa
Minimum operating pressure	0.05 MPa
Proof pressure	1.5 MPa
Maximum ambient temperature with magnet	60 °C
Minimum ambient temperature with magnet	-10 °C

Number of pneumatic connections	2 pcs.
Pneumatic input connection	G 3/8
Mode of operation of drive	Double acting
Theoretical cylinder force, advance stroke (at 0.5 MPa)	10,053 N
Theoretical cylinder force, return stroke (at 0.5 MPa)	9,425 N
Maximum piston speed	500 mm/s
Piston rod end	Male thread
Geometric form of the piston rod	Single rod
Male thread of rod end	M36 x 1.5
Female thread of rod end	M24 x 3
Minimum piston speed	50 mm/s
Weight	9.750 Kg



Dimensions

通し穴/C型Q2B

φ125~φ160



φ180, φ200




シリーズ内径 (mm)	標準ストローク範囲	A	B	C	D	E	H	J	K	L	M	M ₁	M ₂	N	OA	OB	Q	RA	RB	W
125	10, 20, 30, 40, 50	99.6	37.5	30	36	140	M22×2.5	11	32	16	11.4	—	—	37.5	M14×2	21	24.5	25	18.4	15.3
140	10, 20, 30, 40, 50	124.0	37.5	30	36	154	M22×2.5	10	32	16	12.0	—	—	37.5	M14×2	21	24.5	25	18.4	16.0
160	75, 100, 125, 150	136.0	41.2	33.4	40	174	M24×3	10	36	17	14.4	—	—	34.5	M16×2	24	27.7	27	21	16.8
180	175, 200, 250, 300	152.0	43	33.4	40	204	M24×3	3	36	17	16.2	52	52	19	M22×2.5	31.5	29	30	26	—
200		174.0	46	33.4	40	224	M24×3	7	36	17	16.2	62	62	19	M22×2.5	31.5	30	30	26	—

注1) 通し穴でシリングも取付ける場合は、外筒の厚さを必ずご使用ください。

注2) φ125~φ160の10ストローク以下およびφ180, φ200の20ストローク以下の場合は、OAに差し替えます。

ロッド先端ねじ




シリーズ内径 (mm)	B1	C1	H1	L1	MM	X
125	40	42	10	50	M20×1.5	45
140	40	42	10	50	M20×1.5	45
160	55	47	21	64	M20×1.5	50
180	55	47	21	64	M20×1.5	50
200	55	47	21	64	M20×1.5	50


※ロッド先端ナットの取付位置は2P, 2B

Constructions

Standard

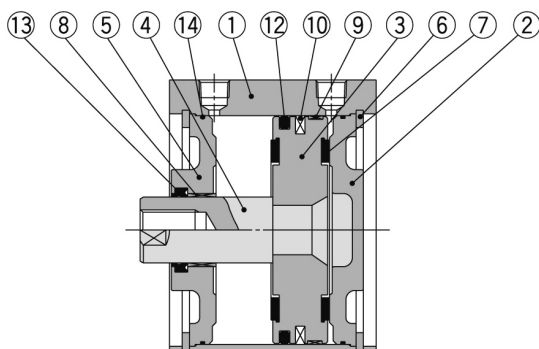

Rod end male thread

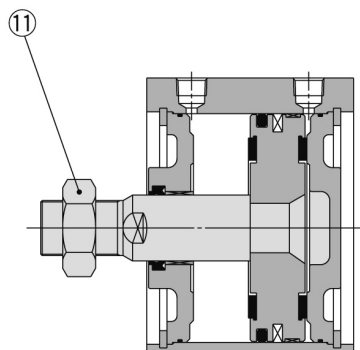

Component Parts

No.	Description	Material	Note
1	Cylinder tube	Aluminum alloy	Hard anodised
2	Head cover	Carbon steel	Nickel plated
3	Piston	Aluminum alloy	Chromated
4	Piston rod	Carbon steel	Hard chrome plated
5	Rod cover	Carbon steel	Nickel plated
6	Retaining ring	Carbon tool steel	Phosphate coated
7	Bumper	Urethane	
8	Bushing	Bearing alloy	
9	Wear ring	Resin	
10	Magnet	—	For CDQ2B□ only
11	Rod end nut	Carbon steel	Nickel plated
12	Piston seal	NBR	
13	Rod seal	NBR	
14	Tube gasket	NBR	

Replacement Parts/Seal Kit

Bore size (mm)	Kit no.	Contents
125	CQ2B125-PS	Kits include items 12, 13, 14 from the table.
140	CQ2B140-PS	
160	CQ2B160-PS	
180	CQ2B180-PS	
200	CQ2B200-PS	

* Seal kit includes 12, 13, 14. Order the seal kit, based on each bore size.
 * Since the seal kit does not include a grease pack, order it separately.

Grease pack part no.: GR-S-010 (10 g)

Additional information

Catalogue

[CQ2-Z-D_EU.pdf](#)

Operation manuals

[OM_CQ2x_OM0002MEN.pdf](#)