


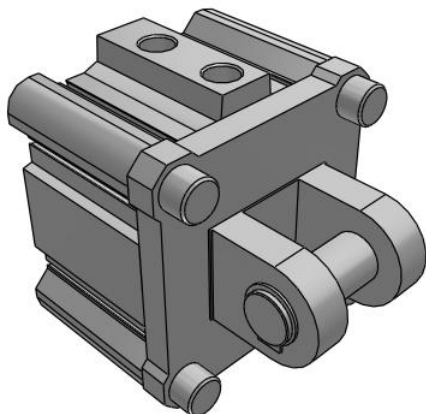

C(D)Q2, Compact Cylinder, Double Acting, Single Rod w/Auto Switch Mounting Groove CDQ2D100-10DZ

Datasheet

General Series Information


- Double acting, single rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

Standard specifications

Magnet	D (Built-in)
Mounting	D (Double Clevis)
Type	Standard
Bore Size	Ø100 mm
Port Thread Type	Rc
Lube-retainer	Without Stable Lubrication Function
Stroke	10
Body Option	Standard [Rod End Female Thread]
Auto Switch Groove	None, also for 12-25 Bore w/o Magnet
Mounting Bolt	None
Rod End Bracket	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	Z (5 m)
Number	2 pcs.
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Made of Stainless Steel	None

Fluororubber Seal	None
-	Compressed air
Weight	4.000 Kg

Dimensions



ニ山クレビス形													(mm)							
タイプ	ニ山	ク	レ	ビ	ス	形	ポート	スイ	ツ	キ	ポート	スイ	ツ	キ	付	CD	CT	CUC	WC	CX
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	A	B	CL	A	B	CL	A	B	CL					
63	10	50	10	50	10	50	6	8	32	14	9	45	65	64	14	8	20	30	22	
80	10	50	10	50	10	50	10	12	40	18	10	53	5	15	18	10	27	38		
100	10	50	10	50	10	50	12	15	50	20	12	63	10	25	22	13	31	45	32	
160	10	50	10	50	10	50	18	22	75	30	18	90	15	35	30	20	45	60	40	

タイプ	ニ山	ク	レ	ビ	ス	形	CZ	L	L	N	RR	ニ山クレビス 金具材料 諸寸 表面処理・塗装			
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)									
63	10	50	10	50	10	50	44	8	13.5	W10x1.5	14				
80	10	50	10	50	10	50	56	10	43.5	M12x1.5	18				
100	10	50	10	50	10	50	64	12	43.5	M12x1.5	22				

Additional information

Catalogue

[CQ2-Z-B_EU.pdf](#)