


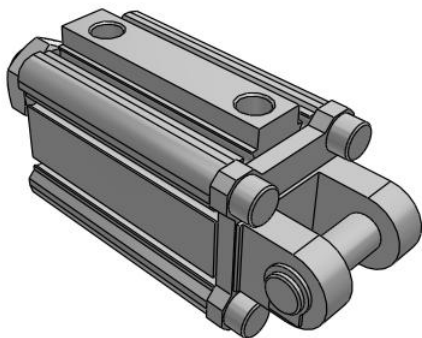


C(D)Q2, Compact Cylinder, Double Acting, Single Rod w/Auto Switch Mounting Groove CDQ2D32-35DMZ

- Double acting, single rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

Magnet	D (Built-in)
Mounting	D (Double Clevis)
Type	Standard
Bore Size	Ø32 mm
Port Thread Type	Rc
Lube-retainer	Without Stable Lubrication Function
Stroke	35
Body Option	M [Rod End Male Thread]
Auto Switch Groove	None, also for 12-25 Bore w/o Magnet
Mounting Bolt	None
Rod End Bracket	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	Z (5 m)
Number	2 pcs.
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Made of Stainless Steel	None

Fluororubber Seal	None
-	Compressed air
Weight	0.473 Kg

ニ山クレビス形/CQ2D・CDQ2D



二山クレビス形

ニ山クレスチン形 (mm)

サイズ (mm)	A	B	C	A+B	A+B+C	D	E	F	G	H	I	J	K	L	M
32	25.00	20.00	10.00	45.00	55.00	14.00	20.00	16.00	7.00	14.00	20.00	16.00	7.00	14.00	20.00
40	30.00	25.00	12.00	55.00	67.00	16.00	22.00	18.00	8.00	16.00	22.00	18.00	8.00	16.00	22.00
50	35.00	30.00	15.00	65.00	80.00	18.00	24.00	20.00	10.00	18.00	24.00	20.00	10.00	18.00	24.00

ニ山クレスチン形全長寸法 (mm)

サイズ (mm)	N	RR
32	105±1.0	105±1.0
40	125±1.0	125±1.0
50	145±1.0	145±1.0

※ロット間寸法差および許容公差につきましてはP.004の表をご参照ください。
※ニ山クレスチン用ピンと止め釘が付属されます。

-

-

CQ2-Z-B_EU.pdf