


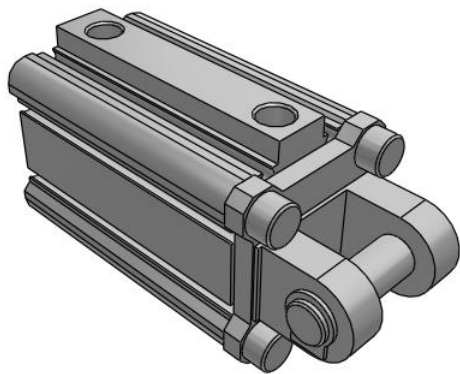


C(D)Q2, Compact Cylinder, Double Acting, Single Rod w/Auto Switch Mounting Groove CDQ2D32-40DZ

- Double acting, single rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

Magnet	D (Built-in)
Mounting	D (Double Clevis)
Type	Standard
Bore Size	Ø32 mm
Port Thread Type	Rc
Lube-retainer	Without Stable Lubrication Function
Stroke	40
Body Option	Standard [Rod End Female Thread]
Auto Switch Groove	None, also for 12-25 Bore w/o Magnet
Mounting Bolt	None
Rod End Bracket	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	Z (5 m)
Number	2 pcs.
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Made of Stainless Steel	None
Fluororubber Seal	None

-	Compressed air
---	----------------

二山ワレビス形/CDQ2D-CDQ2D



二山ワレビス形

寸法	N	RR
100	100	100
120	120	120
140	140	140
160	160	160
180	180	180
200	200	200
220	220	220
240	240	240
260	260	260
280	280	280
300	300	300
320	320	320
340	340	340
360	360	360
380	380	380
400	400	400
420	420	420
440	440	440
460	460	460
480	480	480
500	500	500
520	520	520
540	540	540
560	560	560
580	580	580
600	600	600
620	620	620
640	640	640
660	660	660
680	680	680
700	700	700
720	720	720
740	740	740
760	760	760
780	780	780
800	800	800
820	820	820
840	840	840
860	860	860
880	880	880
900	900	900
920	920	920
940	940	940
960	960	960
980	980	980
1000	1000	1000

-

-

CQ2-Z-B_EU.pdf