


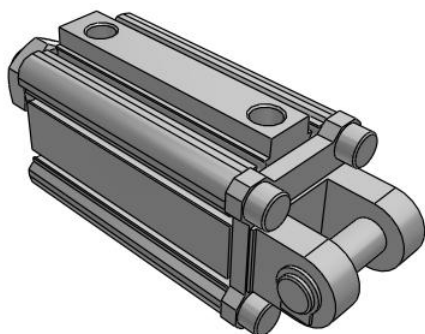

C(D)Q2, Compact Cylinder, Double Acting, Single Rod w/Auto Switch Mounting Groove


CDQ2D32-45DMZ

- Double acting, single rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

Magnet	D (Built-in)
Mounting	D (Double Clevis)
Type	Standard
Bore Size	Ø32 mm
Port Thread Type	Rc
Lube-retainer	Without Stable Lubrication Function
Stroke	45
Body Option	M [Rod End Male Thread]
Auto Switch Groove	None, also for 12-25 Bore w/o Magnet
Mounting Bolt	None
Rod End Bracket	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	Z (5 m)
Number	2 pcs.
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Made of Stainless Steel	None

Fluororubber Seal	None
-	Compressed air
Weight	0.513 Kg

ニ山クレビス形/CQ2D・CDQ2D



二山クレビス形

ニ山クレスチン形 (mm)

サイズ (mm)	A	B	C	L	S	C	D	C	D	C	C	Z	L	L
32	10-20	10-20	10-20	70	33	60	10	5	14	20	18	36	7	35
40	10-20	10-20	10-20	70	33	60	10	5	14	20	18	36	7	35
50	10-20	10-20	10-20	70	33	60	10	5	14	20	18	36	7	35
60	10-20	10-20	10-20	70	33	60	10	5	14	20	18	36	7	35

ニ山クレスチン形全長寸法 (mm)

サイズ (mm)	N	RR
32	105±1.0	10
40	105±1.0	10
50	105±1.0	10
60	105±1.0	10

※ロット間寸法および付随金具につきましてはP.004の表をご参照ください。
※ニ山クレスチン用ピンと止めねじは付属されません。

-

-

CQ2-Z-B_EU.pdf