


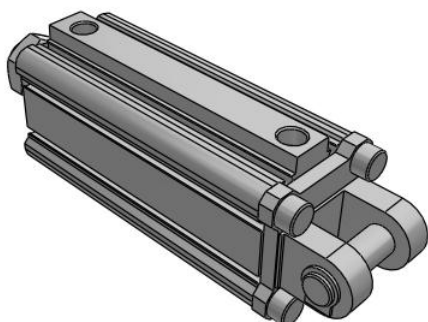

C(D)Q2, Compact Cylinder, Double Acting, Single Rod w/Auto Switch Mounting Groove CDQ2D32-75DCMZ

Datasheet

General series information


- Double acting, single rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

Standard specifications

Magnet	D (Built-in)
Mounting	D (Double Clevis)
Type	Standard
Bore Size	Ø32 mm
Port Thread Type	Rc
Lube-retainer	Without Stable Lubrication Function
Stroke	75
Body Option	CM [Rubber Bumper + Rod End Male Thread]
Auto Switch Groove	None, also for 12-25 Bore w/o Magnet
Mounting Bolt	None
Rod End Bracket	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	Z (5 m)
Number	2 pcs.
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Made of Stainless Steel	None

Fluororubber Seal	None
-	Compressed air
Weight	0.630 Kg

Dimensions



ニ山クレブシ形												(mm)
ナット径	ナット高	ボルト径				ボルト高				ボルト径		
		A	B	C	L	A	B	C	L	DO	CT	DO
32	75.100	100	210	100	30	130	30	160	30	5	14	20.2
40	75.100	100	210	100	30	130	30	160	30	7	14	20.2
50	75.100	100	210	100	30	130	30	160	30	9	14	20.2
60	75.100	100	210	100	30	130	30	160	30	11	14	20.2
70	75.100	100	210	100	30	130	30	160	30	13	14	20.2
80	75.100	100	210	100	30	130	30	160	30	15	14	20.2
90	75.100	100	210	100	30	130	30	160	30	17	14	20.2
100	75.100	100	210	100	30	130	30	160	30	19	14	20.2
110	75.100	100	210	100	30	130	30	160	30	21	14	20.2
120	75.100	100	210	100	30	130	30	160	30	23	14	20.2
130	75.100	100	210	100	30	130	30	160	30	25	14	20.2
140	75.100	100	210	100	30	130	30	160	30	27	14	20.2
150	75.100	100	210	100	30	130	30	160	30	29	14	20.2
160	75.100	100	210	100	30	130	30	160	30	31	14	20.2
170	75.100	100	210	100	30	130	30	160	30	33	14	20.2
180	75.100	100	210	100	30	130	30	160	30	35	14	20.2
190	75.100	100	210	100	30	130	30	160	30	37	14	20.2
200	75.100	100	210	100	30	130	30	160	30	39	14	20.2
210	75.100	100	210	100	30	130	30	160	30	41	14	20.2
220	75.100	100	210	100	30	130	30	160	30	43	14	20.2
230	75.100	100	210	100	30	130	30	160	30	45	14	20.2
240	75.100	100	210	100	30	130	30	160	30	47	14	20.2
250	75.100	100	210	100	30	130	30	160	30	49	14	20.2
260	75.100	100	210	100	30	130	30	160	30	51	14	20.2
270	75.100	100	210	100	30	130	30	160	30	53	14	20.2
280	75.100	100	210	100	30	130	30	160	30	55	14	20.2
290	75.100	100	210	100	30	130	30	160	30	57	14	20.2
300	75.100	100	210	100	30	130	30	160	30	59	14	20.2
310	75.100	100	210	100	30	130	30	160	30	61	14	20.2
320	75.100	100	210	100	30	130	30	160	30	63	14	20.2
330	75.100	100	210	100	30	130	30	160	30	65	14	20.2
340	75.100	100	210	100	30	130	30	160	30	67	14	20.2
350	75.100	100	210	100	30	130	30	160	30	69	14	20.2
360	75.100	100	210	100	30	130	30	160	30	71	14	20.2
370	75.100	100	210	100	30	130	30	160	30	73	14	20.2
380	75.100	100	210	100	30	130	30	160	30	75	14	20.2
390	75.100	100	210	100	30	130	30	160	30	77	14	20.2
400	75.100	100	210	100	30	130	30	160	30	79	14	20.2
410	75.100	100	210	100	30	130	30	160	30	81	14	20.2
420	75.100	100	210	100	30	130	30	160	30	83	14	20.2
430	75.100	100	210	100	30	130	30	160	30	85	14	20.2
440	75.100	100	210	100	30	130	30	160	30	87	14	20.2
450	75.100	100	210	100	30	130	30	160	30	89	14	20.2
460	75.100	100	210	100	30	130	30	160	30	91	14	20.2
470	75.100	100	210	100	30	130	30	160	30	93	14	20.2
480	75.100	100	210	100	30	130	30	160	30	95	14	20.2
490	75.100	100	210	100	30	130	30	160	30	97	14	20.2
500	75.100	100	210	100	30	130	30	160	30	99	14	20.2

Additional information

Catalogue

[CQ2-Z-B_EU.pdf](#)