


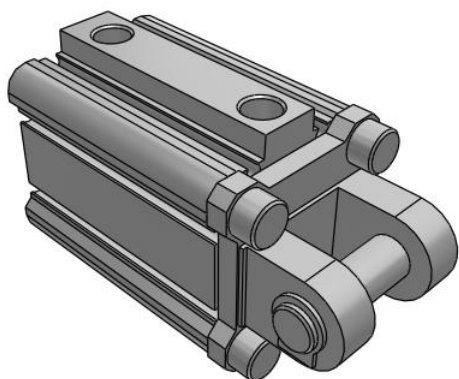

C(D)Q2, Compact Cylinder, Double Acting, Single Rod w/Auto Switch Mounting Groove


CDQ2D32TF-30DZ

- Double acting, single rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

Magnet	D (Built-in)
Mounting	D (Double Clevis)
Type	Standard
Bore Size	Ø32 mm
Port Thread Type	TF
Lube-retainer	Without Stable Lubrication Function
Stroke	30
Body Option	Standard [Rod End Female Thread]
Auto Switch Groove	None, also for 12-25 Bore w/o Magnet
Mounting Bolt	None
Rod End Bracket	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	Z (5 m)
Number	2 pcs.
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Made of Stainless Steel	None

Fluororubber Seal	None
-	Compressed air
Weight	0.410 Kg

二山ワレビス形/CDQ2D-CDQ2D



二山ワレビス形

寸法	N	RR
22	40	50
32	40	50
40	40	50
50	40	50
60	40	50
70	40	50
80	40	50
90	40	50
100	40	50
120	40	50
150	40	50
200	40	50
250	40	50
300	40	50
350	40	50
400	40	50
450	40	50
500	40	50
550	40	50
600	40	50
650	40	50
700	40	50
750	40	50
800	40	50
850	40	50
900	40	50
950	40	50
1000	40	50

-
-

CQ2-Z-B_EU.pdf