


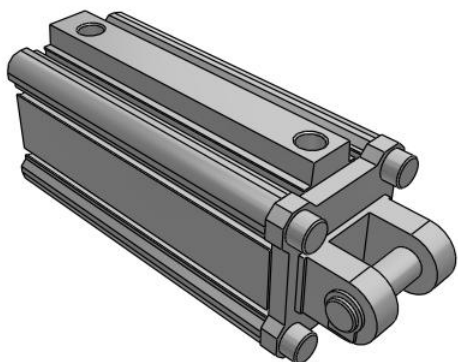

C(D)Q2, Compact Cylinder, Double Acting, Single Rod w/Auto Switch Mounting Groove CDQ2D40-75DZ

Datasheet

- Double acting, single rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.


Standard specifications

Magnet	D (Built-in)
Mounting	D (Double Clevis)
Type	Standard
Bore Size	Ø40 mm
Port Thread Type	Rc
Lube-retainer	Without Stable Lubrication Function
Stroke	75
Body Option	Standard [Rod End Female Thread]
Auto Switch Groove	None, also for 12-25 Bore w/o Magnet
Mounting Bolt	None
Rod End Bracket	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	Z (5 m)
Number	2 pcs.
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Made of Stainless Steel	None
Fluororubber Seal	None

-	Compressed air
---	----------------

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

Dimensions



ニ山クレブシ形											(mm)
ナット径	ナット高	ボルト径				ボルト高					
		A	B	C	L	A	B	C	L	DO	CT
32	75.100	100	210	100	30	100	210	100	30	14	20
40	75.100	100	210	100	30	100	210	100	30	14	20
50	75.100	100	210	100	30	100	210	100	30	14	20
60	75.100	100	210	100	30	100	210	100	30	14	20
70	75.100	100	210	100	30	100	210	100	30	14	20
80	75.100	100	210	100	30	100	210	100	30	14	20
90	75.100	100	210	100	30	100	210	100	30	14	20
100	75.100	100	210	100	30	100	210	100	30	14	20
110	75.100	100	210	100	30	100	210	100	30	14	20
120	75.100	100	210	100	30	100	210	100	30	14	20
130	75.100	100	210	100	30	100	210	100	30	14	20
140	75.100	100	210	100	30	100	210	100	30	14	20
150	75.100	100	210	100	30	100	210	100	30	14	20
160	75.100	100	210	100	30	100	210	100	30	14	20
170	75.100	100	210	100	30	100	210	100	30	14	20
180	75.100	100	210	100	30	100	210	100	30	14	20
190	75.100	100	210	100	30	100	210	100	30	14	20
200	75.100	100	210	100	30	100	210	100	30	14	20
210	75.100	100	210	100	30	100	210	100	30	14	20
220	75.100	100	210	100	30	100	210	100	30	14	20
230	75.100	100	210	100	30	100	210	100	30	14	20
240	75.100	100	210	100	30	100	210	100	30	14	20
250	75.100	100	210	100	30	100	210	100	30	14	20
260	75.100	100	210	100	30	100	210	100	30	14	20
270	75.100	100	210	100	30	100	210	100	30	14	20
280	75.100	100	210	100	30	100	210	100	30	14	20
290	75.100	100	210	100	30	100	210	100	30	14	20
300	75.100	100	210	100	30	100	210	100	30	14	20
310	75.100	100	210	100	30	100	210	100	30	14	20
320	75.100	100	210	100	30	100	210	100	30	14	20
330	75.100	100	210	100	30	100	210	100	30	14	20
340	75.100	100	210	100	30	100	210	100	30	14	20
350	75.100	100	210	100	30	100	210	100	30	14	20
360	75.100	100	210	100	30	100	210	100	30	14	20
370	75.100	100	210	100	30	100	210	100	30	14	20
380	75.100	100	210	100	30	100	210	100	30	14	20
390	75.100	100	210	100	30	100	210	100	30	14	20
400	75.100	100	210	100	30	100	210	100	30	14	20

Additional information

Catalogue

[CQ2-Z-B_EU.pdf](#)