


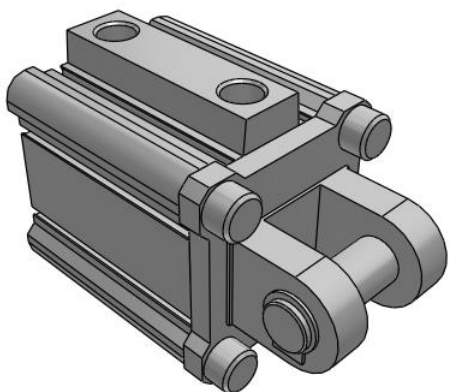


C(D)Q2, Compact Cylinder, Double Acting, Single Rod w/Auto Switch Mounting Groove CDQ2D50-30DZ

- Double acting, single rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

Magnet	D (Built-in)
Mounting	D (Double Clevis)
Type	Standard
Bore Size	Ø50 mm
Port Thread Type	Rc
Lube-retainer	Without Stable Lubrication Function
Stroke	30
Body Option	Standard [Rod End Female Thread]
Auto Switch Groove	None, also for 12-25 Bore w/o Magnet
Mounting Bolt	None
Rod End Bracket	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	Z (5 m)
Number	2 pcs.
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Made of Stainless Steel	None

Fluororubber Seal	None
-	Compressed air
Weight	0.867 Kg

ニ山テレビス形/CQ2D-CDQ2D



二山クレビス形

ニ山クレスチン形 (mm)

サイズ (mm)	A	B	C	L	S	C	D	C	D	C	C	L	L
32	25.00	20.00	70	33	60	10	5	14	20	18	16	36	7
40	30.00	25.00	80	38	68	10	5	14	22	18	16	36	7
50	35.00	30.00	90	43	75	10	5	14	22	22	18	46	8
60	40.00	35.00	100	48	82	10	5	14	22	22	18	46	8

ニ山クレスチン金具類 標準
表面処理 塗装

※ロッドは標準サイズおよび付随金具につきましてはP.004の表をご参照ください。
※ニ山クレスチン用ピンと止めねじは付属されません。

-
-

CQ2-Z-B_EU.pdf