


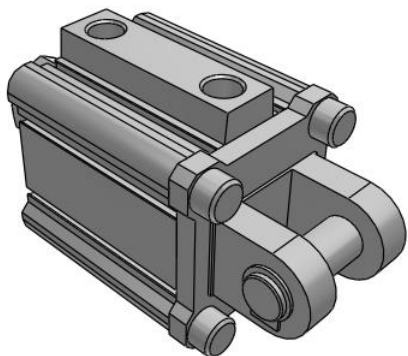

C(D)Q2, Compact Cylinder, Double Acting, Single Rod w/Auto Switch Mounting Groove


CDQ2D50TF-30DMZ

- Double acting, single rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

Magnet	D (Built-in)
Mounting	D (Double Clevis)
Type	Standard
Bore Size	Ø50 mm
Port Thread Type	TF
Lube-retainer	Without Stable Lubrication Function
Stroke	30
Body Option	M [Rod End Male Thread]
Auto Switch Groove	None, also for 12-25 Bore w/o Magnet
Mounting Bolt	None
Rod End Bracket	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	Z (5 m)
Number	2 pcs.
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Made of Stainless Steel	None

Fluororubber Seal	None
-	Compressed air
Weight	1.246 Kg

ニ山クレビス形/CQ2D・CDQ2D



二山クレビス形

ニ山クレスピス (mm)

サイズ (mm)	A	B	C	L	A	B	C	L	D	C	D	C	K	C	Z	L	L
32	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100
40	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100
50	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100

ニ山クレスピス全長: 100mm
表面: 黒色
裏面: 黒色

※ロット単位でおおよそ100個/箱に1つ含まれます。SP-004-0でご確認ください。
※ニ山クレスピス10mmは型式007で100個/箱に1つ含まれます。

-

-

CQ2-Z-B_EU.pdf