


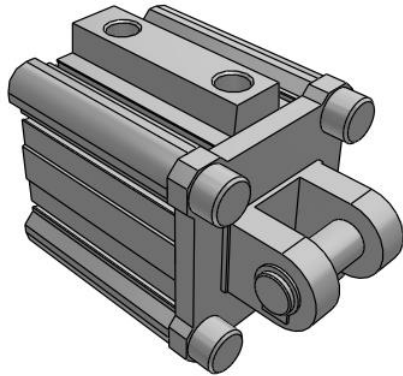


C(D)Q2, Compact Cylinder, Double Acting, Single Rod w/Auto Switch Mounting Groove

CDQ2D63TF-30DMZ

- Double acting, single rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

Magnet	D (Built-in)
Mounting	D (Double Clevis)
Type	Standard
Bore Size	Ø63 mm
Port Thread Type	TF
Lube-retainer	Without Stable Lubrication Function
Stroke	30
Body Option	M [Rod End Male Thread]
Auto Switch Groove	None, also for 12-25 Bore w/o Magnet
Mounting Bolt	None
Rod End Bracket	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	Z (5 m)
Number	2 pcs.
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Made of Stainless Steel	None

Fluororubber Seal	None
-	Compressed air
Weight	1.413 Kg



二山クレブス形												(mm)	
クレーン クワ	クレーン クワ	スロ・クワ		オートスイッチ		オートスイッチ		オートスイッチ		クレーン		クレーン	
		A	B	CL	A	B	CL	CL	CT	CU	CW	CX	CX
60	100	100	100	98	62	54	98	98	46	84	14	20	20
80	100	100	100	102	62	54	102	102	53	105	18	10	27
100	100	100	100	121	63	120	142	63	120	22	13	31	45
120	100	100	100	142	63	120	142	63	120	22	13	31	45

-

-

CQ2-Z-B_EU.pdf